




PAVER CHAINS

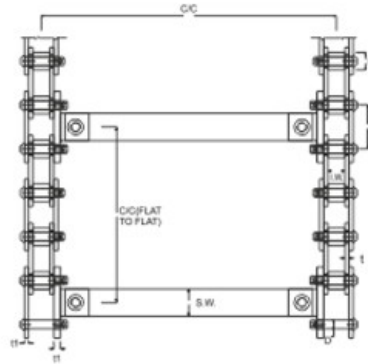

For Asphalt Application



For WetMix Application

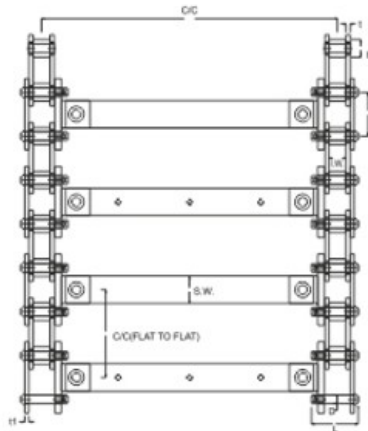

Technical Specifications

CHAIN NO.	PITCH P	I.W.	LINK			BUSH/ROLLER ØB	PIN ØD	C/C	C/C (flat to flat)	
			W (width)	t (inner)	t1 (outer)				Asphalt	WetMix
TRE-PAV-01	80	31	50	7.5	7.5	32	15.7	540	320	160
TRE-PAV-02	80	31	50	7.5	7.5	32	15.7	480	320	160
TRE-PAV-03	80	31	50	7.5	7.5	32	15.7	500	320	160
TRE-PAV-04	80	34	46	7.5	6	28	15.7	560	480	160
TRE-PAV-05	80	34	46	7.5	6	28	15.7	510	480	160
TRE-PAV-06	70	34	40	5	6	30	15	540	560	140
TRE-PAV-07	80	35.5	40	8	6	36	18	505	320	160
TRE-PAV-08	84	26	40	8	8	24	15.7	470	336	168
TRE-PAV-09	80	26	32	5	5	20	14	480	320	160

- We also design these chains with suitable selection of special steel grades to increase the wear resistivity of chains for longer life.
- Chains are also Available as per Client Specifications.



An ISO 9001-2008 Certified Company

ALL DIMENSIONS ARE IN MM.