




OLIVE L.E.D.[®]

The light you can trust

An ISO 9001:2008 Certified Company

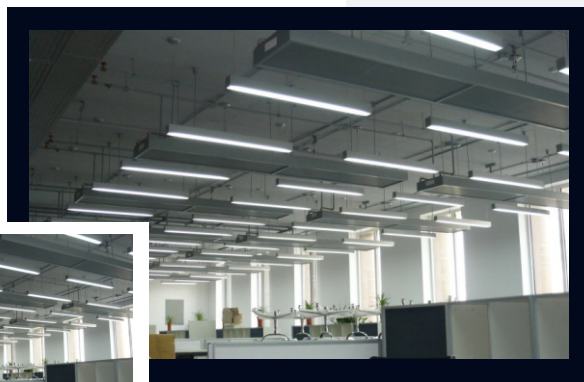

Litex LED - Rack Optic

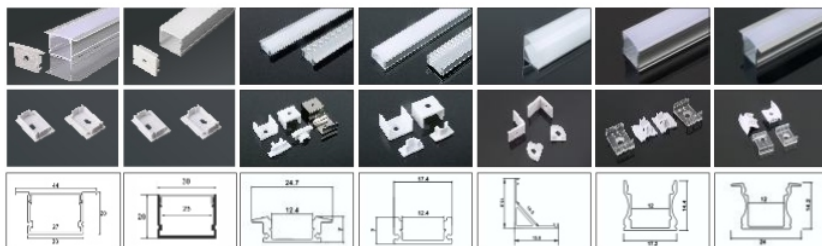

Model No. Liner Lights/Profile Lights

Housing Specification

Body Material	Aluminum Extrusion
Dimensionn	1-8 feet Optional
Weight	0.5-4 kg
Ingress Protection	IP-54
Cover	Acrylic
Gasket	Silicon
Accessories	Stainless Steel
Paint	Powder Coating
Mounting	Hanging Wiires
Power Cord	0.75mm ² triple shield wire
Certificate	CE, RoHS, BIS, FCC, BEE

Technical Specifications

Voltage Range	90V-290V AC
Power Consumption	As per sheet below
PF	>0.95
THD	<10%
Phase type	Single phase
Internal wiring	Teflon
Input wire	3 Core (Red Phase, Black Neutral, Green Ground)
Frequency	50Hz-60Hz
Efficiency	>85%
Illuminance Design	LED + Lenses
Storage Temperature	-25°C ~ +65°C(Best 25°C)

Lighting Specifications

Available wattages	10-70 watts
No. of LEDs	10-70
Lumens Output (Datasheet)	145 lumens/Watts
Color Temperature	2800~6500k(optional)
Beam Angle	25° to 60°
CRI	>80 Ra
Operating Temp.	-40°C to 60°C
Life Span	>50000H