

AN ISO 9001:2015 CERTIFIED COMPANY



■ EPOXY GROUT

■ TILE GROUT

■ WHITE CEMENT

■ TILES SPACER & LEVELING SYSTEM

■ SOLVENT CEMENT

■ CONSTRUCTION CHEMICAL



**EPOXY GROUT | TILES GROUT | WHITE CEMENT
CONSTRUCTION CHEMICAL | TILES SPACERS AND
LEVELLING SYSTEM**



EPOXY GROUT



TECHNICAL SPECIFICATIONS

Pot Life	: 50 ± 10 Minutes
Compressive Strength	: ≥ 51.00 N/mm ²
Tensile (Split) Strength	: ≥ 11.50 N/mm ²
Shear Bonding Strength	: ≥ 6.0 N/mm ²
Water Absorption (30 minutes)	: < 0.5 %
Flexural Strength	: > 30 N/mm ² (7 Days)
Color Shade	: Multiple

RECOMMENDED APPLICATION

Ceramic, Porcelain, Vitrified tiles, Glass mosaics
Marble, Terrazzo, Natural stone, China mosaics

KEY FEATURES & BENEFITS

Hygienic & dust free, Excellent resistant to a wide range of chemicals, acid, solvent & stain etc,
Excellent water resistant
Excellent compressive, tensile & flexural strength

EPOXY GROUT SPARKLE



TECHNICAL SPECIFICATIONS

Pot Life	: 50 ± 10 Minutes
Compressive Strength	: ≥ 51.00 N/mm ²
Tensile (Split) Strength	: ≥ 11.50 N/mm ²
Shear Bonding Strength	: ≥ 6.0 N/mm ²
Water Absorption (30 minutes)	: < 0.5 %
Flexural Strength	: > 30 N/mm ² (7 Days)
Color Shade	: Multiple

RECOMMENDED APPLICATION

Ceramic, Porcelain, Vitrified tiles, Glass mosaics
Marble, Terrazzo, Natural stone, China mosaics

KEY FEATURES & BENEFITS

Hygienic & dust free, Excellent resistant to a wide range of chemicals, acid, solvent & stain etc,
Excellent water resistant
Excellent compressive, tensile & flexural strength

TILE GROUT



TECHNICAL SPECIFICATIONS

Pot Life	: 90 Minutes
Compressive Strength	: ≥ 22.0 N/mm ² @ 28 Days
Water Demand	: 27.3 % by Weight
Water Absorption	: 60 gm / 100 cm
Color Shade	: Multiple
Flexural Strength	: ≥ 6.0 N/mm ² @ 7 Days

RECOMMENDED APPLICATION

Ceramic, Porcelain, Vitrified tiles, Glass mosaics, Glass mosaics, Marble, Terrazzo, Natural stone, China mosaics

KEY FEATURES & BENEFITS

Low cost, multi-purpose grout, Non-staining, non-shrinking Can achieve high early strength Available in various colours

WHITE CEMENT



TECHNICAL WHITE CEMENT

can be used in many constructions Product as follows:
Architectural Precast Construction
In-Ground Pools & Pool Finishes
Exterior Cladding and Siding Products
Terrazzo Flooring

Concrete Block CMU
Concrete Bricks
Concrete Pavers and Paving Stones
Concrete Roof Tile
Cast Stone
Glass Fiber Reinforced Concrete (GFRC)
Tile Grouts

SBR



TECHNICAL SPECIFICATIONS

Appearance	: Milky White Low Viscous Liquid
Specific Gravity	: 1.01 - 0.02 Kg/l
Compressive Strength	: ≥ 30 - 3 N/mm ² @ 28 Days
Flexural Strength	: ≥ 7 N/mm @ 7 Days
Tensile Adhesion	: ≥ 1.5 N/mm ²

RECOMMENDED APPLICATION

Fixing of vitrified tiles or stones on most difficult surfaces.

Installation of ceramic or vitrified tiles, natural stones, glass mosaic on plywood & variety of other substrates.

Applying with cementitious tile grouts.

KEY FEATURES & BENEFITS

Reduces porosity of grout, Reduces staining, Enhances colour

High strength, shock & impact resistant, Dual bonding

Reduces water absorption

TILE LEVELING CLIP'S & WEDGE



LEVELING CLIP

SIZE

1 MM

2 MM

3 MM

4 MM

WEDGE

SIZE


1 MM

2 MM




3 MM

4 MM


REUSABLE TILE LEVELING

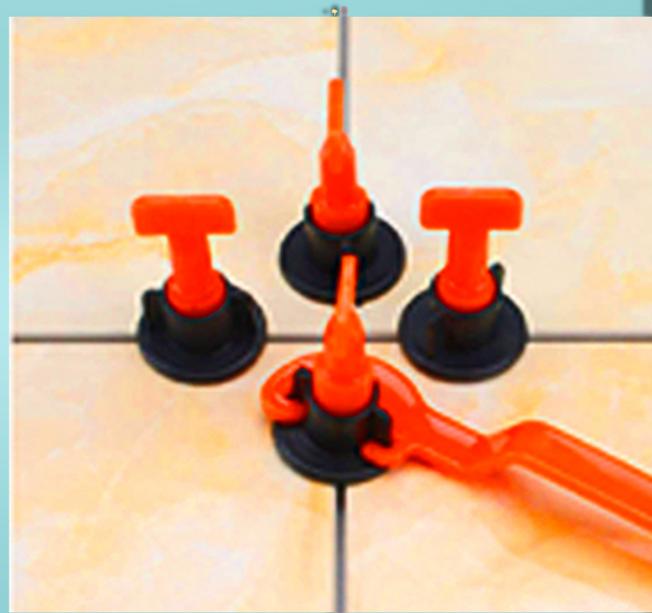

HOLE MAKER TOOL

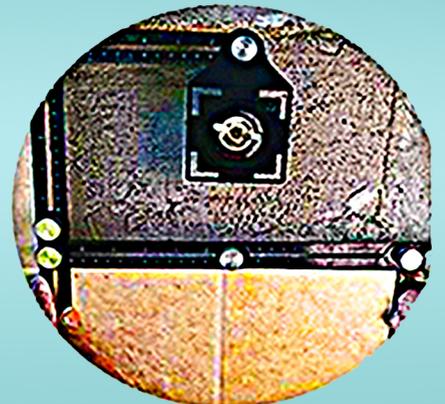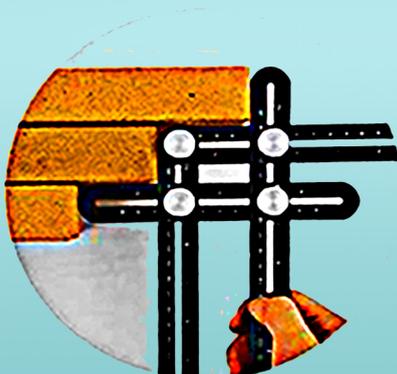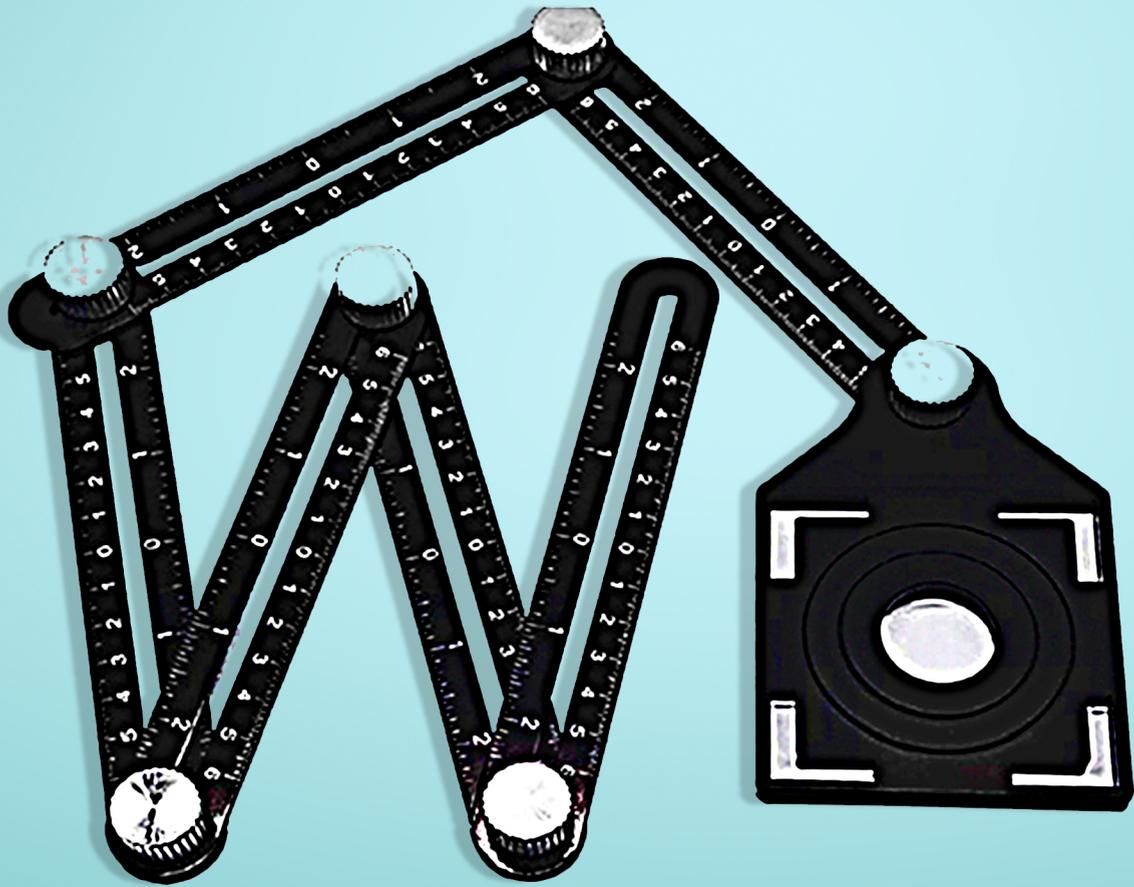


TILE PLIER LEVELING

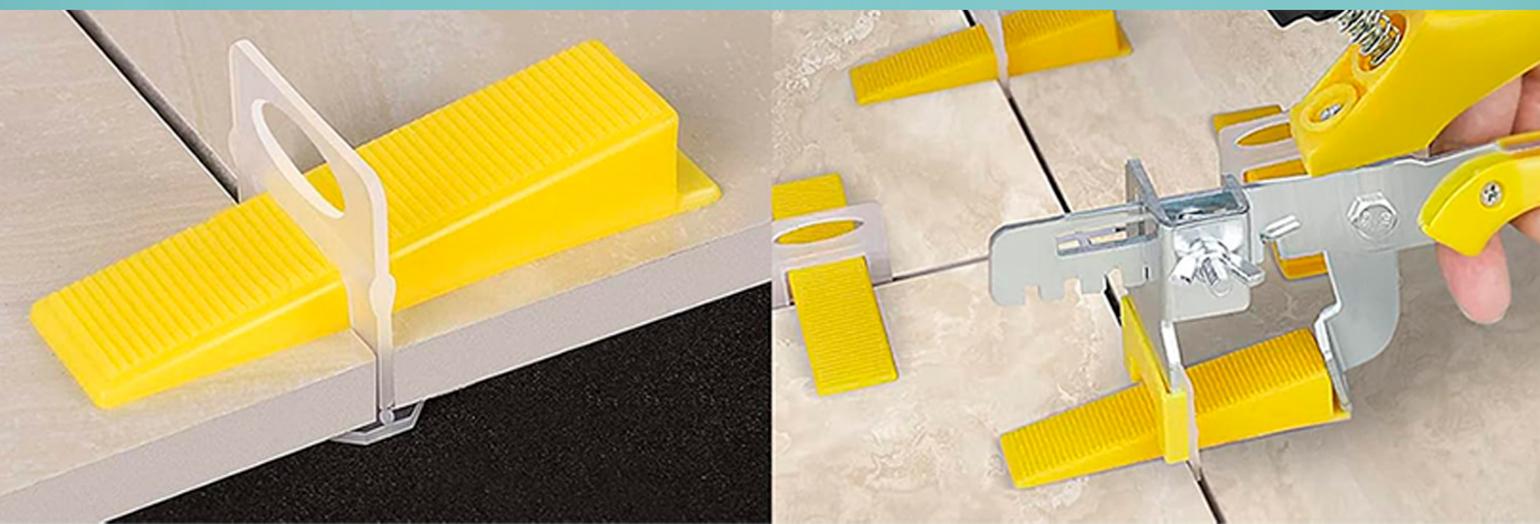





AdolfPlus[®]
TRUST LIKE A FAMILY

TILE TROWEL LEVELING

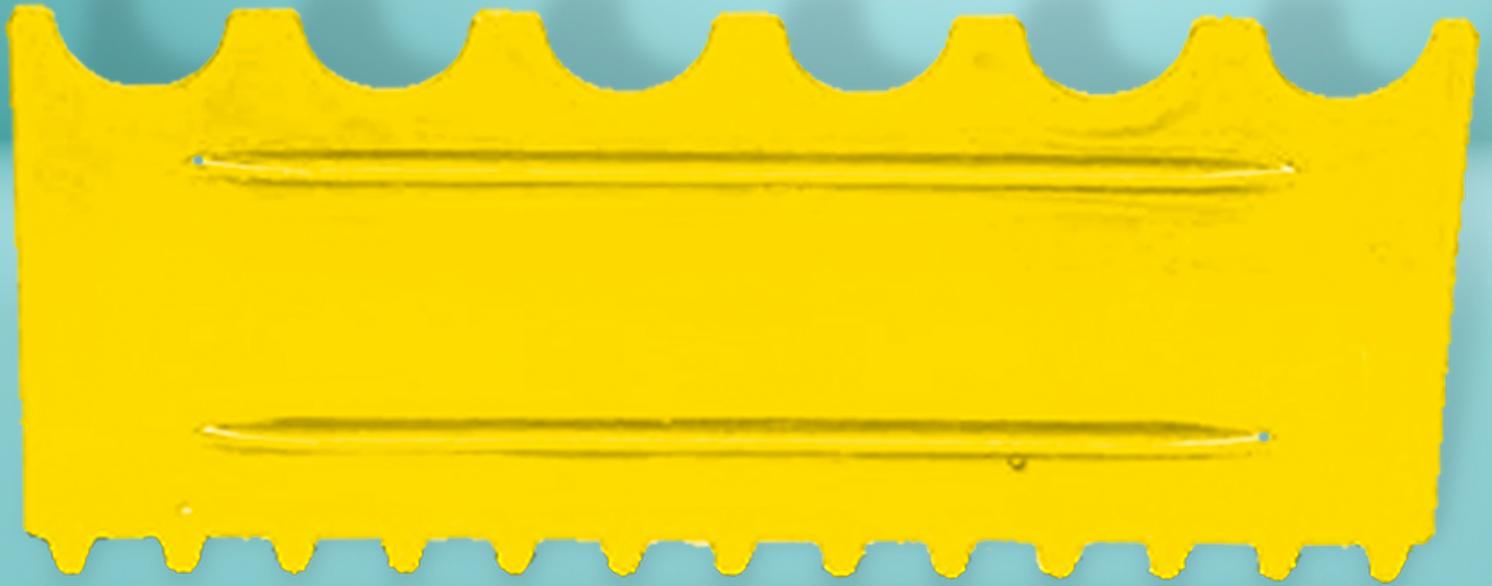

CONTOUR GAUGE TOOL

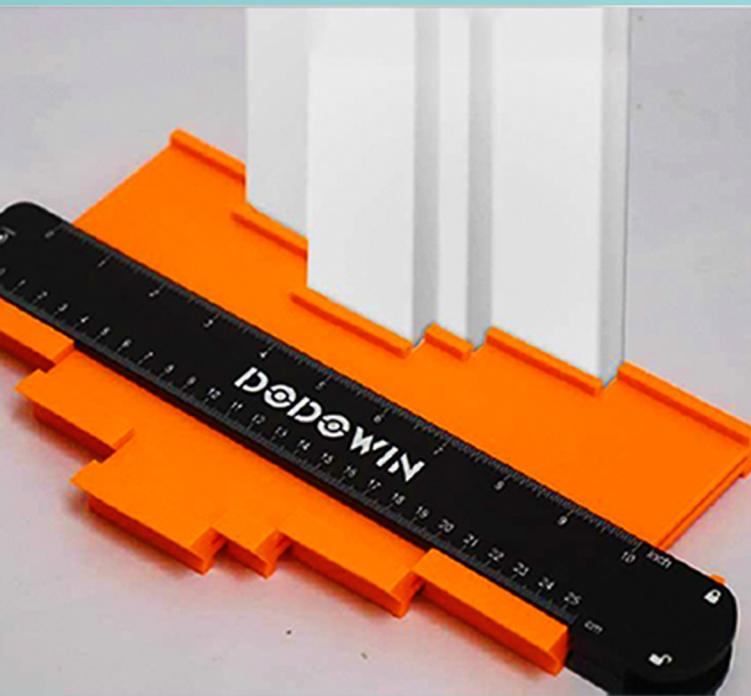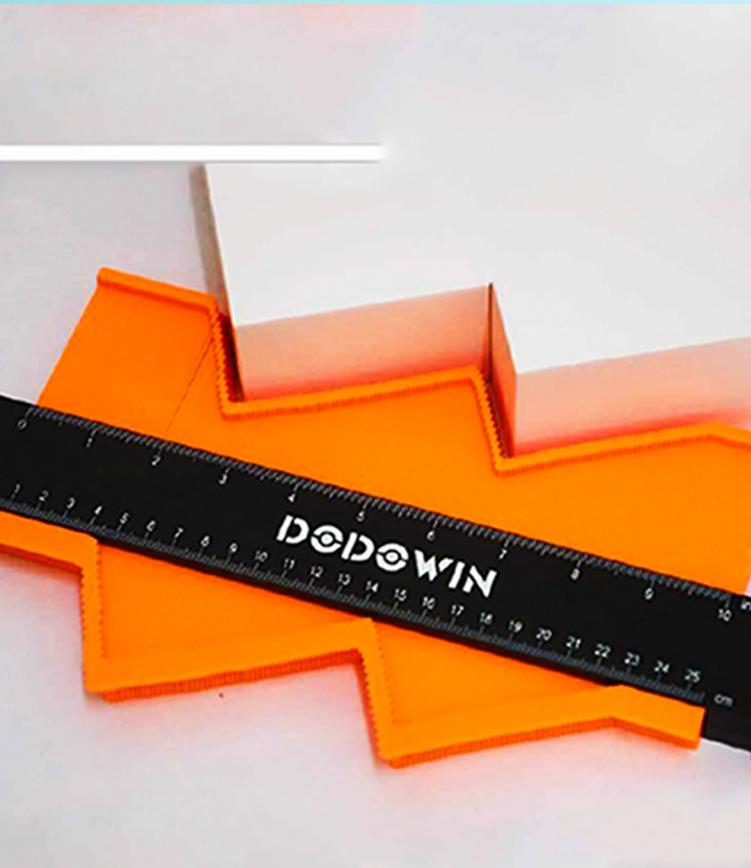

TILE SPACER



TILE SPACER SIZE

2 MM

3 MM

4 MM

5 MM

6 MM

8 MM

10 MM



Manufactured & Marketed By.
TRUEBUILD ENTERPRICE

 Ahmedabad, Gujarat.

 Truebuildenterprise@gmail.com

C.C. No. : 8866665140



FOLLOW US !

