



# OPCIEAS™


## SAFE FOR KEYS

---

### Rosenheim (01001 - 01006) (SAFE FOR KEYS)

Can be equipped with a hammer to smash the glass, metal body, powder coated in red. Door with cylinder lock, incl. 2 keys

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       | Weight kg |     |
|-------|------------------------------|-------|-------|------------------------------|-------|-----------|-----|
|       | Height                       | Width | Depth | Height                       | Width | Depth     |     |
| 01001 | 150                          | 120   | 32    | 148                          | 118   | 31        | 0.5 |
| 01002 | 150                          | 120   | 32    | 148                          | 118   | 31        | 0.6 |
| 01003 | 150                          | 120   | 32    | 148                          | 118   | 31        | 0.6 |
| 01004 | 200                          | 200   | 50    | 198                          | 198   | 49        | 1.0 |
| 01005 | 200                          | 200   | 50    | 198                          | 198   | 49        | 1.0 |
| 01006 | 200                          | 200   | 50    | 198                          | 198   | 49        | 1.0 |

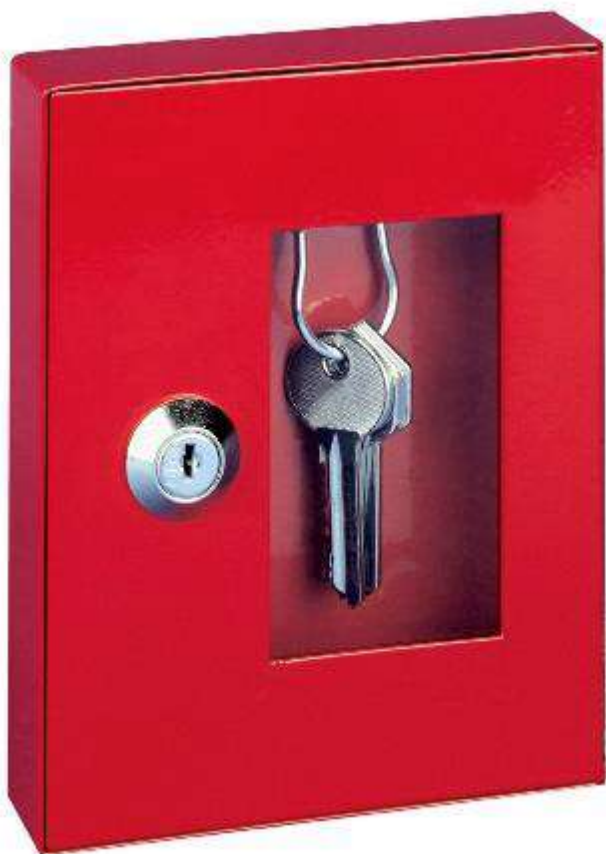



# OPCIEAS™

## SAFE FOR KEYS

### Brandenburg (01500-01508) (SAFE FOR KEYS)

Walls thickness: 3 mm, door with lock, thickness: 3 mm

**Standard option: SAFE FOR KEYS:** Standard safe with electronic lock seals and hinged protective cover.

Lock: electronic DFS S plus class 2 according to EN 1300 B (1 master code + 99 up to users) with history. Door opens 90°, Bolt down holes: 4 in back side (Ø 6 mm), Body made of stainless steel

| CODE | External dimensions in mm |       |       | Internal dimensions in mm |       | Weight kg |     |
|------|---------------------------|-------|-------|---------------------------|-------|-----------|-----|
|      | Height                    | Width | Depth | Height                    | Width | Depth     |     |
| 1500 | 170                       | 240   | 100   | 164                       | 234   | 97        | 5.0 |
| 1501 | 196                       | 266   | 100   | 190                       | 260   | 97        | 5.5 |
| 1503 | 170                       | 240   | 100   | 164                       | 234   | 97        | 5.0 |
| 1504 | 196                       | 266   | 100   | 158                       | 228   | 44        | 5.5 |
| 1505 | 170                       | 240   | 100   | 164                       | 234   | 97        | 5.0 |
| 1506 | 196                       | 266   | 100   | 190                       | 260   | 97        | 5.5 |
| 1507 | 170                       | 240   | 100   | 164                       | 234   | 97        | 5.0 |
| 1508 | 196                       | 266   | 100   | 190                       | 260   | 97        | 5.5 |






# OPCIEAS™

## SAFE FOR KEYS

### BAMBERG (2000-2004) Key wall panel

Key panel is screwed to the wall or furniture. It is easy to trace the concerned keys,  
**Standard option:** Bolt down holes: 4pcs. in rear side(Ø 6 mm). Color: RAL 7035 light grey.

| CODE | External dimensions in mm |       | Weight kg |      |
|------|---------------------------|-------|-----------|------|
|      | Height                    | Width | Depth     |      |
| 2000 | 550                       | 360   | 30        | 3.5  |
| 2001 | 1000                      | 360   | 30        | 6.5  |
| 2002 | 1650                      | 360   | 30        | 11.0 |
| 2003 | 1000                      | 720   | 30        | 13.0 |
| 2004 | 1650                      | 720   | 30        | 22.0 |

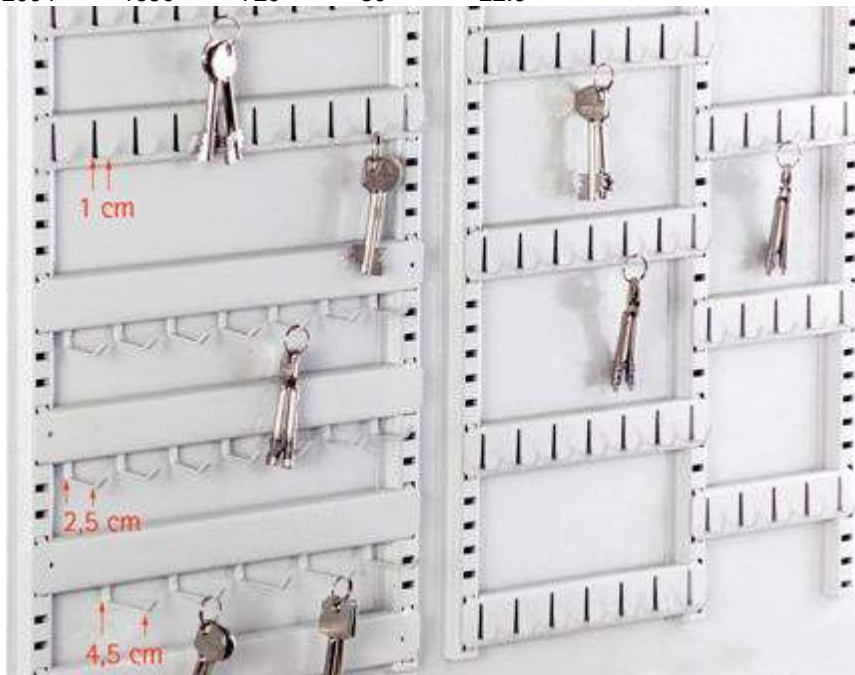



# OPCIEAS™

## SAFE FOR KEYS

---

### FÜRTH (2500-2505) Key wall panel

Key panel is screwed to the wall or furniture. With the help of these panels, keys are always stored comfortably. The panels can be made for an additional fee of stainless steel (for outdoor installation).

With the new system of hooks! The hook can be placed separately in any position. Hooks are made of stainless steel. Hooks can be made with various lengths upon request 20 mm, 30 mm and 40 mm.

**Standard option:** Bolt down holes: 4pcs. in rear side(Ø 6 mm), Color: RAL 7035 light grey

| CODE | External dimensions in mm |       | Weight kg |      |
|------|---------------------------|-------|-----------|------|
|      | Height                    | Width | Depth     |      |
| 2500 | 600                       | 350   | 10        | 1.9  |
| 2501 | 800                       | 350   | 10        | 2.5  |
| 2502 | 1000                      | 500   | 10        | 4.5  |
| 2503 | 1650                      | 500   | 10        | 16.0 |
| 2504 | 1000                      | 750   | 10        | 15.0 |
| 2505 | 1650                      | 750   | 10        | 25.0 |





# OPCIEAS™

## SAFE FOR KEYS

---

### ULM (03000-03008) SAFE FOR KEYS.

Walls thickness: 1 mm, Door with lock, thickness: 1 mm

**Standard option:** Cylinder lock, Door opens to 120°, Bolt down holes: 4 in rear side (Ø 6 mm), Color: RAL 7035 light grey.

| CODE | External dimensions in mm |       | Weight kg |     |
|------|---------------------------|-------|-----------|-----|
|      | Height                    | Width | Depth     |     |
| 3000 | 255                       | 190   | 80        | 1.6 |
| 3001 | 255                       | 190   | 80        | 1.7 |
| 3002 | 255                       | 190   | 130       | 2.0 |
| 3003 | 305                       | 230   | 80        | 2.1 |
| 3004 | 305                       | 230   | 80        | 2.1 |
| 3005 | 305                       | 230   | 80        | 2.2 |
| 3006 | 305                       | 245   | 130       | 2.8 |
| 3007 | 305                       | 245   | 130       | 2.9 |
| 3008 | 305                       | 245   | 130       | 3.8 |





# OPCIEAS™


## SAFE FOR KEYS

---

### PASSAU (06001 - 06011) SAFE FOR KEYS

**Standard option: Single sided body with recessed body • Two or four inner panels • Hook strips can be adjusted by height, color and numbers. As a standard, the door is locked with cylindrical key lock (including 2 keys). In rear side 4 bolt down holes • Color: RAL 7035 light grey**

| • CODE | External dimensions in mm |       |       | Internal dimensions in mm |       | Weight kg |      |
|--------|---------------------------|-------|-------|---------------------------|-------|-----------|------|
|        | Height                    | Width | Depth | Height                    | Width | Depth     |      |
| 6001   | 550                       | 730   | 80    | 548                       | 728   | 79        | 14.5 |
| 6002   | 550                       | 730   | 80    | 548                       | 728   | 79        | 15.0 |
| 6003   | 550                       | 730   | 140   | 548                       | 728   | 139       | 19.0 |
| 6004   | 550                       | 730   | 140   | 548                       | 728   | 139       | 19.5 |
| 6005   | 550                       | 730   | 205   | 548                       | 728   | 204       | 25.5 |
| 6006   | 550                       | 730   | 205   | 548                       | 728   | 204       | 26.0 |
| 6007   | 1300                      | 730   | 250   | 1298                      | 728   | 249       | 59.0 |
| 6008   | 1300                      | 730   | 250   | 1298                      | 728   | 249       | 59.5 |
| 6009   | 1300                      | 730   | 250   | 1298                      | 728   | 249       | 60.0 |
| 6010   | 1300                      | 730   | 250   | 1298                      | 728   | 249       | 60.5 |
| 6011   | 1300                      | 730   | 250   | 1298                      | 728   | 249       | 61.5 |

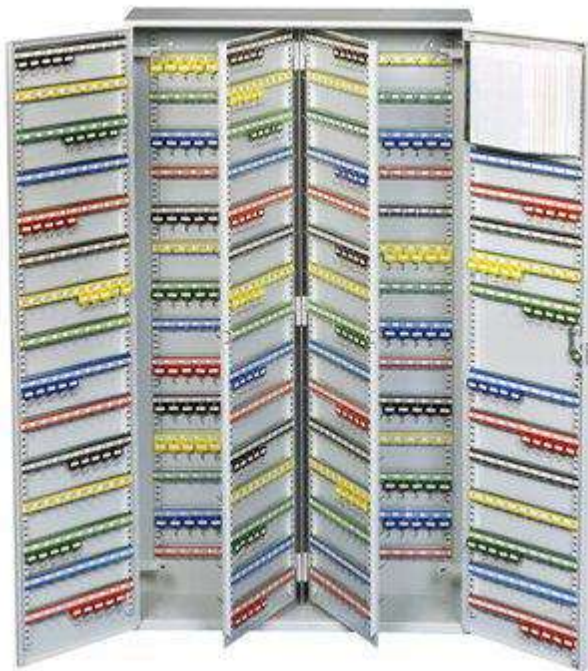





# OPCIEAS™

## SAFE FOR KEYS

---

### HEILBRONN (07000-07008)

**Standard option:** Walls thickness: 1 mm, Door with lock, thickness:1 mm, Recessed door. With the new system of hooks! The hook can be placed separately in any position. Hooks are made of stainless steel. Hooks can be made with various lengths upon request 20 mm, 30 mm and 40 mm. Cylinder lock, Door opens to 120°, Bolt down holes: 4pcs. In rear side (Ø 6 mm), Color: RAL 7035 light grey

| CODE | External dimensions in mm |       |       | Internal dimensions in mm |       | Weight kg |      |
|------|---------------------------|-------|-------|---------------------------|-------|-----------|------|
|      | Height                    | Width | Depth | Height                    | Width | Depth     |      |
| 7000 | 255                       | 190   | 130   | 253                       | 188   | 129       | 3.0  |
| 7001 | 305                       | 240   | 130   | 303                       | 238   | 129       | 3.5  |
| 7002 | 350                       | 270   | 130   | 348                       | 268   | 129       | 4.0  |
| 7003 | 450                       | 300   | 130   | 448                       | 298   | 129       | 6.0  |
| 7004 | 550                       | 380   | 130   | 548                       | 378   | 129       | 8.0  |
| 7005 | 550                       | 380   | 205   | 548                       | 378   | 204       | 13.0 |
| 7006 | 550                       | 730   | 130   | 548                       | 728   | 129       | 16.0 |
| 7007 | 550                       | 730   | 250   | 548                       | 728   | 249       | 27.5 |
| 7008 | 1300                      | 730   | 250   | 1298                      | 728   | 249       | 70.0 |





# OPCIEAS™

## SAFE FOR KEYS

### LEONBERG (07500-07503)

Single-walled body with thickness 1 mm, single walled recessed door 1 mm thick with one or few inner panels, straps for hooks with adjustable height, special straps for long keys. Especially useful in the food industry, ideal for bakeries, meat factories, dairies, grocery stores, etc., or outdoor applications because it is made of stainless steel!

**Standard option:** Cylinder lock, Door opens to 90°, Bolt down holes: 4pcs in rear side (Ø 6 mm), Made of stainless steel

| CODE | External dimensions in mm |       |       | Internal dimensions in mm |       | Weight kg |      |
|------|---------------------------|-------|-------|---------------------------|-------|-----------|------|
|      | Height                    | Width | Depth | Height                    | Width | Depth     |      |
| 7500 | 350                       | 270   | 130   | 348                       | 268   | 129       | 4.0  |
| 7501 | 450                       | 300   | 130   | 448                       | 298   | 129       | 6.5  |
| 7502 | 550                       | 380   | 130   | 548                       | 378   | 129       | 9.0  |
| 7503 | 550                       | 380   | 210   | 548                       | 378   | 209       | 14.0 |







# OPCIEAS™

## SAFE FOR KEYS

### TÜBINGEN (07600-07603)

Single-walled body with thickness 1 mm, Single-walled recessed door with thickness 1 mm with lock, with one or more inner panels, straps for hooks with height adjustable special straps for long keys. This is ideal for the food industry, bakeries, meat factories, dairies, grocery stores and for similar situations as it is made of stainless steel it is suitable for outdoor uses too.

**Standard option:** Cylinder lock, Door opens to 120°, bolt down holes: 4pcs. in rear side(Ø 6 mm) stainless steel.

| CODE | External dimensions in mm |       |       | Internal dimensions in mm |       | Weight kg |      |
|------|---------------------------|-------|-------|---------------------------|-------|-----------|------|
|      | Height                    | Width | Depth | Height                    | Width | Depth     |      |
| 7600 | 350                       | 270   | 130   | 348                       | 268   | 129       | 4.0  |
| 7601 | 450                       | 300   | 130   | 448                       | 298   | 129       | 6.5  |
| 7602 | 550                       | 380   | 130   | 548                       | 378   | 129       | 9.0  |
| 7603 | 550                       | 380   | 210   | 548                       | 378   | 209       | 13.0 |





# OPCIEAS™

## SAFE FOR KEYS

### CELLE 10000-10002

Class: B according to VDMA 24992 issued May 1995.

Walls thickness: 3 mm, multi-walled recessed door with overall thickness 41mm, plate thickness 6 mm, Rigid grasp door construction on the hinge side, straps for hooks with adjustable height, special straps for long keys.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Door opens to 90°, Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light |       | Weight kg |      |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-------|-----------|------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width | Depth     |      |
| 10000 | 230                          | 240   | 110   | 209                          | 224   | 48    | 209        | 152   | 60        | 8.5  |
| 10001 | 300                          | 240   | 110   | 279                          | 224   | 48    | 279        | 152   | 60        | 11.0 |
| 10002 | 400                          | 240   | 110   | 379                          | 224   | 48    | 379        | 152   | 60        | 14.5 |





# OPCIEAS™

## SAFE FOR KEYS

---

### KIEL 11000-11002 Wall key safe

Class: S2 according to PN-EN 14450, Class: B according to VDMA 24992 issued May 1995.

Single-walled body with thickness 2 mm, multi-walled door with overall thickness 52 mm with plate thickness 6 mm bolted with 3-sided locking. Rigid grasp door construction on the hinge side, straps for hooks with height adjustable special straps for long keys.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), handle: folding handle, plastic, protruding 12 mm, door opens to 90°, Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light | Weight kg |       |      |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-----------|-------|------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width     | Depth |      |
| 11000 | 420                          | 420   | 200   | 354                          | 354   | 122   | 354        | 274       | 134   | 22.0 |
| 11001 | 600                          | 420   | 200   | 534                          | 354   | 122   | 534        | 274       | 134   | 30.0 |
| 11002 | 800                          | 420   | 200   | 734                          | 354   | 122   | 734        | 274       | 134   | 40.0 |





# OPCIEAS™

## SAFE FOR KEYS

### HALLE 12000-12002

Class: B according to VDMA 24992 issued May 1995.

Single-walled body with thickness 3 mm, multi-walled door with overall thickness 36 mm with plate thickness 6 mm, bolted with 3-sided locking. Rigid grasp door construction on the hinge side, straps for hooks with height adjustable special straps for long keys.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Door open angle: 90°, Bolt down holes: 2 pieces in the back side (∅ 11 mm), Color: RAL 7035 light grey

| CODE   |       | External dimensions<br>in mm |        |       | Internal dimensions<br>in mm |        |       | Door light | Weight kg |       |
|--------|-------|------------------------------|--------|-------|------------------------------|--------|-------|------------|-----------|-------|
| Height | Width | Depth                        | Height | Width | Depth                        | Height | Width | Depth      | Height    | Depth |
| 12000  | 235   | 245                          | 175    | 229   | 239                          | 124    | 213   | 157        | 136       | 10.0  |
| 12001  | 305   | 245                          | 175    | 299   | 239                          | 124    | 283   | 157        | 136       | 12.5  |
| 12002  | 405   | 245                          | 175    | 399   | 239                          | 124    | 383   | 157        | 136       | 16.0  |





# OPCIEAS™

## SAFE FOR KEYS

### LEIPZIG 13100-13108

Class: S1 according to PN-EN 14450, Class: B according to VDMA 24992 issued May 1995.

Single-walled body with thickness 3 mm, multi-walled door with overall thickness 57 mm with plate thickness 6 mm, bolted with 3-sided locking. Rigid grasp door construction on the hinge side. The new systems of hooks are introduced, it can be placed separately in any position, it is made out of stainless steel and it can be made in various lengths like 20 mm, 30 mm and 40 mm.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Handle: folding handle, plastic, protruding 12 mm, Hinges: external protruding 20 mm, Door opens to 180°, Bolt down holes: 2pcs in bottom 2pcs in back side (Ø 11 mm), Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light | Weight kg |       |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-----------|-------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width     | Depth |
| 13100 | 350                          | 350   | 200   | 344                          | 344   | 123   | 288        | 288       | 20.0  |
| 13101 | 550                          | 500   | 200   | 544                          | 494   | 123   | 488        | 438       | 37.0  |
| 13102 | 800                          | 500   | 200   | 794                          | 494   | 123   | 738        | 438       | 50.0  |
| 13103 | 1000                         | 600   | 200   | 994                          | 594   | 123   | 938        | 538       | 70.0  |
| 13104 | 1200                         | 600   | 200   | 1194                         | 594   | 123   | 1138       | 538       | 85.0  |
| 13105 | 1500                         | 600   | 200   | 1494                         | 594   | 123   | 1438       | 538       | 100.0 |
| 13106 | 1000                         | 1000  | 200   | 994                          | 994   | 123   | 938        | 938       | 102.0 |
| 13107 | 1500                         | 1000  | 200   | 1494                         | 994   | 123   | 1438       | 938       | 159.0 |
| 13108 | 1800                         | 1000  | 200   | 1794                         | 994   | 123   | 1738       | 938       | 175.0 |





# OPCIEAS™

## SAFE FOR KEYS

### DÜREN 13200-13208

Class: S1 according to PN-EN 14450, Class: A according to VDMA 24992 issued May 1995.

Single-walled body with thickness 3 mm, Multi-walled door with overall thickness 57 mm with plate thickness 6 mm, Bolted 3-side locking. Rigid grasp door construction on the hinge side. The new systems of hooks are introduced, it can be placed separately in any position, it is made out of stainless steel and it can be made in various lengths like 20 mm, 30 mm and 40 mm.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Handle: folding handle, plastic, protruding 12 mm, Hinges: external protruding 20 mm, Door opens to 180°, Bolt down holes: 2pcs in bottom 2pcs in back side (Ø 11 mm), Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light | Weight kg |       |  |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-----------|-------|--|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width     | Depth |  |
| 13200 | 350                          | 350   | 200   | 344                          | 344   | 125   | 260        | 213       | 18.0  |  |
| 13201 | 550                          | 500   | 200   | 544                          | 494   | 125   | 460        | 363       | 37.0  |  |
| 13202 | 800                          | 500   | 200   | 794                          | 494   | 125   | 710        | 363       | 47.0  |  |
| 13203 | 1000                         | 600   | 200   | 994                          | 594   | 125   | 910        | 463       | 74.0  |  |
| 13204 | 1200                         | 600   | 200   | 1194                         | 594   | 125   | 1110       | 463       | 88.0  |  |
| 13205 | 1500                         | 600   | 200   | 1494                         | 594   | 125   | 1410       | 463       | 110.0 |  |
| 13206 | 1000                         | 1000  | 200   | 994                          | 994   | 125   | 910        | 820       | 131.0 |  |
| 13207 | 1500                         | 1000  | 200   | 1494                         | 994   | 125   | 1410       | 820       | 182.0 |  |
| 13208 | 1800                         | 1000  | 200   | 1794                         | 994   | 125   | 1710       | 820       | 212.0 |  |







# OPCIEAS™

## SAFE FOR KEYS

### OFFENBURG 13500-13505

Single-walled body with thickness 1,5 mm, Single walled door with thickness 3 mm with lock, straps for hooks with adjustable height special straps for long keys, it is ideal to use in the food industry, bakeries, meat stalls, dairies, groceries stores and many more such situations where it is found essential as it is made out of stainless steel it is suitable for outdoor uses too.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Door opens to 90°, Bolt down holes: 4pcs, in rear side (Ø 6 mm) Made of stainless steel.

| CODE   |       | External dimensions in mm |        |       | Internal dimensions in mm |        |       | Door light |      | Weight kg |  |
|--------|-------|---------------------------|--------|-------|---------------------------|--------|-------|------------|------|-----------|--|
| Height | Width | Depth                     | Height | Width | Depth                     | Height | Width | Depth      |      |           |  |
| 13500  | 350   | 350                       | 200    | 347   | 347                       | 174    | 287   | 261        | 9.0  |           |  |
| 13501  | 550   | 500                       | 200    | 547   | 497                       | 174    | 487   | 411        | 15.0 |           |  |
| 13502  | 800   | 500                       | 200    | 797   | 497                       | 174    | 737   | 411        | 21.0 |           |  |
| 13503  | 1000  | 600                       | 200    | 997   | 597                       | 174    | 937   | 511        | 35.0 |           |  |
| 13504  | 1200  | 600                       | 200    | 1197  | 597                       | 174    | 1137  | 511        | 41.0 |           |  |
| 13505  | 1500  | 600                       | 200    | 1497  | 597                       | 174    | 1437  | 511        | 53.0 |           |  |





# OPCIEAS™

## SAFE FOR KEYS

### HEIDELBERG 13600-13605

Single-walled body with thickness 1,5 mm, single walled door with thickness 3 mm with lock. The new systems of hooks are introduced, it can be placed separately in any position, it is made out of stainless steel and it can be made in various lengths against order like 20 mm, 30 mm and 40 mm. it is ideal to use in the food industry, bakeries, meat stalls, dairies, groceries stores and many more such situations where it is found essential as it is made out of stainless steel it is suitable for outdoor uses too.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Door opens to 90°, bolt down holes: 4 in rear side (Ø 6 mm), Made of stainless steel.

| . CODE | External dimensions in mm |       |       | Internal dimensions in mm |       |       | Door light |       | Weight kg |  |
|--------|---------------------------|-------|-------|---------------------------|-------|-------|------------|-------|-----------|--|
|        | Height                    | Width | Depth | Height                    | Width | Depth | Height     | Width | Depth     |  |
| 13600  | 350                       | 350   | 200   | 347                       | 347   | 172   | 287        | 261   | 9.0       |  |
| 13601  | 550                       | 500   | 200   | 547                       | 497   | 172   | 487        | 411   | 18.0      |  |
| 13602  | 800                       | 500   | 200   | 797                       | 497   | 172   | 737        | 411   | 29.0      |  |
| 13603  | 1000                      | 600   | 200   | 997                       | 597   | 172   | 937        | 511   | 39.0      |  |
| 13604  | 1200                      | 600   | 200   | 1197                      | 597   | 172   | 1137       | 511   | 45.0      |  |
| 13605  | 1500                      | 600   | 200   | 1497                      | 597   | 172   | 1437       | 511   | 55.0      |  |





# OPCIEAS™

## SAFE FOR KEYS

### BONN 14000-14008

Class: S2 according to PN-EN 14450, Class: B according to VDMA 24992 issued May 1995.

Multi-walled body with thickness 60 mm, multi-walled door with overall thickness 60 mm with plate thickness 6 mm, bolted with 3-side locking. Rigid grasp door construction on the hinge side, straps for hooks with height adjustable special straps for long keys.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Handle: folding handle, plastic, protruding 12 mm, Hinges: external protruding 20 mm, Door opens to 180°, bolt down holes: 2pcs in bottom 2pcs in back side (Ø 11 mm), Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light |       | Weight kg |       |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-------|-----------|-------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width | Depth     |       |
| 14000 | 450                          | 520   | 250   | 330                          | 400   | 110   | 302        | 372   | 123       | 36.0  |
| 14001 | 606                          | 520   | 250   | 486                          | 400   | 110   | 458        | 372   | 123       | 54.0  |
| 14002 | 806                          | 520   | 250   | 686                          | 400   | 110   | 658        | 372   | 123       | 72.0  |
| 14003 | 1200                         | 670   | 300   | 1080                         | 550   | 160   | 1052       | 522   | 173       | 105.0 |
| 14004 | 1500                         | 670   | 300   | 1380                         | 550   | 160   | 1352       | 522   | 173       | 130.0 |
| 14005 | 1800                         | 670   | 300   | 1680                         | 550   | 160   | 1652       | 522   | 173       | 152.0 |
| 14006 | 1200                         | 670   | 300   | 1080                         | 550   | 160   | 1052       | 522   | 173       | 300.0 |
| 14007 | 1500                         | 670   | 300   | 1380                         | 550   | 160   | 1352       | 522   | 173       | 300.0 |
| 14008 | 1800                         | 670   | 300   | 1680                         | 550   | 160   | 1652       | 522   | 173       | 300.0 |





# OPCIEAS™

## SAFE FOR KEYS

### COBURG 15000-15013

Class: S2 according to PN-EN 14450, Class: B according to VDMA 24992 issued May 1995.

Multi-walled body with thickness 60 mm, Multi-walled door with overall thickness 78 mm with plate thickness 6 mm, door with 3-sided bolted. Rigid grasp door construction on the hinge side. Sliding straps for hooks with adjustable height special straps for long keys.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 95 mm), Handle: folding handle, plastic, protruding 12 mm, Hinges: External protruding 20 mm, Door opens to 180°, bolt down holes: 2pcs in bottom 2pcs in back side (Ø 11 mm), Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light |       | Weight kg |       |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-------|-----------|-------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width | Depth     |       |
| 15000 | 600                          | 500   | 500   | 480                          | 380   | 355   | 480        | 380   | 355       | 200.0 |
| 15001 | 800                          | 500   | 500   | 680                          | 380   | 355   | 680        | 380   | 355       | 200.0 |
| 15002 | 600                          | 636   | 500   | 480                          | 516   | 355   | 480        | 516   | 355       | 300.0 |
| 15003 | 800                          | 636   | 500   | 680                          | 516   | 355   | 680        | 516   | 355       | 300.0 |
| 15004 | 1000                         | 636   | 500   | 880                          | 516   | 355   | 880        | 516   | 355       | 300.0 |
| 15005 | 1200                         | 636   | 500   | 1080                         | 516   | 355   | 1080       | 516   | 355       | 300.0 |
| 15006 | 1200                         | 636   | 500   | 1080                         | 516   | 355   | 1080       | 516   | 355       | 300.0 |
| 15007 | 1500                         | 806   | 500   | 1380                         | 686   | 355   | 1380       | 686   | 355       | 350.0 |
| 15008 | 1500                         | 806   | 500   | 1380                         | 686   | 355   | 1380       | 686   | 355       | 350.0 |
| 15009 | 1500                         | 806   | 500   | 1380                         | 686   | 355   | 1380       | 686   | 355       | 350.0 |
| 15010 | 1500                         | 806   | 500   | 1380                         | 686   | 355   | 1380       | 686   | 355       | 350.0 |
| 15011 | 1800                         | 806   | 500   | 1680                         | 686   | 355   | 1680       | 686   | 355       | 450.0 |
| 15012 | 600                          | 636   | 500   | 480                          | 516   | 355   | 480        | 516   | 355       | 300.0 |
| 15013 | 1800                         | 1200  | 500   | 1680                         | 1080  | 355   | 1680       | 1080  | 355       | 650.0 |





# OPCIEAS™

## SAFE FOR KEYS

### MÜNCHEN RIEM 16000-16010

Class: I according to EN 1143-1 European standard.

Multi-walled body with thickness 38 mm, multi-walled door with overall thickness 84 mm with plate thickness 12 mm, bolted with multi side locking and rigid grasp door construction on the hinge side, straps for hooks with adjustable height special straps for long keys.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 95 mm), Handle: plastic folding flush mount, Hinges: internal, Door opens to 90°, Bolt down holes: 2pcs. In bottom (Ø 16 mm), Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light |       | Weight kg |       |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-------|-----------|-------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width | Depth     |       |
| 16000 | 636                          | 496   | 500   | 545                          | 424   | 381   | 530        | 354   | 381       | 170.0 |
| 16001 | 836                          | 496   | 500   | 745                          | 424   | 381   | 730        | 354   | 381       | 200.0 |
| 16002 | 1036                         | 496   | 500   | 945                          | 424   | 381   | 930        | 354   | 381       | 260.0 |
| 16003 | 736                          | 736   | 500   | 645                          | 664   | 381   | 630        | 594   | 381       | 260.0 |
| 16004 | 836                          | 736   | 500   | 745                          | 664   | 381   | 730        | 594   | 381       | 275.0 |
| 16005 | 1036                         | 736   | 500   | 945                          | 664   | 381   | 930        | 594   | 381       | 325.0 |
| 16006 | 1236                         | 736   | 500   | 1145                         | 664   | 381   | 1130       | 594   | 381       | 390.0 |
| 16007 | 1536                         | 736   | 500   | 1445                         | 664   | 381   | 1430       | 594   | 381       | 475.0 |
| 16008 | 1536                         | 736   | 500   | 1445                         | 664   | 381   | 1430       | 594   | 381       | 490.0 |
| 16009 | 1836                         | 736   | 500   | 1745                         | 664   | 381   | 1730       | 594   | 381       | 630.0 |
| 16010 | 1836                         | 1200  | 500   | 1745                         | 1132  | 381   | 1730       | 1022  | 381       | 800.0 |





# OPCIEAS™

## SAFE FOR KEYS

### MAINZ (13000 - 13013)

Wall key safe

CODE 13000 - 13013

Class: S1 according to PN-EN 14450:2006, tested and certified by IMP.

• Single-walled body with thickness 3 mm, two walled door 50 mm thick, with 3-side boltwork, double bit key lock VdS – Class I / IMP – Class A with two keys.

• Bolt down holes: 4 pcs. in rear side

• Hook strips can be adjusted by height, colour and numbers.

• Цвет: RAL 7035

серый CODE

| External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light |       |       | Weight kg |
|------------------------------|-------|-------|------------------------------|-------|-------|------------|-------|-------|-----------|
| Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width | Depth |           |
| 13000                        | 436   | 460   | 120                          | 430   | 454   | 38         | 330   | 334   | 22.0      |
| 13001                        | 636   | 460   | 120                          | 630   | 454   | 38         | 530   | 334   | 34.0      |
| 13002                        | 636   | 460   | 200                          | 630   | 454   | 118        | 530   | 334   | 47.0      |
| 13003                        | 636   | 460   | 200                          | 630   | 454   | 118        | 530   | 334   | 47.5      |
| 13004                        | 636   | 460   | 300                          | 630   | 454   | 218        | 530   | 334   | 53.0      |
| 13005                        | 636   | 812   | 200                          | 630   | 806   | 118        | 530   | 664   | 75.0      |
| 13006                        | 636   | 812   | 300                          | 630   | 806   | 218        | 530   | 664   | 86.0      |
| 13007                        | 1000  | 600   | 200                          | 994   | 594   | 118        | 894   | 474   | 73.0      |
| 13008                        | 1300  | 600   | 200                          | 1294  | 594   | 118        | 1194  | 474   | 91.0      |
| 13009                        | 1600  | 600   | 200                          | 1594  | 594   | 118        | 1494  | 474   | 111.0     |
| 13010                        | 1850  | 600   | 200                          | 1844  | 594   | 118        | 1744  | 474   | 124.0     |
| 13011                        | 1300  | 1200  | 200                          | 1294  | 1194  | 118        | 1194  | 1043  | 165.0     |
| 13012                        | 1600  | 1200  | 200                          | 1594  | 1194  | 118        | 1494  | 1043  | 199.0     |
| 13013                        | 1850  | 1200  | 200                          | 1844  | 1194  | 118        | 1744  | 1043  | 228.0     |







# OPCIEAS™

## SAFE FOR KEYS

---

### DARMSTADT 15200-15204 - SAFE FOR KEYS

**Class: 0 according to PL-EN 1143-1 European Standard**

Multi-walled body with thickness 38 mm, multi-walled door with overall thickness 76 mm with plate thickness 12 mm, bolted with multi side locking and rigid grasp door construction on the hinge side. Special straps and hook for long keys, hooks and height adjustable.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 95 mm), Handle: folding handle, plastic, protruding 12 mm, Hinges: External protruding 20 mm, Door opens to 180°, Bolt down holes: 1 piece in the bottom 4pcs. In rear side (∅ 16 mm), Colour: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light | Weight kg |       |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-----------|-------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width     | Depth |
| 15200 | 436                          | 496   | 300   | 345                          | 420   | 177   | 324        | 384       | 74.0  |
| 15201 | 636                          | 496   | 300   | 545                          | 420   | 177   | 524        | 384       | 99.0  |
| 15202 | 836                          | 496   | 300   | 745                          | 420   | 177   | 724        | 384       | 123.0 |
| 15203 | 1036                         | 496   | 300   | 945                          | 420   | 177   | 924        | 384       | 147.0 |
| 15204 | 1236                         | 496   | 300   | 1145                         | 420   | 177   | 1124       | 384       | 172.0 |





# OPCIEAS™

## SAFE FOR KEYS

### MÜNCHEN-SENDLING 15500-15505 - SAFE FOR KEYS

**Class: I according to PN-EN 1143-1 European standard**

Multi-walled body with thickness 38 mm, multi-walled door with overall thickness 84 mm with plate thickness 12 mm, bolted with multi side locking and rigid grasp door construction on the hinge side. Straps for hooks with height adjustable, Special straps for long keys the new system of hooks! The hook can be placed separately in any position. Hooks are made of stainless steel. Hooks can be made with various lengths upon request 20 mm, 30 mm and 40 mm.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 95 mm), handle: plastic folding flush mount, hinges: internal, door opens to 90°, bolt down holes: 2 pieces in the bottom 1 piece in the back side (Ø 16 mm) Color: RAL 7035 light grey.

| CODE  | External dimensions in mm |       |       | Internal dimensions in mm |       |       | Door light |       | Weight kg |        |       |       |
|-------|---------------------------|-------|-------|---------------------------|-------|-------|------------|-------|-----------|--------|-------|-------|
|       | Height                    | Width | Depth | Height                    | Width | Depth | Height     | Width | Depth     | Height | Width | Depth |
| 15500 | 436                       | 496   | 250   | 345                       | 394   | 106   | 330        | 339   | 131       | 90.0   |       |       |
| 15501 | 636                       | 496   | 250   | 545                       | 394   | 106   | 530        | 339   | 131       | 115.0  |       |       |
| 15502 | 836                       | 496   | 300   | 745                       | 394   | 156   | 730        | 339   | 181       | 170.0  |       |       |
| 15503 | 1036                      | 496   | 300   | 945                       | 394   | 156   | 930        | 339   | 181       | 200.0  |       |       |
| 15504 | 1536                      | 736   | 300   | 1445                      | 634   | 156   | 1430       | 579   | 181       | 355.0  |       |       |
| 15505 | 1836                      | 736   | 300   | 1745                      | 634   | 156   | 1730       | 579   | 181       | 402.0  |       |       |





# OPCIEAS™

## SAFE FOR KEYS

---

### DÜSSELDORF-METTMANN-RATINGEN 16100-16117 - Fireproof - SAFE FOR KEYS

Fireproof class: LFS 30 P according to EN 15659, class: S2 according to PN-EN 14450

Class: B according to VDMA 24992 issued May 1995.

Multi-walled body with thickness 65,5 mm, multi-walled door with overall thickness 94 mm with plate thickness 43 mm, bolted with 3-sided locking. Rigid grasp door construction on the hinge side. Provided Straps for hooks with adjustable height, special straps for long keys. Safe walls filled with special low thermal conductivity concrete. Doors are provided with special thermo active gaskets that increase in volume and seal the doors isolating insides from high temperature.

**Standard option:** Double bit key lock VdS class 1 with two keys (key length: 65 mm), Handle: metal, protruding 60 mm, Hinges: external, Door opens 180°, bolt down holes: 2 pieces in the bottom (Ø 16 mm) , Color: RAL 7035 light grey.

| CODE  | External dimensions in mm |       |       | Internal dimensions in mm |       |       | Door light |       |       | Weight kg |
|-------|---------------------------|-------|-------|---------------------------|-------|-------|------------|-------|-------|-----------|
|       | Height                    | Width | Depth | Height                    | Width | Depth | Height     | Width | Depth |           |
| 16100 | 1006                      | 836   | 700   | 860                       | 705   | 523   | 860        | 665   | 540   | 258.0     |
| 16101 | 1006                      | 836   | 700   | 860                       | 705   | 523   | 860        | 665   | 540   | 247.0     |
| 16102 | 1006                      | 836   | 700   | 860                       | 705   | 523   | 860        | 665   | 540   | 226.0     |
| 16103 | 1256                      | 836   | 700   | 1110                      | 705   | 523   | 1110       | 665   | 540   | 305.0     |
| 16104 | 1256                      | 836   | 700   | 1110                      | 705   | 523   | 1110       | 665   | 540   | 290.0     |
| 16105 | 1256                      | 836   | 700   | 1110                      | 705   | 523   | 1110       | 665   | 540   | 262.0     |
| 16106 | 1506                      | 836   | 700   | 1360                      | 705   | 523   | 1360       | 665   | 540   | 362.0     |
| 16107 | 1506                      | 836   | 700   | 1360                      | 705   | 523   | 1360       | 665   | 540   | 342.0     |
| 16108 | 1506                      | 836   | 700   | 1360                      | 705   | 523   | 1360       | 665   | 540   | 307.0     |
| 16109 | 1806                      | 836   | 700   | 1660                      | 705   | 523   | 1660       | 665   | 540   | 423.0     |
| 16110 | 1806                      | 836   | 700   | 1660                      | 705   | 523   | 1660       | 665   | 540   | 399.0     |
| 16111 | 1806                      | 836   | 700   | 1660                      | 705   | 523   | 1660       | 665   | 540   | 358.0     |
| 16112 | 1806                      | 1200  | 700   | 1660                      | 1069  | 523   | 1660       | 1029  | 540   | 584.0     |
| 16113 | 1806                      | 1200  | 700   | 1660                      | 1069  | 523   | 1660       | 1029  | 540   | 534.0     |
| 16114 | 1806                      | 1200  | 700   | 1660                      | 1069  | 523   | 1660       | 1029  | 540   | 507.0     |
| 16115 | 606                       | 636   | 400   | 460                       | 505   | 223   | 460        | 465   | 240   | 86.0      |
| 16116 | 906                       | 636   | 400   | 760                       | 505   | 223   | 760        | 465   | 240   | 112.0     |
| 16117 | 1206                      | 636   | 400   | 1060                      | 505   | 223   | 1060       | 465   | 240   | 148.0     |





# OPCIEAS™

## SAFE FOR KEYS

### DRESDEN-COSWIG 16200-16217- Fireproof - SAFE FOR KEYS

Fireproof class: LFS 30 P , Class: I according to EN 1143-1 European standard

Multi-walled body with thickness 62 mm, Multi-walled door with overall thickness 104 mm with plate thickness 42 mm, bolted with 3-sided locking. Rigid grasp door construction on the hinge side. Sliding straps for hooks with adjustable height, special straps for long keys.

**Standard option:** Lock: VdS class 1 with two keys (120 mm length), handle: metal, protruding 60 mm, hinges: external, door opens to 180°, bolt down holes: 1 piece in the bottom, 1 piece in the back side (Ø 16 mm), Color: RAL 7035 light grey.

| CODE  | External dimensions<br>in mm |       |       | Internal dimensions<br>in mm |       |       | Door light |       | Weight kg |       |
|-------|------------------------------|-------|-------|------------------------------|-------|-------|------------|-------|-----------|-------|
|       | Height                       | Width | Depth | Height                       | Width | Depth | Height     | Width | Depth     |       |
| 16200 | 1006                         | 836   | 700   | 867                          | 712   | 528   | 852        | 682   | 528       | 355.0 |
| 16201 | 1006                         | 836   | 700   | 867                          | 712   | 528   | 852        | 682   | 528       | 343.0 |
| 16202 | 1006                         | 836   | 700   | 867                          | 712   | 528   | 852        | 682   | 528       | 321.0 |
| 16203 | 1256                         | 836   | 700   | 1117                         | 712   | 528   | 1102       | 682   | 528       | 425.0 |
| 16204 | 1256                         | 836   | 700   | 1117                         | 712   | 528   | 1102       | 682   | 528       | 406.0 |
| 16205 | 1256                         | 836   | 700   | 1117                         | 712   | 528   | 1102       | 682   | 528       | 376.0 |
| 16206 | 1506                         | 836   | 700   | 1367                         | 712   | 528   | 1352       | 682   | 528       | 493.0 |
| 16207 | 1506                         | 836   | 700   | 1367                         | 712   | 528   | 1352       | 682   | 528       | 473.0 |
| 16208 | 1506                         | 836   | 700   | 1367                         | 712   | 528   | 1352       | 682   | 528       | 439.0 |
| 16209 | 1806                         | 836   | 700   | 1667                         | 712   | 528   | 1652       | 682   | 528       | 572.0 |
| 16210 | 1806                         | 836   | 700   | 1667                         | 712   | 528   | 1652       | 682   | 528       | 551.0 |
| 16211 | 1806                         | 836   | 700   | 1667                         | 712   | 528   | 1652       | 682   | 528       | 506.0 |
| 16212 | 1806                         | 1200  | 700   | 1615                         | 1076  | 506   | 1615       | 1046  | 528       | 812.0 |
| 16213 | 1806                         | 1200  | 700   | 1615                         | 1076  | 506   | 1615       | 1046  | 528       | 756.0 |
| 16214 | 1806                         | 1200  | 700   | 1615                         | 1076  | 506   | 1615       | 1046  | 528       | 728.0 |
| 16215 | 606                          | 636   | 400   | 467                          | 512   | 215   | 452        | 482   | 228       | 110.0 |
| 16216 | 906                          | 636   | 400   | 767                          | 512   | 215   | 752        | 482   | 228       | 150.0 |
| 16217 | 1206                         | 636   | 400   | 1067                         | 512   | 215   | 1052       | 482   | 228       | 210.0 |





# OPCIEAS™

## SAFE FOR KEYS

### PARIS-ST. GERMAIN 16300-16317 - SAFE FOR KEYS.

Fireproof key safe, Fireproof class: LFS 30 P, Class: II according to EN 1143-1 European standard  
Multi-walled body with thickness 52mm, multi-walled door with overall thickness 109 mm with plate thickness 49mm, bolted with 3-sided locking. Rigid grasp door construction on the hinge side. Safe walls filled with special low thermal conductivity concrete. Doors provided with special thermo active gaskets that increase in volume and seal the doors isolating insides from high temperature. Sliding straps for hooks with adjustable height, special straps for long keys.

**Standard option:** Lock: VdS class 1 with two keys (145 mm length), handle: metal, protruding 60 mm, hinges: external, door opens to 180°, bolt down holes: 1 piece in the bottom, 1 piece in the back side (Ø 16 mm), Color: RAL 7035 light grey.

| CODE   |       | External dimensions in mm |        | Internal dimensions in mm |       | Door light |       |       | Weight kg |        |
|--------|-------|---------------------------|--------|---------------------------|-------|------------|-------|-------|-----------|--------|
| Height | Width | Depth                     | Height | Width                     | Depth | Height     | Width | Depth |           |        |
| 16300  | 1006  | 836                       | 700    | 887                       | 732   | 532        | 872   | 702   | 532       | 790.0  |
| 16301  | 1006  | 836                       | 700    | 887                       | 732   | 532        | 872   | 702   | 532       | 770.0  |
| 16302  | 1006  | 836                       | 700    | 887                       | 732   | 532        | 872   | 702   | 532       | 750.0  |
| 16303  | 1256  | 836                       | 700    | 1137                      | 732   | 532        | 1122  | 702   | 532       | 920.0  |
| 16304  | 1256  | 836                       | 700    | 1137                      | 732   | 532        | 1122  | 702   | 532       | 900.0  |
| 16305  | 1256  | 836                       | 700    | 1137                      | 732   | 532        | 1122  | 702   | 532       | 850.0  |
| 16306  | 1506  | 836                       | 700    | 1387                      | 732   | 532        | 1372  | 702   | 532       | 1030.0 |
| 16307  | 1506  | 836                       | 700    | 1387                      | 732   | 532        | 1372  | 702   | 532       | 1000.0 |
| 16308  | 1506  | 836                       | 700    | 1387                      | 732   | 532        | 1372  | 702   | 532       | 960.0  |
| 16309  | 1806  | 836                       | 700    | 1687                      | 732   | 532        | 1672  | 702   | 532       | 1110.0 |
| 16310  | 1806  | 836                       | 700    | 1687                      | 732   | 532        | 1672  | 702   | 532       | 1070.0 |
| 16311  | 1806  | 836                       | 700    | 1687                      | 732   | 532        | 1672  | 702   | 532       | 1020.0 |
| 16312  | 1806  | 1200                      | 700    | 1668                      | 1096  | 510        | 1634  | 1066  | 532       | 1621.0 |
| 16313  | 1806  | 1200                      | 700    | 1668                      | 1096  | 510        | 1634  | 1066  | 532       | 1571.0 |
| 16314  | 1806  | 1200                      | 700    | 1668                      | 1096  | 510        | 1634  | 1066  | 532       | 1543.0 |
| 16315  | 606   | 636                       | 400    | 487                       | 532   | 219        | 472   | 502   | 232       | 330.0  |
| 16316  | 906   | 636                       | 400    | 787                       | 532   | 219        | 772   | 502   | 232       | 420.0  |
| 16317  | 1206  | 636                       | 400    | 1087                      | 532   | 219        | 1072  | 502   | 232       | 470.0  |







# OPCIEAS™

## SAFE FOR KEYS

### ROM-KOLOSEUM 16400-16417 - Fireproof - SAFE FOR KEYS

Fireproof class: LFS 30 P Class: III according to EN 1143-1 European standard

Multi-walled body with thickness 60 mm, Multi-walled door with overall thickness 130 mm with plate thickness 70 mm, Bolted with 3-sided locking. Rigid grasp door construction on the hinge side. Safe walls filled with special low thermal conductivity concrete. Doors provided with special thermo active gaskets that increase in volume and seal the doors isolating insides from high temperature. Sliding straps for hooks with adjustable height, special straps for long keys.

**Standard option:** Lock: VdS class 2 with 2 keys (164 mm length), Handle: metal, protruding 60 mm, Hinges: external, Door opens to 180°, Bolt down holes: 1 piece in the bottom, 1 piece in the back side (Ø 16 mm), Colour: RAL 7035 light grey.

| CODE  | External dimensions in mm |       |       | Internal dimensions in mm |       |       | Door light |       |       | Weight kg |
|-------|---------------------------|-------|-------|---------------------------|-------|-------|------------|-------|-------|-----------|
|       | Height                    | Width | Depth | Height                    | Width | Depth | Height     | Width | Depth |           |
| 16400 | 1006                      | 836   | 700   | 856                       | 716   | 494   | 856        | 686   | 494   | 920.0     |
| 16401 | 1006                      | 836   | 700   | 856                       | 716   | 494   | 856        | 686   | 494   | 900.0     |
| 16402 | 1006                      | 836   | 700   | 856                       | 716   | 494   | 856        | 686   | 494   | 880.0     |
| 16403 | 1256                      | 836   | 700   | 1106                      | 716   | 494   | 1106       | 686   | 494   | 1190.0    |
| 16404 | 1256                      | 836   | 700   | 1106                      | 716   | 494   | 1106       | 686   | 494   | 1170.0    |
| 16405 | 1256                      | 836   | 700   | 1106                      | 716   | 494   | 1106       | 686   | 494   | 1120.0    |
| 16406 | 1506                      | 836   | 700   | 1356                      | 716   | 494   | 1356       | 686   | 494   | 1320.0    |
| 16407 | 1506                      | 836   | 700   | 1356                      | 716   | 494   | 1356       | 686   | 494   | 1290.0    |
| 16408 | 1506                      | 836   | 700   | 1356                      | 716   | 494   | 1356       | 686   | 494   | 1250.0    |
| 16409 | 1806                      | 836   | 700   | 1656                      | 716   | 494   | 1656       | 686   | 494   | 1490.0    |
| 16410 | 1806                      | 836   | 700   | 1656                      | 716   | 494   | 1656       | 686   | 494   | 1450.0    |
| 16411 | 1806                      | 836   | 700   | 1656                      | 716   | 494   | 1656       | 686   | 494   | 1400.0    |
| 16412 | 1806                      | 1200  | 700   | 1652                      | 1080  | 472   | 1618       | 1050  | 494   | 1990.0    |
| 16413 | 1806                      | 1200  | 700   | 1652                      | 1080  | 472   | 1618       | 1050  | 494   | 1900.0    |
| 16414 | 1806                      | 1200  | 700   | 1652                      | 1080  | 472   | 1618       | 1050  | 494   | 1860.0    |
| 16415 | 606                       | 636   | 400   | 456                       | 516   | 181   | 456        | 486   | 194   | 340.0     |
| 16416 | 906                       | 636   | 400   | 756                       | 516   | 181   | 756        | 486   | 194   | 480.0     |
| 16417 | 1206                      | 636   | 400   | 1056                      | 516   | 181   | 1056       | 486   | 194   | 640.0     |

