



OPCIEAS™

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES

AUE 17000-17005 Wall safe (light body)

Single-walled body with thickness 3 mm • Overall door thickness 35 mm • Door opens to 90° • Double bit key lock VDS class I with two keys. • Color: RAL 7035 light grey.

CODE			External dimensions in mm			Internal dimensions in mm			Door light		Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	
17000	110	240	110	88	223	72	88	165	72	72	4.0	
17001	157	240	110	135	223	72	135	165	72	72	5.0	
17002	230	240	110	208	223	72	208	165	72	72	7.5	
17003	300	240	110	278	223	72	278	165	72	72	9.0	
17004	230	240	200	208	223	162	208	165	162	162	10.0	
17005	300	240	200	278	223	162	278	165	162	162	12.5	





OPCIEASTM

SAFE FOR HOTEL ROOMS/PERSONAL/DOMESTIC USES

WITTEN 20000-20007 Wall safe, compact body

Security class S2 certified by IMP according to standard PN-EN 14450:2006

Single sided body, overall door thickness 52 mm with plate thickness 6 mm. door opens 90°, double bit key lock VDS class I with two keys, Standard handle protruding 60mm, can be flush mount on request, Color: RAL 7035 light grey.

CODE	External dimensions in mm			Internal dimensions in mm			Door light		Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Depth
20000	166	300	200	100	234	156	76	180	156	6.0
20001	266	300	200	200	234	135	176	159	135	10.5
20002	426	420	200	360	342	135	336	279	135	20.0
20003	426	420	360	360	342	295	336	279	295	26.0
20004	600	420	360	534	342	295	510	279	295	33.0
20005	600	600	360	534	522	295	510	459	295	48.0
20006	800	420	360	734	342	295	710	279	295	55.0
20007	800	800	360	734	722	295	710	659	295	72.0





OPCIEAS™

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES

FRANKFURT 30000-30027 Wall safe

Class: I certified by IMP according to PN-EN 1143-1, Class: I certified by VdS according to EN 1143-1.

Single sided body, Multi walled door 84 mm with plate thickness 12 mm, with multi side bolted, Door opens to 90°, Hinges: internal, Double bit key lock VDS class I with two keys,

Standard option: the handle and keyboard are flush mounted in door, when the external height is more than 530 mm and a depth is 387mm, there is an option to install additional internal safe 190 mm height. Color: RAL 7035 light grey.

CODE			External dimensions in mm			Internal dimensions in mm			Door light			Weight kg		
Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Width	Depth
30000	330	390	217	245	312	121	230	252	121	34.0				
30001	330	390	267	245	312	171	230	252	171	36.0				
30002	330	490	217	245	412	121	230	352	121	42.0				
30003	330	490	267	245	412	171	230	352	171	44.0				
30004	330	490	387	245	412	291	230	352	291	50.0				
30005	430	490	217	345	412	121	330	352	121	55.0				
30006	430	490	267	345	412	171	330	352	171	57.0				
30007	430	490	387	345	412	291	330	352	291	60.0				
30008	530	490	217	445	412	121	430	352	121	63.0				
30009	530	490	267	445	412	171	430	352	171	65.0				
30010	530	490	387	445	412	291	430	352	291	69.0				
30011	630	490	267	545	412	171	530	352	171	75.0				
30012	630	490	307	545	412	211	530	352	211	77.0				
30013	630	490	387	545	412	291	530	352	291	81.0				
30014	730	490	307	645	412	211	630	352	211	86.0				
30015	730	490	387	645	412	291	630	352	291	90.0				
30016	830	490	307	745	412	211	730	352	211	95.0				
30017	830	490	387	745	412	291	730	352	291	100.0				
30018	1030	490	387	945	412	291	930	352	291	119.0				
30019	1030	490	507	945	412	411	930	352	411	126.0				
30020	1230	490	387	1145	412	291	1130	352	291	138.0				
30021	1230	490	507	1145	412	411	1130	352	411	146.0				
30022	700	700	507	615	622	411	600	562	411	124.0				
30023	800	700	507	715	622	411	700	562	411	137.0				
30024	1000	700	507	915	622	411	900	562	411	164.0				
30025	1200	700	507	1115	622	411	1100	562	411	190.0				
30026	1500	700	507	1415	622	411	1400	562	411	233.0				
30027	1800	700	507	1715	622	411	1700	562	411	273.0				



OPCIEASTM

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES





OPCIEASTM

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES


JENA 18000-18003 Wall safe

Class: B according to VDMA 24992 from May 1995.

Single sided body, Walls thickness: 3 mm, multi-walled door with overall thickness 35 mm with plate thickness 6 mm, Rigid grasp door construction on the hinge side.

Standard option: Double bit key lock VdS class 1 with two keys (key length: 65 mm), Door opens to 90°, Color: RAL 7035 light grey

CODE		External dimensions			Internal dimensions			Door light		Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Height	Width	Depth	
18000	116	246	170	110	240	132	94	168	132	7.0	
18001	163	246	170	157	240	132	141	168	132	8.0	
18002	236	246	170	230	240	132	214	168	132	10.0	
18003	306	246	170	300	240	132	284	168	132	14.0	

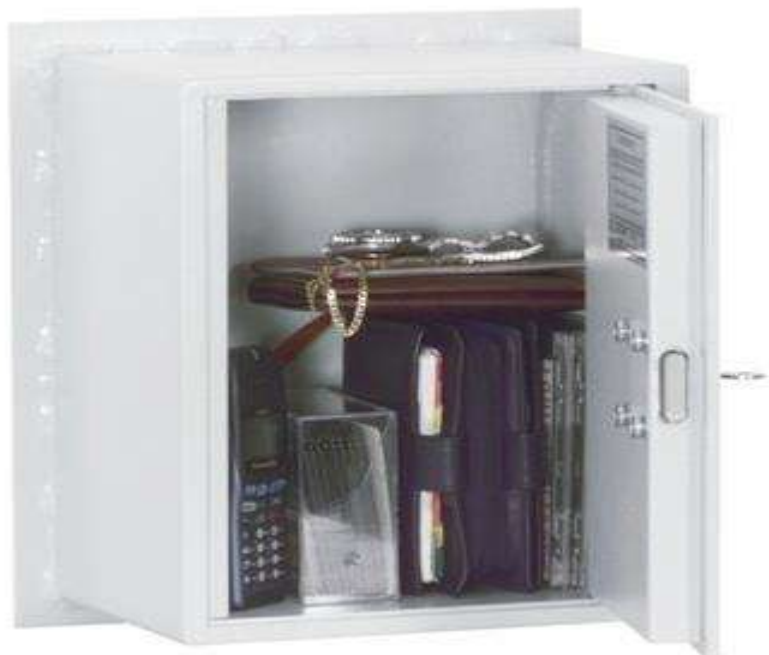



OPCIEAS™

SAFE FOR HOTEL ROOMS/PERSONAL/DOMESTIC USES

WÜRZBURG 19000-19007 Wall safe

Class: S2 according to PN-EN 14450, Class: B according to VDMA 24992 issued May 1995.

Single-walled body with thickness 1.5 mm, Bolted with 3-side locking. Rigid grasp door construction on the hinge side.

Standard option: Double bit key lock VdS class 1 with two keys (key length: 65 mm), Handle: folding handle, plastic protruding 12 mm, Hinges: internal, Door opens to 90°, Color: RAL 7035 light grey.

CODE		External dimensions in mm			Internal dimensions in mm			Door light		Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Width	Depth
19000	300	420	355	226	348	294	212	319	294	149	18.0
19001	300	420	210	226	348	149	212	319	149	149	15.0
19002	420	300	355	346	228	294	332	199	294	149	18.0
19003	420	300	210	346	228	149	332	199	149	149	15.0
19004	600	420	355	526	348	294	512	319	294	149	29.0
19005	600	420	210	526	348	149	512	319	149	149	25.0
19006	800	420	355	726	348	294	712	319	294	149	37.0
19007	800	420	210	726	348	149	712	319	149	149	32.0





OPCIEASTM

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES

HAMM 21000-21003 Wall safe

Class: B according to VDMA 24992 from May 1995.

Single-walled body with thickness 1.5mm, multi-walled door with overall thickness 45mm with plate thickness 6 mm is designed for mounting in wall.

Standard option: Lock: Double bit key lock VdS class 1 with two keys (key length: 65 mm) Door opens to 90°, Color: RAL 7035 light grey

CODE		External dimensions in mm			Internal dimensions in mm			Door light		Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Height	Width	Depth	
21000	190	300	160	130	243	109	130	219	109	11.0	
21001	230	300	160	170	243	109	170	219	109	13.0	
21002	280	300	160	220	243	109	220	219	109	15.0	
21003	280	300	260	220	243	209	220	219	209	16.0	





OPCIEASTM

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES

DUISBURG 22000-22004 Wall safe

Class: S2 according to PN-EN 14450, Class: B according to VDMA 24992 issued May 1995.

Single-walled body with thickness 1.5 mm, multi-walled door with overall thickness 60 mm with plate thickness 6 mm, Bolted 3-sides, rigid grasp door construction on the hinge side, multi-walled body available on request.

Standard option: Double bit key lock VdS class 1 with two keys (key length: 65 mm), Handle: folding handle, plastic, protruding 12 mm, Hinges: internal, Door opens to 90°, Color: RAL 7035 light grey.

CODE		External dimensions in mm			Internal dimensions in mm			Door light			Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	
22000	430	350	370	327	259	302	327	227	302	20.0		
22001	325	455	370	222	364	302	222	335	302	20.0		
22002	430	455	370	327	364	302	327	335	302	40.0		
22003	630	455	370	527	364	302	527	335	302	50.0		
22004	830	455	370	727	364	302	727	335	302	60.0		





OPCIEAS™

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES

ESSEN 23000-23004 Wall safe

Class: S2 according to PN-EN 14450, Class: B according to VDMA 24992 issued May 1995.

Single-walled body with thickness 2 mm, multi-walled door with overall thickness 84 mm with plate thickness 12 mm, Bolted 3-sides, rigid grasp door construction on the hinge side, multi-walled body available on request.

Standard option: Double bit key lock VdS class 1 with two keys (key length: 95 mm), Handle: plastic folding flush mount, Hinges: internal, Door opens to 90°, Color: RAL 7035 light grey.

CODE			External dimensions in mm			Internal dimensions in mm			Door light		Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height
23000	330	390	385	274	318	293	237	256	293	25.0		
23001	330	490	385	274	418	293	237	356	293	35.0		
23002	430	490	385	374	418	293	337	356	293	48.0		
23003	630	490	385	574	418	293	537	356	293	59.0		
23004	830	490	385	774	418	293	737	356	293	80.0		





OPCIEASTM

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES

UNNA (31000-31101) Wall, ceiling or floor safe light body

Tube safe with 1 aluminum twist-off can for cash (diameter: 45 mm) Locked with semi-cylindrical lock (three keys included as a standard) The structure enables perfect protection of cash or valuables; it can be easily covered or concealed.
Square dimension at the basis - 80 mm, Color: RAL 7035 grey.

CODE	External dimensions in mm			Weight kg
Height	Width	Width	Depth	
31000	161	63	63	2.0
31001	241	63	63	2.5
31002	331	63	63	3.0





OPCIEASTM

SAFE FOR HOTEL ROOMS/PERSOANAL/DOMESTIC USES

**HERNE (31100-31101) Floor mounted safe, extremely stable construction.
Class S2 acc. to IMP and PN-EN 14450:2006.**

Single-walled body, 80 mm thick double-walled door including a 12 mm surface plate limits protection from fire, Easy opening and closing facilitated by a gas cylinder, also prevents from autogenously opening and closing of door. Door opens to 90°, Locked with key lock VdS - Class I/IMP-Class A (two keys are included as a standard). The safe can be outfitted with mechanical key-code lock or electronic lock (in addition) Color: RAL 7035 - light-grey.

CODE		External dimensions in mm			Internal dimensions in mm			Door light		Weight kg	
Height	Width	Depth	Height	Width	Depth	Height	Width	Depth	Height	Width	Depth
31100	330	440	540	320	430	345	230	302	345	35.0	
31101	330	490	540	320	480	345	230	302	345	40.0	

