



# COMPANY INTRODUCTION



---

**ANVEARYA ENGINEERING PRODUCTS LLP**  
**Milkat No.849, Kamathe Patil Sadan Kondhwa**  
**Budruk, Pisoli Road**  
**Pune-411048**

# INTRODUCTION

Welcome to Anvearya Engineering Products, your premier destination for top-quality engineering equipment and solutions. Founded on a commitment to excellence and innovation, we have established ourselves as a trusted partner for industries ranging from Wind Energy to Utilities. Our extensive product range is designed to meet the diverse needs of our clients, ensuring they have access to the most advanced and reliable equipment in the market.



At Anvearya Engineering Products, we pride ourselves on our ability to deliver tailored solutions that drive efficiency and performance. Our team of experienced professionals works closely with each client to understand their unique requirements and provide equipment that meets the highest standards of quality and safety. Whether you are looking for cutting-edge technology for railway infrastructure or robust equipment for utility services, we have the expertise and inventory to support your operations.

Our commitment to customer satisfaction goes beyond just providing exceptional products. We offer comprehensive support and service, ensuring that our clients receive the assistance they need to maximize the value of their investments. From initial consultation to after-sales service, Anvearya Engineering Products is dedicated to fostering long-term partnerships and contributing to the success of the industries we serve. Thank you for choosing us as your engineering equipment provider.

## OUR MISSION

Our mission is to deliver exceptional engineering equipment tailored to the unique needs of our clients. We achieve this through relentless innovation, uncompromising quality standards, and superior customer service. By fostering partnerships based on trust and mutual success, we aim to empower industries and contribute to their longterm growth.

## OUR VISION

To become the foremost provider of innovative engineering solutions, driving industrial advancement through state-of-the-art equipment that enhances operational efficiency and sustainability.

# TARGET AUDIENCE



**Industrial  
Manufacturers**



**Construction and  
Infrastructure Companies**



**Utilities and  
Energy Sector**



**Mining and  
Extraction Industries**



**Transportation and  
Logistics Providers**



**Research and  
Development Facilities**



**Government Agencies**



**Maintenance and  
Service Providers**



**Emerging Businesses  
and Startups**



**Global Export Markets**



## STRAIGHT CABLE

## Cable Laying Products



### Features & Specification

Name : Triple Corner Cable Roller

Material : Heavy duty steel construction

Rollers : 3 x 110mm diameter large waisted steel rollers

Bearing Type : Sealed roller bearing fitted

Finish : Zinc plated

Mount Type : Universal link pin mount positions

Weight : 8.5Kg

Dimensions (L x W x H) : 410mm x 320mm x 295mm Cable

Capacity : Up to 155mm

Carrying Load : 300Kg



### Features & Specification

Name : Straight Cable Roller

Material : Heavy duty steel construction

Rollers : 110mm diameter large waisted steel rollers

Bearing Type : Sealed roller bearing fitted

Finish : : Bright zinc plated

Mount Type : Universal link pin mount positions

Weight : 3.8Kg

Dimensions (L x W x H) : 30cm x 22.5cm x 22.5cm Cable

Capacity : 130mm diameter

### Purpose & Build:

Straight Cable Roller Stands are engineered for guiding cables during installations. Constructed from zinc-plated steel, they ensure durability and smooth cable movement, minimizing damage.

### Uses:

Trenches: Essential for underground cable laying. Ducts: Facilitates cable installations in ducts. Power: Integral to power installation projects. Telecom: Used in telecom infrastructure. Utilities: Employed by utility companies for cable laying.

### Key Features:

Variety: Available in different configurations for specific needs. Bearings: Equipped with sealed ball-bear-ings for seamless operation. Portability: Lightweight design for easy handling. Capacity: Can accommodate cables up to a certain size (e.g., 125mm)



## SINGLE EYE CABLE PULLING GRIPS



### SINGLE EYE CABLE PULLING GRIPS

Part No	Cable Diameter in mm	Material	Weave	Working Load Limit in Kg	Grip Length in mm	Total Length in mm
AEP 11/1	06 – 11	Galvanized	Double	200	500	600
AEP 16/1	11 – 16	Galvanized	Double	300	500	600
AEP 21/1	16 – 21	Galvanized	Double	650	500	600
AEP 26/1	21 – 26	Galvanized	Double	670	500	600
AEP 31/1	26 – 31	Galvanized	Double	800	1000	1100
AEP 41/1	31 – 41	Galvanized	Double	1000	1000	1100
AEP 51/1	41 – 51	Galvanized	Double	1500	1000	1100
AEP 61/1	51 – 61	Galvanized	Double	1600	1400	1500
AEP 71/1	61 – 71	Galvanized	Double	2000	1400	1500
AEP 81/1	71 – 81	Galvanized	Double	2800	1400	1500
AEP 101/1	81 – 101	Galvanized	Double	3500	1400	1500
AEP 121/1	101 -121	Galvanized	Double	3550	1400	1500
AEP 151/1	121 – 151	Galvanized	Double	4200	1400	1500

## DOUBLE EYE CABLE PULLING GRIPS



### DOUBLE EYE CABLE PULLING GRIPS

Part No	Cable Diameter in mm	Material	Weave	Working Load Limit in Kg	Grip Length in mm	Total Length in mm
AEP 11/2	06 – 11	Galvanized	Double	200	500	700
AEP 16/2	11 – 16	Galvanized	Double	300	500	700
AEP 21/2	16 – 21	Galvanized	Double	650	500	700
AEP 26/2	21 – 26	Galvanized	Double	670	500	700
AEP 31/2	26 – 31	Galvanized	Double	800	1000	1200
AEP 41/2	31 – 41	Galvanized	Double	1000	1000	1200
AEP 51/2	41 – 51	Galvanized	Double	1500	1000	1200
AEP 61/2	51 – 61	Galvanized	Double	1600	1400	1600
AEP 71/2	61 – 71	Galvanized	Double	2000	1400	1600
AEP 81/2	71 – 81	Galvanized	Double	2800	1400	1600
AEP 101/2	81 – 101	Galvanized	Double	3500	1400	1600
AEP 121/2	101 -121	Galvanized	Double	3550	1400	1700
AEP 151/2	121 – 151	Galvanized	Double	4200	1400	1700

## SINGLE EYE SUPPORT GRIPS



### SINGLE EYE CABLE SUPPORT GRIPS

Part No	Cable Diameter in mm	Material	Weave	Working Load Limit in Kg	Grip Length in mm	Total Length in mm
AEP12/SUP	09 – 12	Stainless Steel	Single	125	200	400
AEP15/SUP	12 – 15	Stainless Steel	Single	200	250	450
AEP19/SUP	15 – 19	Stainless Steel	Single	250	300	500
AEP25/SUP	19 – 25	Stainless Steel	Single	250	350	550
AEP30/SUP	25 – 30	Stainless Steel	Single	400	400	650
AEP40/SUP	30 – 40	Stainless Steel	Single	800	450	700
AEP50/SUP	40 – 50	Stainless Steel	Double	800	550	900
AEP60/SUP	50 – 60	Stainless Steel	Double	800	600	950
AEP70/SUP	60 – 70	Stainless Steel	Double	1000	600	950
AEP80/SUP	70 – 80	Stainless Steel	Double	1400	650	1000
AEP100/SUP	80 – 100	Stainless Steel	Double	1700	700	1200

## DOUBLE EYE CABLE SUPPORT GRIPS



### DOUBLE EYE CABLE SUPPORT GRIPS

Part No	Cable Diameter in mm	Material	Weave	Working Load Limit in Kg	Grip Length in mm	Total Length in mm
AEP12/2SUP	09 – 12	Stainless Steel	Single	125	200	400
AEP15/2SUP	12 – 15	Stainless Steel	Single	200	250	450
AEP19/2SUP	15 – 19	Stainless Steel	Single	250	300	500
AEP25/2SUP	19 – 25	Stainless Steel	Single	250	350	550
AEP30/2SUP	25 – 30	Stainless Steel	Single	400	400	650
AEP40/2SUP	30 – 40	Stainless Steel	Single	800	450	700
AEP50/2SUP	40 – 50	Stainless Steel	Double	800	550	900
AEP60/2SUP	50 – 60	Stainless Steel	Double	800	600	950
AEP70/2SUP	60 – 70	Stainless Steel	Double	1000	600	950
AEP80/2SUP	70 – 80	Stainless Steel	Double	1400	650	1000
AEP100/2SUP	80 – 100	Stainless Steel	Double	1700	700	1200



# SINGLE AND DOUBLE END CONDUCTORE SOCKS



## SINGLE AND DOUBLE END CONDUCTORE SOCKS

Part No	Cable Diameter (mm)	Material	Weave	Working Load Limit (Kg)	Grip Length (mm)	Total Length (mm)
AEP17/SE	08 - 17	Galvanized	2/3/4	2000	1200	1500
AEP29/SE	17 - 29	Galvanized	2/3/4	2800	1200	1500
AEP38/SE	29 - 38	Galvanized	2/3/4/5	3700	1500	1800
AEP50/SE	38 - 50	Galvanized	2/3/4/5	5300	1700	2000
AEP17/DE	08 - 17	Galvanized	2/3/4	2000	2400	3000
AEP29/DE	17 - 29	Galvanized	2/3/4	2800	2400	3000
AEP38/DE	29 - 38	Galvanized	2/3/4/5	3700	3000	3600
AEP50/DE	38 - 50	Galvanized	2/3/4/5	5300	3400	4000


## WHIP SOCKS



### WHIP SOCKS

Part No	Cable Diameter (mm)	Material	Weave	Working Load Limit (Kg)	Grip Length (mm)	Total Length (mm)
AEPW10/2	06 - 10	Galvanized / SS	Double	500	600	740
AEPW15/2	10 - 15	Galvanized / SS	Double	650	600	740
AEPW20/2	15 - 20	Galvanized / SS	Double	650	600	780
AEPW25/2	20 - 25	Galvanized / SS	Double	750	600	800
AEPW30/2	25 - 30	Galvanized / SS	Double	1250	600	800
AEPW40/2	30 - 40	Galvanized / SS	Double	1250	600	820
AEPW50/2	40 - 50	Galvanized / SS	Double	1850	600	850
AEPW60/2	50 - 60	Galvanized / SS	Double	1850	600	880
AEPW70/2	60 - 70	Galvanized / SS	Double	1850	600	930
AEPW90/2	70 - 90	Galvanized / SS	Double	2450	600	960
AEPW110/2	90 - 110	Galvanized / SS	Double	3600	600	1000

## FIBER OPTIC CABLE PULLING GRIPS

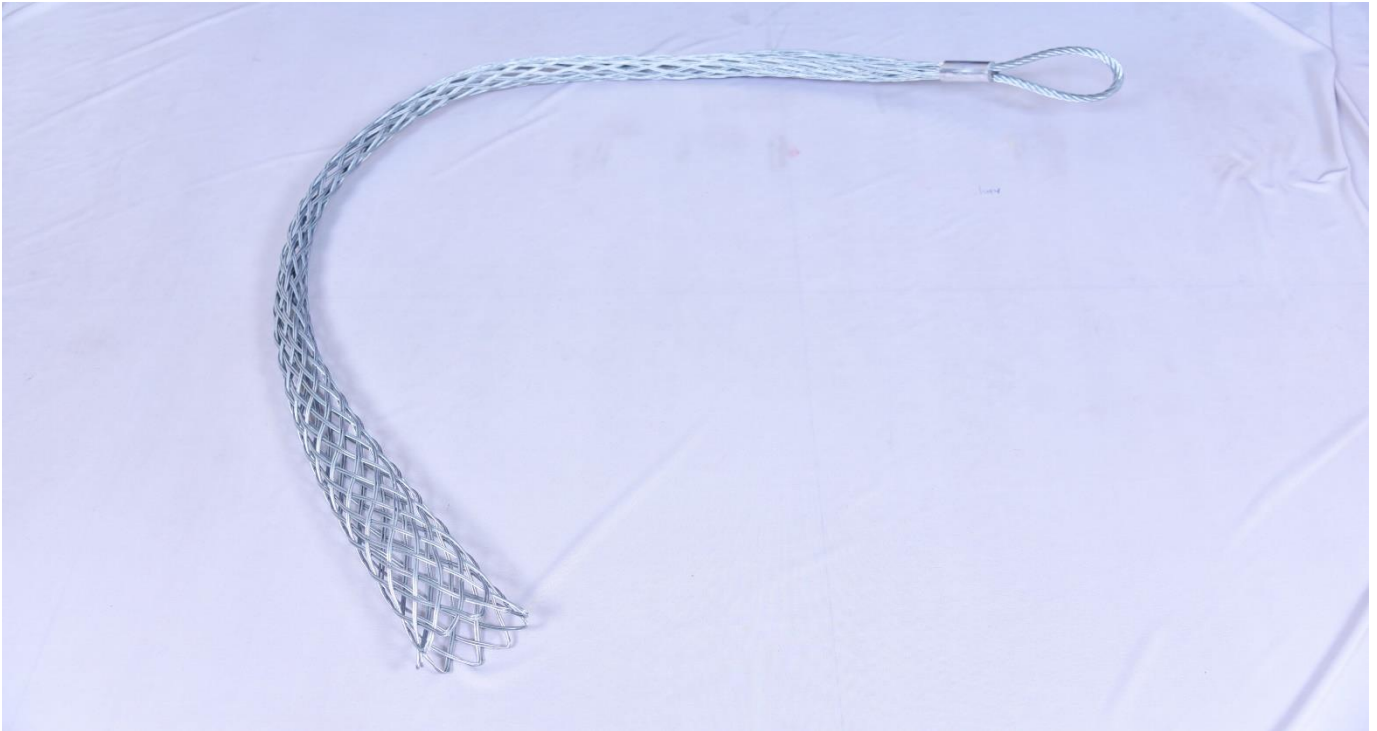

FIBER OPTIC CABLE PULLING GRIPS						
Part No	Cable Diameter in mm	Material	Weave	Working Load Limit in Kg	Grip Length in mm	Total Length in mm
AEP 09/F1	06 - 09	Galvanized	Single	100.00	500	600
AEP 12/F1	09 – 12	Galvanized	Single	100.00	500	600
AEP 15/F1	12 – 15	Galvanized	Single	200.00	500	600
AEP 19/F1	15 – 19	Galvanized	Single	250.00	500	600
AEP 25/F1	19 – 25	Galvanized	Single	400.00	500	600
AEP 31/F1	25 – 31	Galvanized	Single	550.00	500	600



## SINGLE AND DOUBLE END SNAKE GRIPS



Model	Snakes Range	WL (lbs.)	UTS (lbs.)	Swing Link	Eye-Eye Swivel
LSG 1/4-1/2	1/4" - 1/2"	1,200	2,400	A - 5/16"	A - 1/4"
LSG 1/2-1	1/2" - 1"	2,500	5,000	A - 5/16"	A - 1/4"
LSG 1-1½	1" - 1½"	3,500	7,000	B - 7/16"	B - 5/16"
LSG 1½-2	1½" - 2"	4,000	8,000	C - 9/16"	C - 3/8"
LSG 2-2¾	2" - 2¾"	5,000	10,000	C - 9/16"	C - 3/8"
LSG 2¾-3½	2¾" - 3½"	5,000	10,000	C - 9/16"	C - 3/8"
LSG 3½-4¾	3½" - 4¾"	5,000	10,000	C - 9/16"	C - 3/8"



## ALUMINUM / COPPER FERRULE





Ferrule Size Number	Internal Size (a) mm	Tolerance (b) mm	Wall Thickness mm	Tolerance (d) mm	Length (e) mm	Tolerance (f) tmm
2.5	2.7	0.20	5.4	0.20	1.05	0.09
3	3.3	0.20	6.6	0.20	1.25	0.12
3.5	3.8	0.20	7.6	0.20	1.5	0.13
4	4.4	0.20	8.8	0.20	1.7	0.15
4.5	4.9	0.20	9.8	0.20	1.9	0.17
5	5.5	0.20	11	0.20	2.1	0.19
6	6.6	+0.15	13.2	#0.15	2.5	0.22
6.5	7.2	+0.15	14.4	#0.15	2.7	0.24
7	7.8	+0.15	15.6	#0.15	2.9	0.26
8	8.8	+0.20	17.6	#0.20	3.3	0.29
9	9.8	+0.20	19.8	#0.20	3.7	0.33
10	10.9	+0.20	21.8	#0.20	4.1	0.37
11	12.1	+0.30	24.2	#0.30	4.5	0.41
12	13.2	+0.30	26.4	#0.30	4.9	0.44
13	14.2	+0.30	28.4	#0.30	5.4	0.48
14	15.3	+0.30	30.6	#0.30	5.8	0.52
16	17.5	+0.30	35	#0.30	6.7	0.57
18	19.6	+0.30	39.2	#0.30	7.6	0.61
20	21.7	+0.30	43.4	#0.30	8.4	0.64

### Note:

The chart above is a partial representation based on the image provided. All dimensions are in millimeters (mm), and the tolerances are indicated with a plus or hash symbol to denote the allowable variation

## MILD STEEL / STAINLESS STEEL THIMBLE

Type	a	b	b	S	L(Length)
M2	7.9	13	4.7	0.5	19
M3	9.7	17.4	5.7	0.5	23
M4	12.3	20	7	0.5	25
M5	13.7	23	8.2	0.8	32
M6	16	28	8.5	0.8	35
M8	21.4	36	12	1.2	48
M10	24	38	14.6	1.2	56
M12	27	43	17.6	1.5	66
M14	33	50	19	1.6	71
M16	41	64	23.7	2	83
M18	41	66	25	2	93
M20	44	69	26.5	2	101

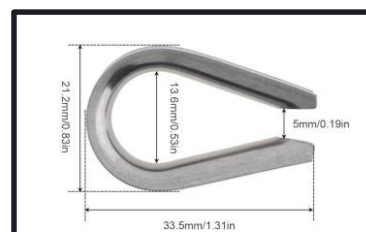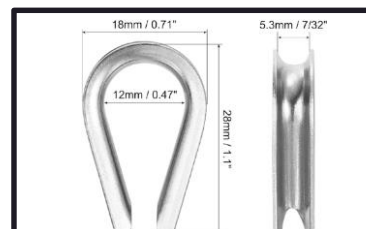

### Note:

Due to different batches and manual measurement, please allow 1-2 mm differs. Unit: mm

## GALVANIZED / STAINLESS STEEL SLINGS



Rope Diameter (mm)	Nominal Length (m)	Minimum Breaking Load (kN)	Typical Use
6	1-100	24.3	General lifting in construction and industrial applications
8	1-100	43.4	Used for hoisting equipment and materials
10	1-100	67.8	Suitable for towing and anchoring operations
12	1-100	97.9	Ideal for marine and fishing industry tasks
16	1-100	173.5	Employed in heavy-duty lifting and rigging
20	1-100	270.7	Used in crane lifting and structural supports

### Note:

The table above provides a general idea of the dimensions and uses of Galvanized Rope Slings. The actual breaking load and lengths available may vary depending on the manufacturer and specific product line. Always refer to the manufacturer's specifications and guidelines for detailed information and ensure the sling is suitable for the intended use.

## QUICK LINK STAINLESS STEEL 304 AND 316



Size (inches)	Length (A)	Width (B)	Diameter	Inside Length(X)	Inside Width (Y)	Opening (Z)	Working Load Limit (WLL in lb)	Weight (lb)
1/8"	1.12"	0.38"	0.18	0.75"	1.43"	0.27"	200	0.02
5/32"	1.25"	0.42"	0.27"	0.84"	1.60"	0.31"	300	0.02
1/4"	1.58"	0.48"	0.23	1.00"	2.00"	0.35"	800	0.05
...	1.80"	0.55"	0.32"	1.12"	2.32"	0.42"	1,200	0.08
3/16"	...	...	...	...	...	...	...	...
23/32	4.80"	1.29"	0.91"	3.00"	6.27"	1.17"	11,880	1.82

Property	Grade 304	Grade 316
Composition	18% chromium, 8% nickel	16-18% chromium, 10-14% nickel, 2- 3% molybdenum
Corrosion Resistance	Good resistance to oxidation and many chemicals	Superior resistance to chlorides and acidic substances due to molybdenum
Strength	Good tensile strength and hardness	Higher strength and hardness, especially at elevated temperatures
Weldability	Excellent, with variants like 316L to prevent carbide precipitation	Excellent, with variants like 316L to prevent carbide precipitation
Cost	Less expensive	More expensive due to higher nickel content and molybdenum
Common Applications	Kitchen equipment, industrial applications, architectural paneling	Marine environments, chemical processing equipment, medical devices

## LINE SWIVEL ( ANTI ROTATIONAL DEVICE )




Feature	Specification
Application	Suitable for fiber optic and OPGW cable
Function	Prevents cable twists during installation over pulling blocks
Compatibility	Travels easily over pulling blocks
Design	Weighted attachments to maintain vertical orientation and stop cable rotation
Swivel Attachment	Swivel attached to the head of the device

Capacity (Tons)	Breaking Load (BL)	Safe Working Load (SWL)	Body Diameter	Pin Diameter	Weight
2	8 Tons	2 Tons	30 mm	25 mm	3 kg
5	20 Tons	5 Tons	50 mm	45 mm	7 kg
10	40 Tons	10 Tons	70 mm	60 mm	15 kg
15	60 Tons	15 Tons	85 mm	75 mm	22 kg
20	80 Tons	20 Tons	100 mm	90 mm	30 kg




# CABLE GRIPS

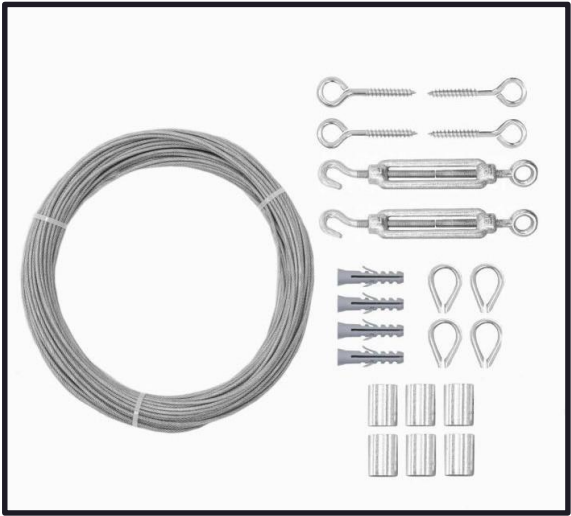

Material	Typically made from stainless steel or galvanized steel.
Load Capacity	Designed to handle varying weight limits based on size.
Design	Features a woven wire mesh structure for flexibility and strength.
Cable Compatibility	Suitable for a wide range of cable sizes and configurations.
Installation	Easy to install with no special tools required; often attaches with a simple pull.
Corrosion Resistance	Coated or treated for durability and resistance to environmental factors.
Safety Features	Designed to provide a secure grip to prevent slippage during use.
Flexibility	Can accommodate different cable shapes, including round and flat.
Ergonomic Design	Allows for easy handling and reduced strain during installation
Versatility	Used in various applications, including electrical, construction, and utility sectors.

# WHIP CHECKS

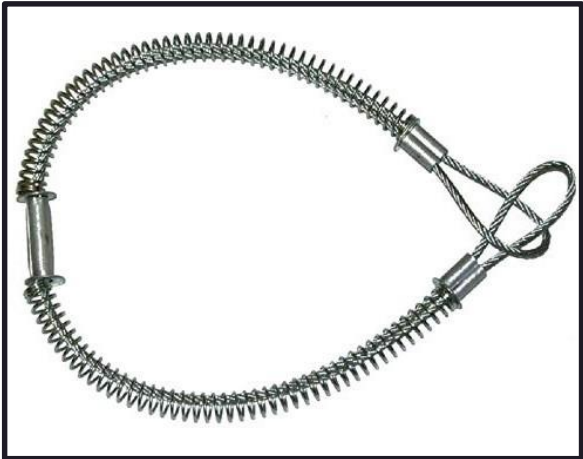

Feature	Description
Material	Typically made from durable materials like steel or rubber.
Design	Consists of a cable or strap with hooks or loops for secure attachment.
Safety Function	Prevents hoses from whipping or disconnecting during operation.
Ease of Installation	Quick and easy to install on hoses or cables without special tools.
Length Options	Available in various lengths to accommodate different setups.
Load Capacity	Rated for specific weight limits based on the model and material.
Corrosion Resistance	Often treated to withstand harsh environments and prolong lifespan.
Flexibility	Can be used with a variety of hose sizes and types.
Visibility	Often features bright colors for easy identification in the field.
Versatility	Commonly used in industries such as construction, mining, and manufacturing



**ANVEARYA ENGINEERING  
PRODUCTS LLP**

Milkat No.849, Kamathe Patil Sadan  
Kondhwa Budruk, Pisoli Road Pune-  
411048

+91 8779957640 / 8879665060

[info@anvearya.com](mailto:info@anvearya.com) / [sales@anvearya.com](mailto:sales@anvearya.com)

[www.anvearya.com](http://www.anvearya.com)

