




Product Engineering Solutions along with Manufacturing support

DOCK LEVELLER

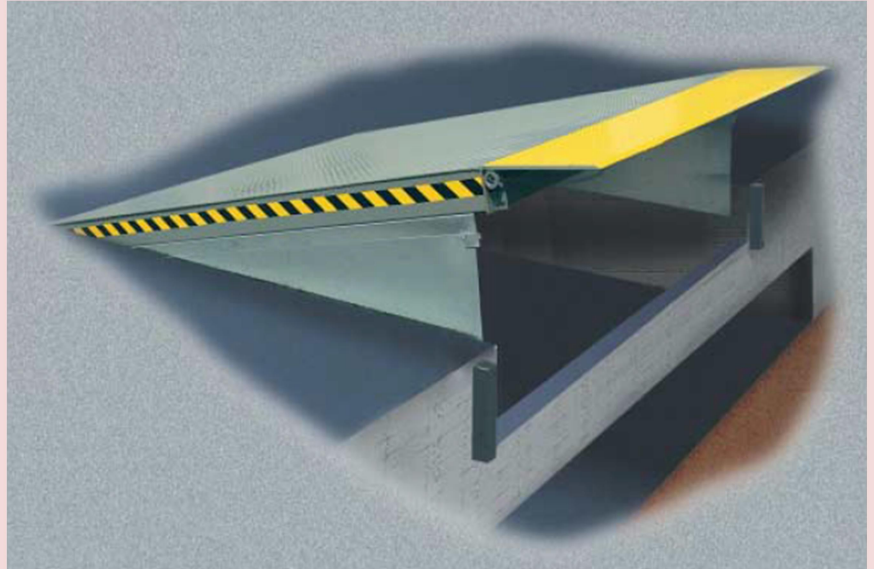

Product Description

We hold expertise in Designing and supplying highly efficient Fixed Dock Leveler that is used in various industrial applications. It is manufactured using innovative technology by our dexterous professionals and is available in different technical specifications to meet the diverse requirements of the clients. Our quality controllers test this product on various parameters to ensure its flawlessness. The offered Fixed Dock Leveler is ideal for handling adverse working conditions and requires less maintenance.

Office:

680/A, Bazar Peth,
Sangamner,
Dist. Ahmadnagar
Maharashtra, India.
Pin - 422605

Phone: +91.8600716239 /
+91.7020877110

E-mail:

Enquiry@qtservices.in
Enquiry.qtservices@gmail.com

Website:

www.qtservices.in

MODEL	DECK LENGTH	DECK WIDTH	SERVICE RANGE
HDL-2218XX	2200 mm	1800 mm	300 mm
HDL-2518XX	2500 mm	1800 mm	300 mm
HDL-2524XX	2500 mm	2400 mm	300 mm
HDL-2530XX	2500 mm	3000 mm	300 mm
HDL-2930XX	2900 mm	3000 mm	300 mm

Replace 'XX' with 30, 60 & 90 as per Capacity 3000, 6000 & 9000 Kg

OVERVIEW

An electro-hydraulic dock-leveler is not simply “a bridge for connecting a vehicle”.

Frequently the important characteristics that this tool needs are undervalued, in order to guarantee an efficient working environment to comply with the safety in work regulations.

Since the invention of the hydraulic dock leveler, very poor design improvement has been implemented by manufacturers of the traditional types, and the result is old concept products with poor characteristics in respect of safety in work and installation.

A completely different concept is applied to satisfy different customer needs, offering new advantages and often cheaper costs.

FEATURES:

- Long working life
- Robustness
- High strength
- Smooth operation
- Working Range Toe Guards
- Quality Dock Leveler
- Easy to Install and Operate
- Minimum maintenance
- Long Lasting
- Safe
- Ergonomic Console

TECHNICAL SPECIFICATION:

- Platform material - Steel non-slip
- Driving lift cylinder – Hydraulic
- Driving lip cylinder - Hydraulic
- Electric motor – 1.0 kW
- Electric motor voltage - 230V / 50Hz - 3ph
- Operational voltage - 230V AC

- Protection grade - Minimum IP55
- Maintenance strut - Included
- Hydraulic safety features - Pipe break valves, Overload valves
- Extra security - Sectional door connection
- Finish - Anti-corrosive finish - RAL 5010 Blue or other as required
- Above dock operation +300mm
- Below dock operation -300mm

STANDARD FEATURES

- Bumpers
- Lip 16"
- Grease Fittings
- Working Range Toe Guards
- Deck Support, Structural "I" Beam
- Fully Hydraulic Actuation
- In-Line Safety Stop (Prevents Free-Fall)
- Maintenance Strut

ADD-ON ACCESSORIES

- Rubber Bumpers
- Variable Lip Length
- Accommodating narrow & wider vehicles
- Full range Toe guard
- Laminated Bumpers
- Yellow & black color diagonal Safety strips
- Wall mounted Console
- Weather seals

CONTACT US:

Enquiry@qtservices.in
Enquiry.qtservices@gmail.com

Phone: +918600716239 /
+917020877110

Visit us at: www.qtservices.in