
A MOMENT OF MAKING







There is something very powerful about the word new; a new day, a new idea, a new chapter a new ambition. New is the inspiration that can change today's world and give us a new future.

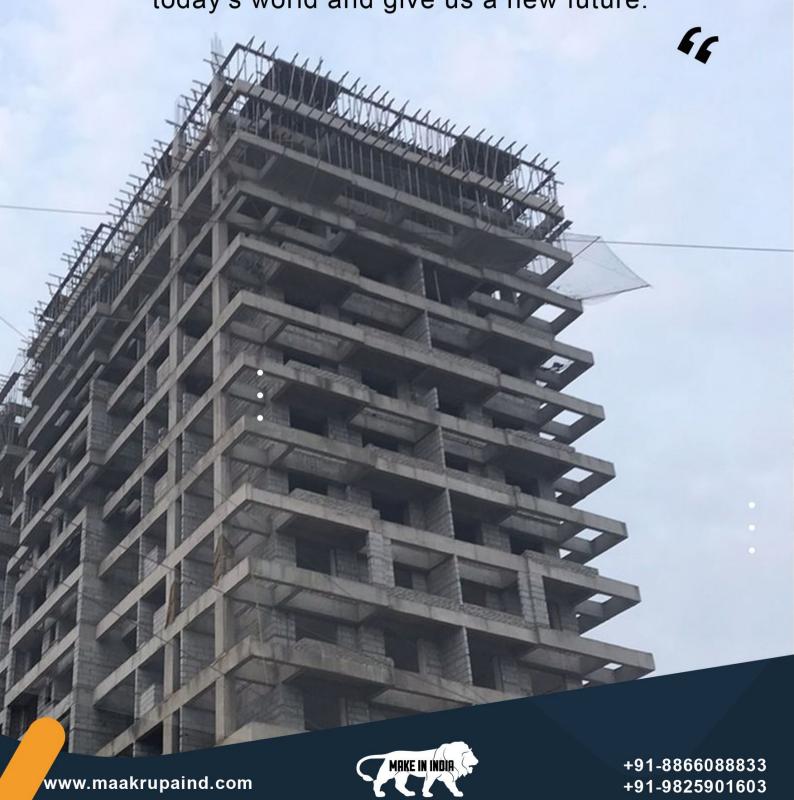





Cutting Machine



500 kg Load Capacity



300 kg Load Capacity



250 kg Load Capacity



Ind.Mechanical.Good Lift



Cutting Machine









Specification:-

Bad Size : Cutting Size

 12^{ft} X 4^{ft}
 10^{ft} X 4^{ft}
 8^{ft} X 4^{ft}

 10^{ft} X 4^{ft}
 8 ft X 4^{ft}
 6^{ft} X 4^{ft}

Motor

7.5 HP 3 Phase Standard Motor


Blade Size

14 inch





250 Kg Load Capacity on Single Rope

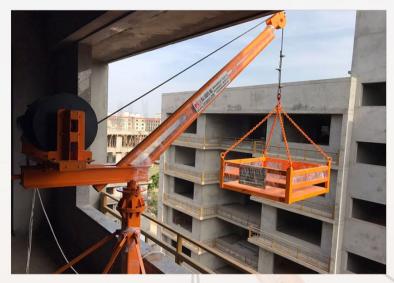



Speciality:-

	±1.	
Baket Size	30 inch X 30 Inch	-
Lifting Speed	28 Mtr / Min	28 Mtr / Min
Rope Size	8 mm	10mm
Motor	2 HP/ 3 Phase Break Motor	3 HP /3 Phase Break Motor
Gear Box	Helical Gear Box	Heavy / helical Gear Box
Floor Height	(14 Floor) 50 Mtr	(22 Floor)80Mtr
Remote	1 Nos (Rain Proof)	1 Nos (Rain Proof)
Remote Cable	2 Sq mm (2 Mtr)	2.5 Sq mm (3 Mtr)
Warranty	6 Month	6 Month





300 Kg Load Capacity on Single Rope





Speciality:-

Baket Size 40 inch X 30 Inch
Lifting Speed 28 Mtr / Min
Rope Size 10 mm

Supporting 6mm

Motor 3 HP/ 3 Phase Break Motor

Gear Box
Helical Gear Box
Floor Height (14 Floor) 50 Mtr
Remote 1 Nos (Rain Proof)

Remote Cable 1 Sq X 3 core (50 Mtr)

Panel Box 3 to 5 HP
Warranty 6 Month

40 Inch X 30 Inch

28 Mtr / Min

12 / 14 mm

8 mm

5 HP /3 Phase Break Motor

Heavy / helical Gear Box

(22 Floor)80Mtr

1 Nos (Rain Proof)

1.5 Sq X 3 core (80 Mtr)

6 to 8 HP

6 Month





500 Kg Load Capacity on Single Rope





Speciality:-

Baket Size 40 inch X 40 Inch

Lifting Speed 25 Mtr / Min

Rope Size Supporting 6mm

3 HP/ 3 Phase Break Motor Motor

12 mm

Gear Box Helical Gear Box

Floor Height (14 Floor) 50 Mtr

Remote 1 Nos (Rain Proof)

Remote Cable 1 Sq X 3 core (50 Mtr)

3 to 5 HP Panel Box

6 Month Warranty

45 Inch X 42 Inch

25 Mtr / Min

16 mm

8 mm

5 HP /3 Phase Break Motor

Heavy / helical Gear Box

(22 Floor)80Mtr

1 Nos (Rain Proof)

1.5 Sq X 3 core (80 Mtr)

5 to 10 HP

6 Month





Industrial Mechanical Good Lift





Speciality:-

1 ton to 2.5 ton Capacity Electric Break Motor Opearting Wire Rope 12 mm / 14 mm / 16 mm As Par Your Requirement Max Height 10 Ft Min Height Plat Form Size As Par Your Requirement Power Panel Snider / L& T Fabrication 50 X 5 angle & 3 X 1 1/2 chanel 63 X 6 angle & 4 X 2 chanel

Features:

- Overload Safety
- UP & Down Limit Set
- 3 nos power remote
- Heavy Fabrication
- Redox Paint





Operating rules for cargo elevators and freight lift

- Manned operation is strictly prohibited.
- Overload operation is strictly prohibited.
- The freight lift should be evenly placed when transporting goods, and not partial load to ensure the smooth operation of the lifting platform.
- ✓ When the manual hydraulic forklift lifts with goods on this freight lift, the
 fork arm of the forklift should be lowered to the lowest level and the
 handlebar should be twisted to prevent the forklift from moving when the
 platform is lifted.
- Confirmed all doors of lift are closed before lifting operations. It is strictly forbidden to use other methods to press down the sensing device.
- It is strictly forbidden to stand under the lifting platform.
- ✓ It is strictly forbidden to switch or press the emergency brake button during the normal lifting of the lift, and it is strictly forbidden for the operator to leave during the lifting of the platform.
- ✓ When the lift is out of use, the work surface should be lowered to the bottom.
- ✓ When it is not used for a long time, it should be empty to run 1-3 times before lifting the goods.
- ✓ When the lift fails, the maintenance personnel of the manufacturer should be notified in time, and no operation is allowed. Non-professionals are not allowed to repair the lift.





INDUSTRIES

No 9 , Sankar Estate , Nr. Revabhai Estate , b/h C.T.M. Mills Amraiwadi, Ahmedabad-380026.

www.maakrupaind.com

Ankit Gohel +91-8866088833 Dharmesh Gohel +91-9825901603

