


WONDERFLOOR
Vinyl Flooring

HOW
ROBUST
2.0 mm
WITH PUR

www.wonderfloor.com

Robust

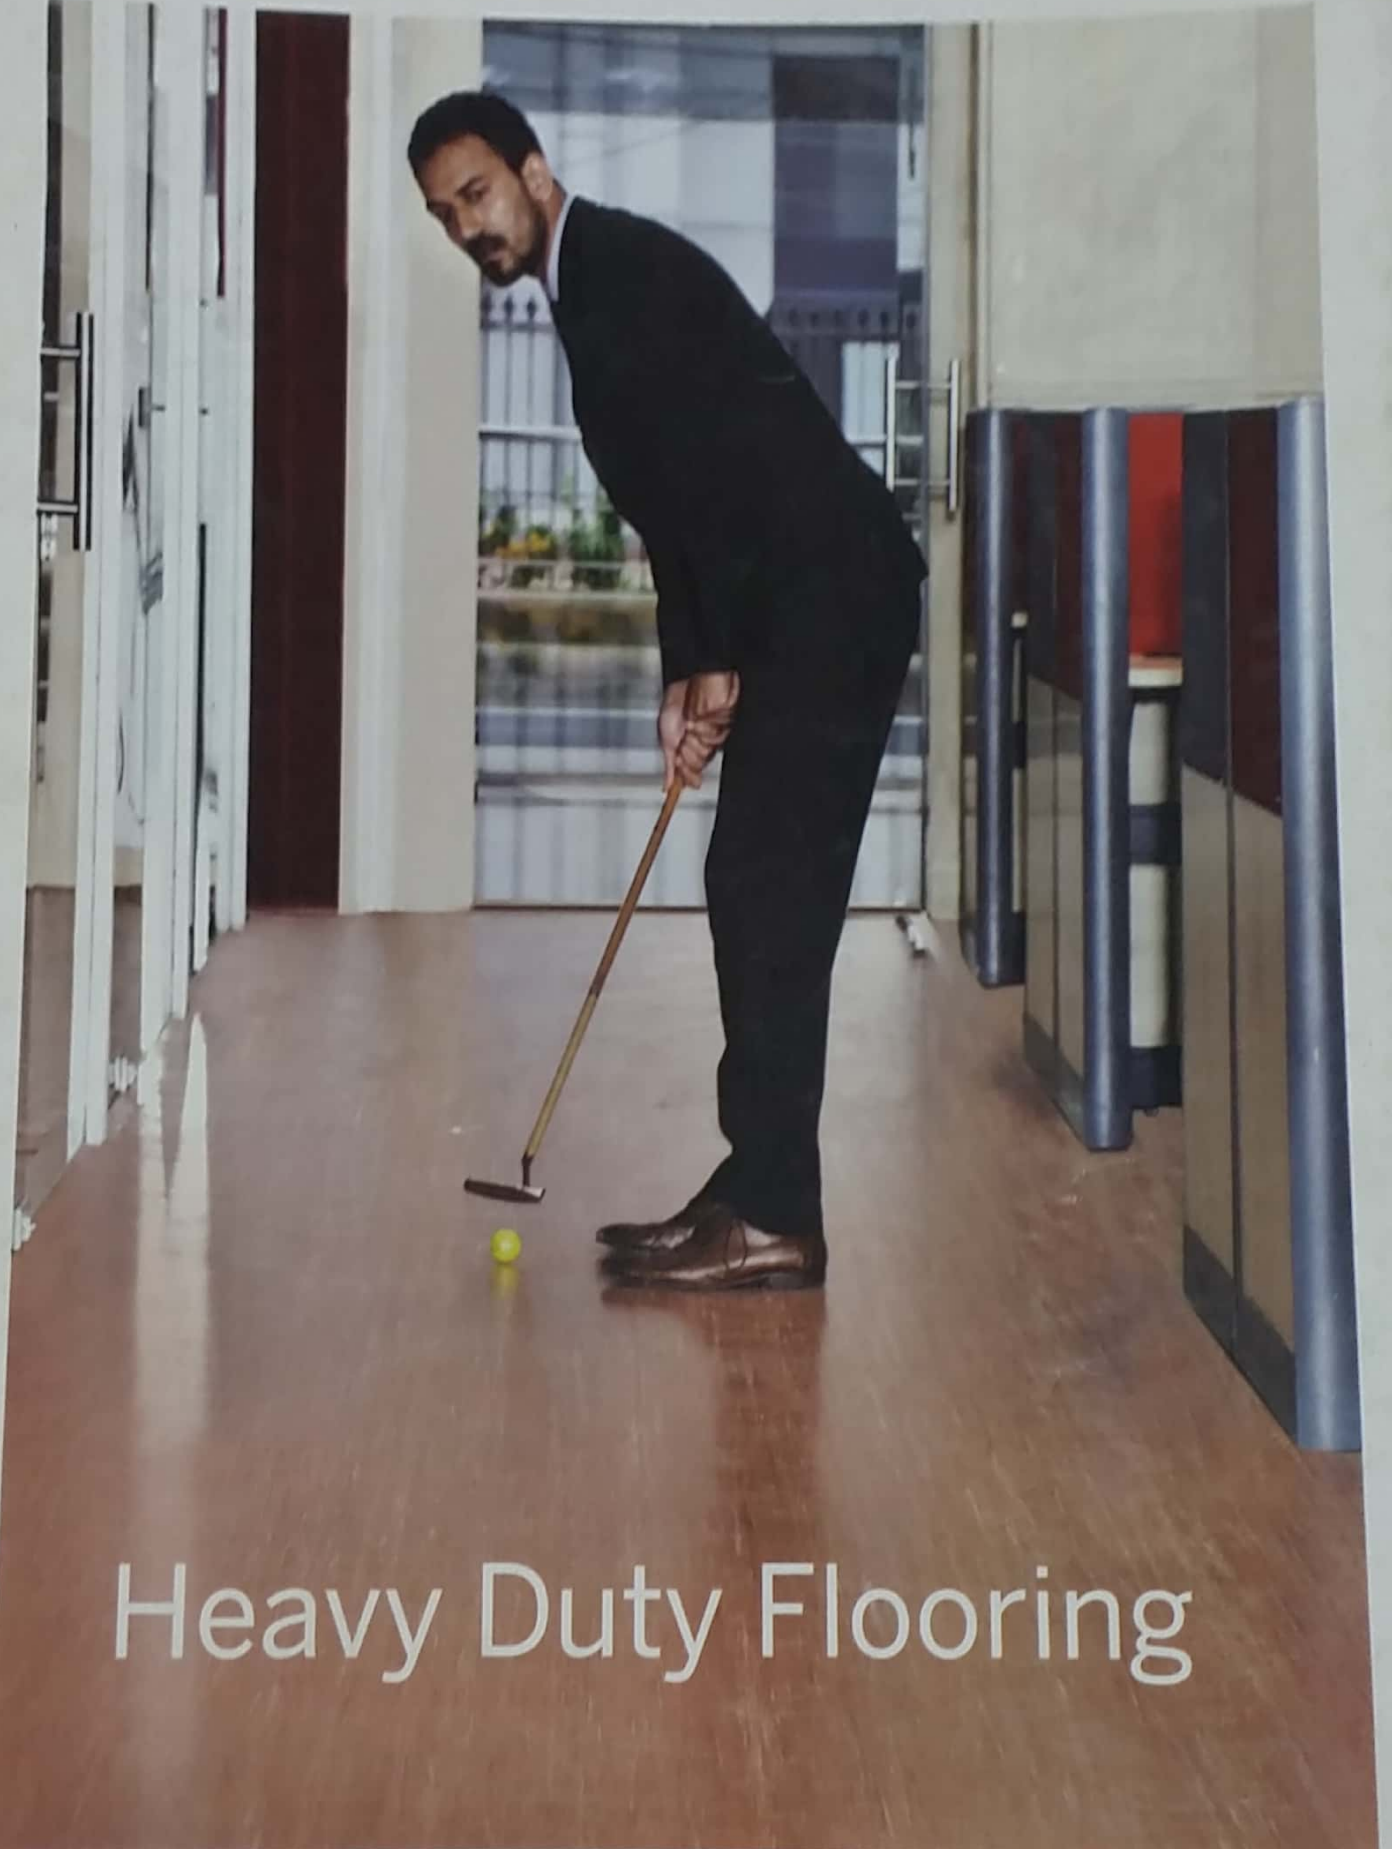


Heavy Duty Flooring

WONDERFLOOR
Vinyl Flooring

NOW
ROBUST
2.0 mm
WITH PUR


www.wonderfloor.com

Robust

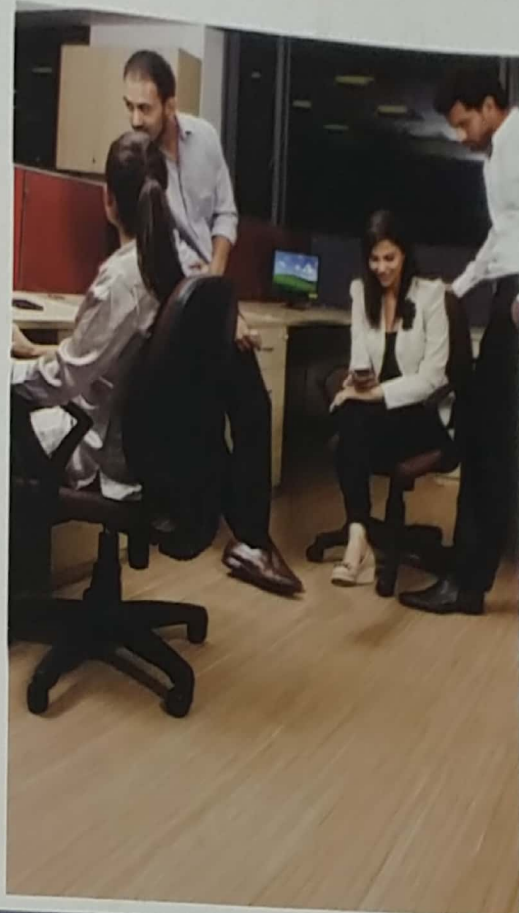

Blue Water




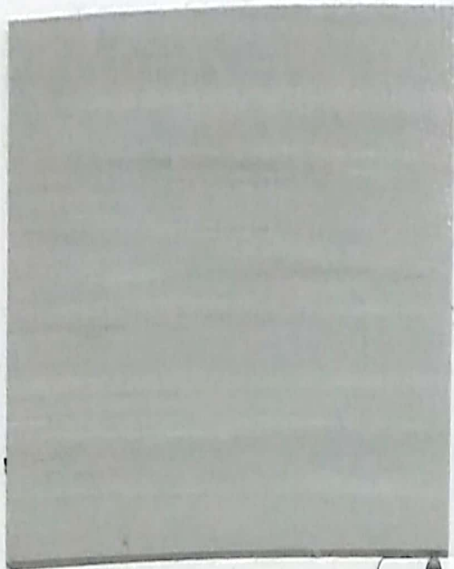

Iceberg



Oyster

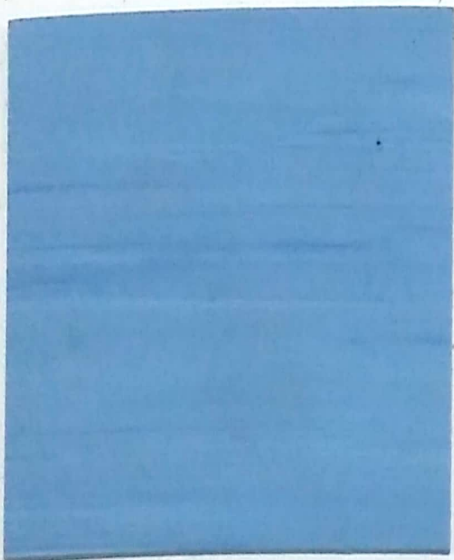


Carolina Blue



Mercury



Florida

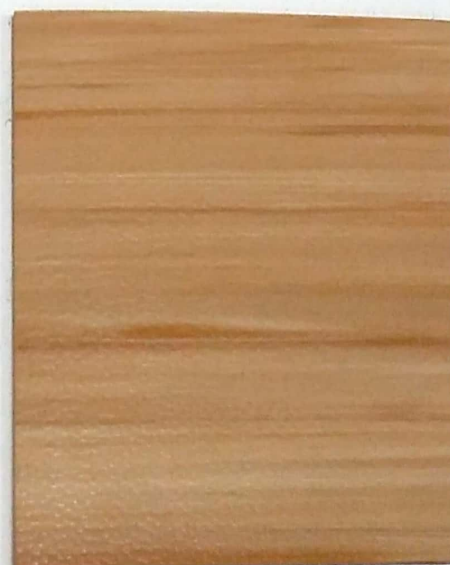

Amber





Desert Sand




Lee Copper



Coral Feast



Saffrony

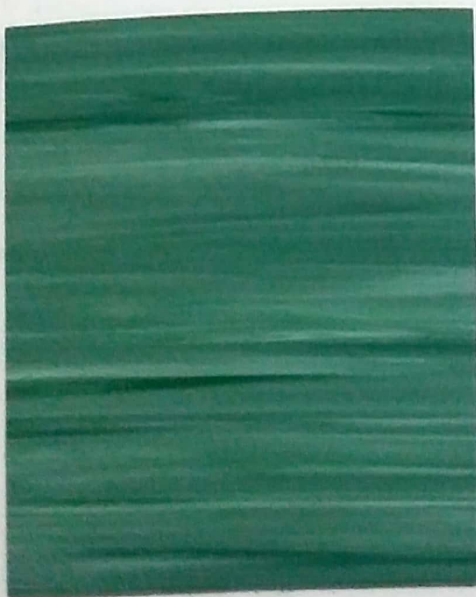

Emerald Green



Ice Land



WONDERFLOOR - the world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2008 systems approved company. We are the largest manufacturers & exporters of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the-art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

ROBUST - Heavy Duty Vinyl Flooring Robust is a high strength, resilient, non chip, non crack, laminated homogeneous flooring. Robust is specially designed to withstand high wear & tear applications and conforms to IS 3462 standards with various other international standards.

PERFORMANCE CHARACTERISTICS		
CHARACTERISTICS	TEST METHOD	RESULT
DIMENSION		
• ROLLS	 EN 426	2 00 mm X 1.50 mtr x 20 mtr 2.00 mtr x 15 mtr
• TILES	 EN 427	305 mm x 305 mm = 50 pcs.
THICKNESS-OVERALL	 EN 428	2.00 mm/1.5 mm.
TOTAL WEIGHT	 EN 430	3.40 kg /Sq. for 2.00 mm
DIMENSION STABILITY	 EN 434	≤ 0.4%
RESIDUAL INDENTATION AFTER STATIC LOAD	 EN 433	≤ 0.10 MM
FLEXIBILITY	 EN 435	40 MM MANDREL, PASSED
ABRASION RESISTANCE	 EN 660-2 EN 649	WEAR GROUP P
SURFACE SPREAD OF FLAME	 BS 476 PART 7	CLASS 1
FIRE PROPAGATION	 BS 476 PART 6	(i) = 10.8 } Class "0" (ii) = 1.7 }
HYGIENE		SUITABLE FOR HEALTHCARE APPLICATION
COLOUR FASTNESS TO DAYLIGHT	 ISO 105-B02	> BLUE WOOL STANDARD 5
SLIP RESISTANCE	 DIN 51130	R 9
BEARING A CASTOR CHAIR	 EN 425	SUITABLE/CONTINUOUS USE
RESISTANCE TO CHEMICALS	 EN 423	NO VISIBLE CHANGE
SOUND ABSORPTION	 ISO 140-8 EN ISO 717-2	5 db
PERFORMANCE CLASSIFICATION	 EN 685	34, 41
PUR		Available in 2mm

RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18° C and 27° C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic based adhesive of similar type.


MAINTENANCE

Do's: • The surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the surface • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

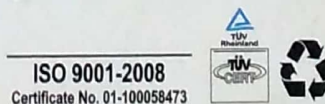

RMG POLYVINYL INDIA LIMITED

Registered Office : UGSR 4, Ansal Plaza, Sector 1, Vaishali Ghaziabad 201 010, (U.P) INDIA

Tel.: +91 120-4284802/803/804/805/806, Fax: 91 11 66173679, E-mail: info@rmgpoly.com

Regional Offices : • Ahmedabad: +91 9377262959 • Bangalore: +91 9341263704 • Bhubaneswar: +91 9337423999
• Chennai: +91 9380353335 • Guwahati: +91 8822021287 • Hyderabad: +91 9533791422
• Indore: +91 9827791420 • Kolkata: +91 8820568222 • Kochi: +91 9349191423 • Lucknow: +91 9026708007
• Mumbai: +91 9323675979 • Pune: +91 9595191421 • Patna: +91 8252110100 • Raipur: +91 9827791419

www.wonderfloor.com

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited