

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TRENDO**

**PRIME  
SERIES**

**PUR**

**MADE  
in  
INDIA**

**Multi Purpose Flooring**  
(With anti-bacterial properties)



Multi Purpose Flooring

**Trendo** *Wood*



Ash wood TW 41




Maple white TW 42




Red Alm TW 43



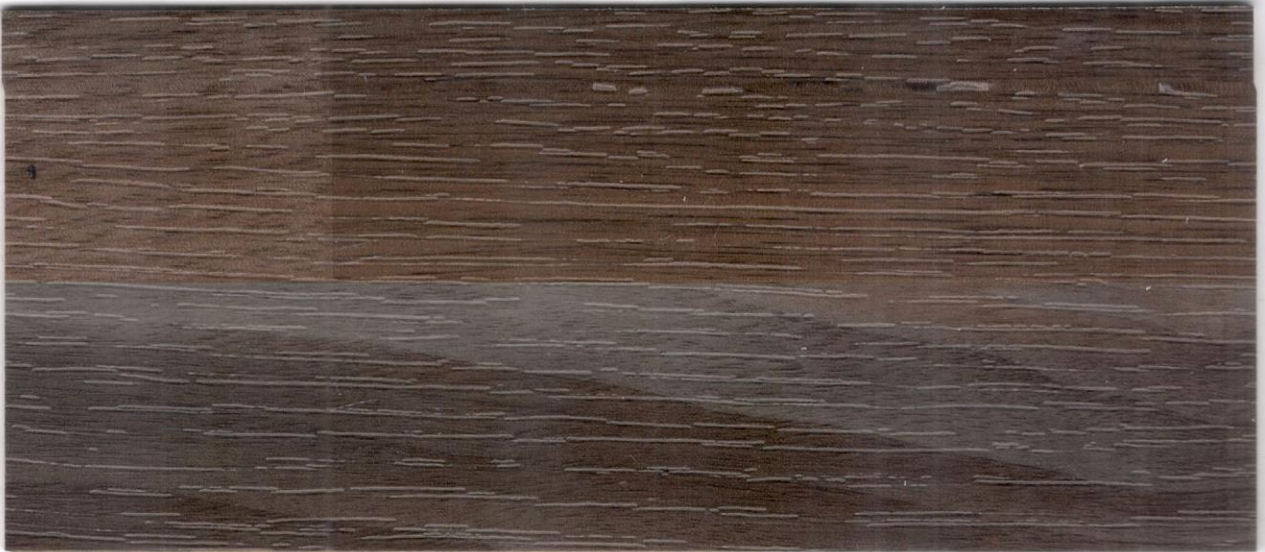

Eucalyptus TW 44

## Trendo multiple layers for multiple benefits

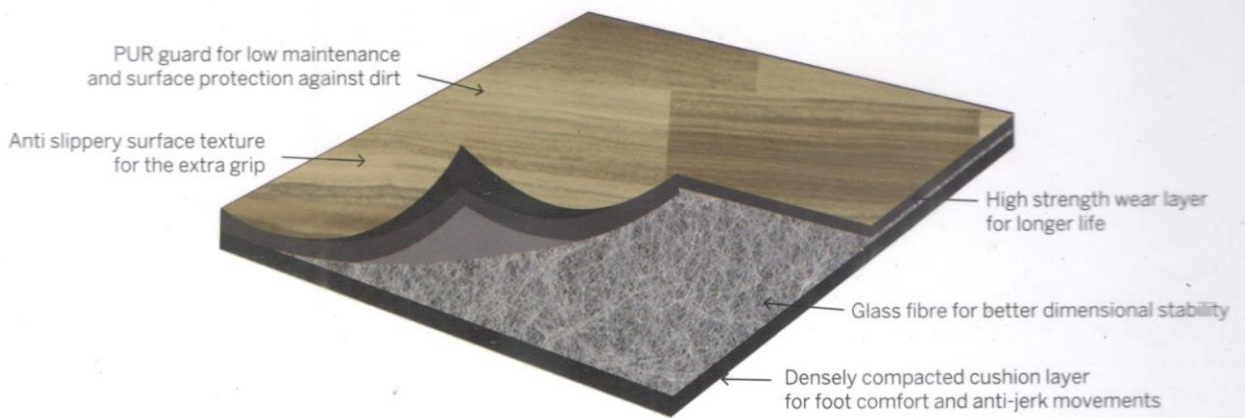

Scan to visit  
Trendo Wood page  
on Wonderfloor  
website



Scan to visit  
Trendo Chips page  
on Wonderfloor  
website



### Anti-Bacterial Flooring



Termite  
Proof



Moisture  
Proof



Environment  
Friendly

#### Application areas:

- Office Area
- Hospitals
- Hotels
- Cafeteria
- Schools
- Large Retail Space
- Auditorium
- Library




Multi Purpose Flooring

**Trendo DLX**




D Brown

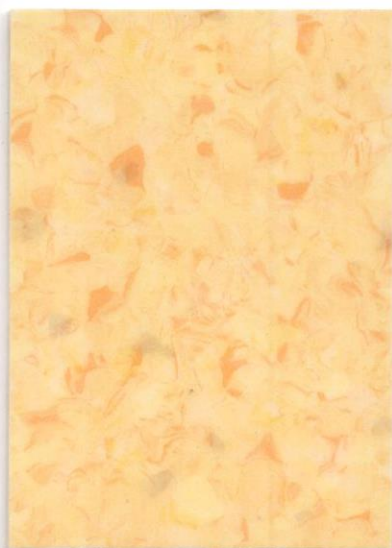


Daffodil




Dk Grey

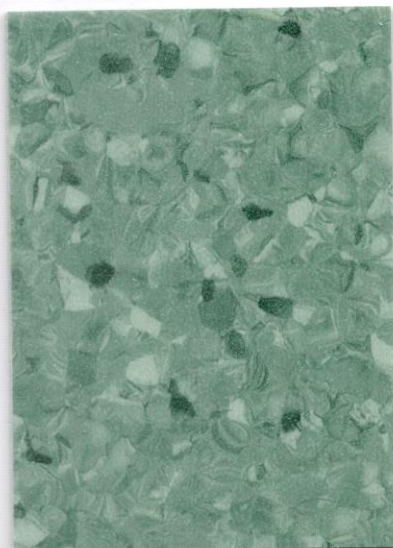

F Green

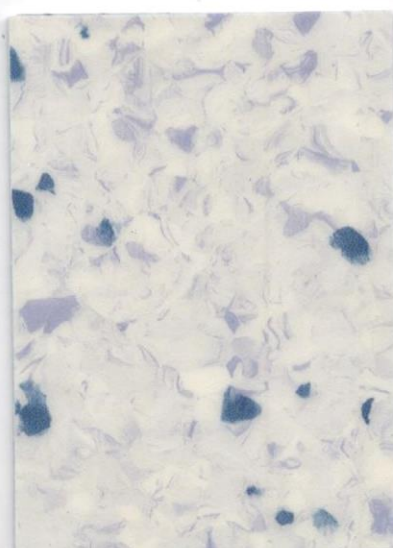

Icy Blue

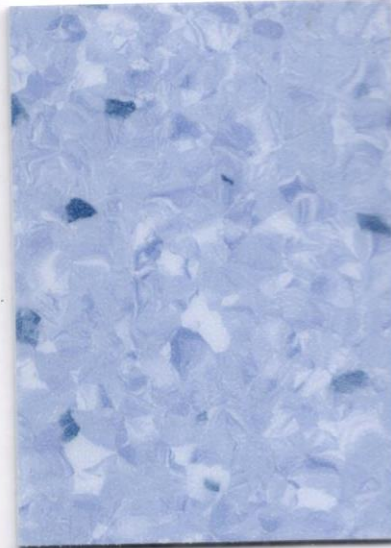

River Blue



Royal Ivory



S Grey



Terracotta





**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems' certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the-art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**Trendo** - Wonderfloor Trendo is a state-of-the-art multi application flooring produced keeping in mind the India quest for the latest trend, the climate conditions and the best abrasion resistance in the category. Trendo flooring is available in attractive design pattern, it is highly suitable for large working areas like offices, hospitals, libraries, educational institutes, stores, cafeterias and many other similar applications.

## PERFORMANCE CHARACTERISTICS

| CHARACTERISTICS                       | TEST METHOD                     | TRENDO RESULT                                                  |
|---------------------------------------|---------------------------------|----------------------------------------------------------------|
| Thickness (mm)                        | EN 428 / ISO 24346              | 2.00                                                           |
| Total Weight (kgs/sq-mts)             | EN 430                          | 3.20 Kg/Sq. mtr                                                |
| Rolls dimension (mtrs)                | EN 426                          | 2 mtr X 15 mtr                                                 |
| Surface Protection                    | PUR                             | PUR Protection (optional)                                      |
| Thickness of wear layer (mm)          | EN 429                          | 0.35                                                           |
| Slip Resistance                       | DIN 51130 / ASTM D2047          | R 9                                                            |
| Residual Indentation                  | EN433/ISO23343-1/ASTM F970      | ≤0.40mm                                                        |
| Flexibility (mm)                      | EN 435/ISO 24344/ASTM F137      | 20mm mandrel, passed                                           |
| Dimension Stability (%)               | EN 434/ISO 23999                | ≤0.10%                                                         |
| Bearing a castor chair                | EN 425/ISO4918                  | Suitable / Continuous use                                      |
| Performance Classification            | EN 685/ISO10874                 | 31,32                                                          |
| Thermal Resistance (m2k/w)            | EN 12664/ISO 8302/ASTM 1514     | <0.00568, passed                                               |
| Hygiene / Clean room test             | ISO 14644 - 1                   | Test result demonstrates it inhibits growth of microbes ClassA |
| Abrasion Resistance                   |                                 |                                                                |
| Volume loss (Weight loss/1000 cycles) | EN 660-2/EN 649/ASTMD 3389 (8)  | Wear group P                                                   |
| Sound absorption                      | ISO 140-8, EN ISO 717-2         | 14DB                                                           |
| Stain Resistance                      | EN 423/ISO 26987                | O, Excellent Resistance                                        |
| Resistance to chemicals               | ASTM F925                       | No visible change                                              |
| Colour Fastness to daylight           | ISO 105-B02/ASTM F1515          | >Blue Wool Standard 5                                          |
| Surface spread of flame               | BS 476 PART 7                   | Class 1                                                        |
| Fire Propagation                      | BS 467 PART 6                   | (i) = 10.8<br>(ii) = 1.7 } Class "O"                           |
| Reaction to fire (kw/m2)              | EN ISO 9239-1<br>EN ISO 11925-2 | CflS 1                                                         |
| Class                                 | EN 13501-1:2007+A               |                                                                |
| Type                                  | ASTME - 648-06                  |                                                                |
| Maritime Usage                        |                                 | Suitable                                                       |



### RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

### MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)

or call : +91 9711200510

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com)

or call : +91 9873138885 / +91 9953208740



### RMG POLYVINYL INDIA LIMITED

Corporate Office : UGSR 4, Ansal Plaza, Sector 1, Vaishali Ghaziabad 201 010, (U.P) INDIA

Tel.: +91 120-4284802/803/804/805/806. Fax: +91 11 66173679

E-mail: [info@rmgpoly.com](mailto:info@rmgpoly.com), [www.wonderfloor.co.in](http://www.wonderfloor.co.in)

Regional Offices : • Ahmedabad: 9377262959 • Bangalore: 8088083037 • Bhubaneswar: 9582624009  
• Chandigarh: 9023363357 • Chennai: 9380353335 • Guwahati: 9999014098 • Hyderabad: 9953724744  
• Indore: 7838590904 • Kolkata: 9582538009 • Kochi: 8893191421 • Lucknow: 9026708007  
• Mumbai: 9323675979 • Patna: 8252110100 • Pune: 9595191421 • Raipur: 9582431919

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited





**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TRENDO**

**PRIME  
SERIES**

**PRIME  
SERIES**

**TRENDO**

**WONDERFLOOR**

**Multi Purpose Flooring**  
(With anti-bacterial properties)