



2/2 POPPET TYPE, NC/ NO HIGH PRESSURE (70 bar) SOLENOID VALVE

TYPE	PRESSURE

TYPE	PRESSURE
21204	5 - 70 bar



TYPE	PRESSURE
21104	5 - 70 bar
21104EP	5 - 100 bar



FEATURES

- Bubble tight shut off
- Mounts in any position
- Vibration resistance up to 9g
- Suitable for high speed cycling
- Speed up to 300 cycles/ min
- Life > 5 million cycles

WETTED PARTS

Code	B2	B5
Body	Brass	SS 316
Internals	Brass and SS 316	SS 316
Guide Assembly	SS 304	
Shadow-Ring	None	
Plunger, Insert	SS 430	
Spring	SS 302	
Seat, Seals	PTFE, Viton	
Fasteners	SS 304	

AMBIENT AND FLUID TEMPERATURE

-20 °C to 80 °C

SPECIAL VERSION AND SUFFIX

Suffix : (Valve) AM
Special version : (Solenoid) CO, FR, SS, TM

MEDIA

Air, Inert Gases, Water, Free Flowing Liquids, Oil, Diesel, Kerosene, LPG

APPLICATION

Line Mounted

PORT CONNECTION


FUNCTION	INLET	OUTLET
NC	1	2
NO	1	2

Contact Rotex for

- Any other ambient, fluid temperature, media and application
- PED approved valve Orifice 25mm & Higher



OIL Media Temperature Restricted from 0 °C to 100 °C

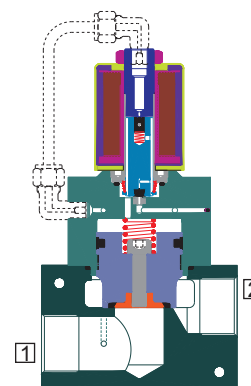

SPARES

(Refer page 25 for ordering code)

SPARE KIT	CODE
Seal Kit : Oring Set and Plunger Assembly	98
Repair Kit : Oring Set, Plunger Assembly, Springs, Manual Override, Guide Assembly Piston Kit	99
Solenoid Kit : Solenoid, Gasket and Nut	34

APPROVAL

(* applied for)

Approval	TYPE 4X, 6P	IP67	Ex d IIC T4 or T5 or T6 IP66	Ex ia IIC T6 IP67	DGMS	CCOE
		✓	✓	✓	✓	✓
		✓	✓	✓		
	✓		*			
			✓	✓		
			✓	✓		
			✓	✓		



