CATALOGUE

1	**SANITARY PAD INCINERATOR GI 50 WOD** 	**TECHNICAL SPECIFICATION** ➢ User friendly feature and easy usable. ➢ Electrically operated 220 volts. ➢ Burn up to 3/4 napkins at a time. ➢ Burning cycle 12/15 minutes. ➢ Ceramic insulation for better thermal protection. ➢ Burning chamber made of Stainless steel. ➢ Automatic temperature controller. ➢ Auto power cut off. ➢ MCB of 16 Amp for safety. ➢ Auto thermal cut off for safety. ➢ Ash collection tray for easy cleaning. ➢ Wall mounted with easy hanging. ➢ Heater 500 watts. ➢ Emission outlet 2” on the top with flexible 1.5 meter pipe. ➢ Body made of CRC sheet duly powder coated. ➢ Dimensions: 10”x10”x14”(L X B X H)
2	**SANITARY PAD INCINERATOR GI 50 D** 	**TECHNICAL SPECIFICATION** ➢ User friendly feature and easy usable. ➢ Electrically operated 220 volts. ➢ Burn up to 3/4 napkins at a time. ➢ Burning cycle 12/15 minutes. ➢ Ceramic insulation for better thermal protection. ➢ Burning chamber made of Stainless steel. ➢ Automatic temperature controller. ➢ Auto power cut off. ➢ MCB of 16 Amp for safety. ➢ Auto thermal cut off for safety. ➢ Ash collection tray for easy cleaning. ➢ Wall mounted with easy hanging. ➢ Heater 500 watts. ➢ Emission outlet 2” on the top with flexible 1.5 meter pipe. ➢ Body made of CRC sheet duly powder coated. ➢ Dimensions: 10”x10”x14”(L X B X H)

3	**SANITARY PAD INCINERATOR** **GI 120 WOD** 	**TECHNICAL SPECIFICATION** ➢ User friendly feature and easy usable. ➢ Electrically operated 220 volts. ➢ Burn up to 5/7 napkins at a time. ➢ Burning cycle 12/15 minutes. ➢ Ceramic insulation for better thermal protection. ➢ Burning chamber made of Stainless steel. ➢ Automatic temperature controller. ➢ Auto power cut off. ➢ MCB of 16 Amp for safety. ➢ Auto thermal cut off for safety. ➢ Ash collection tray for easy cleaning. ➢ Wall mounted with easy hanging. ➢ Heater 1200 watts. ➢ Emission outlet 2” on the top with flexible 1.5 meter pipe. ➢ Body made of CRC sheet duly powder coated. ➢ Dimensions: 10”x12”x22”(L X B X H)
4	**SANITARY PAD INCINERATOR** **GI 120 D** 	**TECHNICAL SPECIFICATION** ➢ User friendly feature and easy usable. ➢ Electrically operated 220 volts. ➢ Burn up to 5/7 napkins at a time. ➢ Burning cycle 12/15 minutes. ➢ Ceramic insulation for better thermal protection. ➢ Burning chamber made of Stainless steel. ➢ Automatic temperature controller. ➢ Auto power cut off. ➢ MCB of 16 Amp for safety. ➢ Auto thermal cut off for safety. ➢ Ash collection tray for easy cleaning. ➢ Wall mounted with easy hanging. ➢ Heater 1200 watts. ➢ Emission outlet 2” on the top with flexible 1.5 meter pipe. ➢ Body made of CRC sheet duly powder coated. ➢ Dimensions: 10”x12”x22”(L X B X H)

5	**SANITARY PAD INCINERATOR** **GI 150** 	**TECHNICAL SPECIFICATION** ➢ User friendly feature and easy usable. ➢ Electrically operated 220 volts. ➢ Burn up to 8/10 napkins at a time. ➢ Burning cycle 12/15 minutes. ➢ Ceramic insulation for better thermal protection. ➢ Burning chamber made of Stainless steel. ➢ Automatic temperature controller. ➢ Auto power cut off. ➢ MCB of 16 Amp for safety. ➢ Auto thermal cut off for safety. ➢ Ash collection tray for easy cleaning. ➢ Wall mounted with easy hanging. ➢ Heater 1500 watts. ➢ Emission outlet 2” on the top with flexible 1.5 meter pipe ➢ Body made of CRC sheet duly powder coated. ➢ Dimensions: 12”x14”x24”(L X B X H)
6	**SANITARY PAD INCINERATOR** **GI 200** 	**TECHNICAL SPECIFICATION** ➢ User friendly feature and easy usable. ➢ Electrically operated 220 volts. ➢ Burn up to 20/25 napkins at a time. ➢ Burning cycle 15/20 minutes. ➢ Ceramic insulation for better thermal protection. ➢ Burning chamber made of Stainless steel. ➢ Automatic temperature controller. ➢ Auto power cut off. ➢ MCB of 16 Amp for safety. ➢ Auto thermal cut off for safety. ➢ Ash collection tray for easy cleaning. ➢ Wall mounted with easy hanging. ➢ Heater 2000 watts. ➢ Emission outlet 2” on the top with flexible 1.5 meter pipe ➢ Body made of CRC sheet duly powder coated. ➢ Dimensions: 14”x14”x26”(L X B X H)

7	**SANITARY PAD INCINERATOR** **GI 300** 	**TECHNICAL SPECIFICATION** ➢ Heater wattage: 3000watt. ➢ Insulation:50mm Ceramic sheet insulation ➢ Material made: CRCA fabrication with powder coating ➢ Capacity: (as per size) ➢ PPE kit : 10-15 per cycle ➢ Mask : 150-200 pr cycle ➢ Hand gloves :100-150 per cycle ➢ Sanitary napkin :100-150 per cycle ➢ Operating voltage :230v/ 50hz ➢ Digital display for temperature indication ➢ Digital temperature controller operator. ➢ Dimensions : 580 x 580 x 1070 (H)
	SANITARY NAPKIN VENDING MACHIINE MANUAL OPERATED	
	M 25 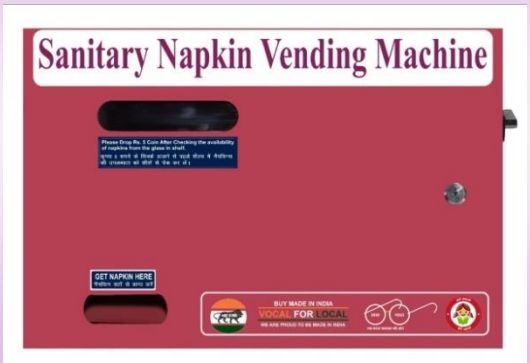 	NAPKIN CAPACITY: 25 Nos. WITH 5 Rs. COIN ACCEPTABLE MACHINE MOUNTING : WALL MOUNTED DIMENSIONS : 19"x6"x12"(L X B X H)
	M 30 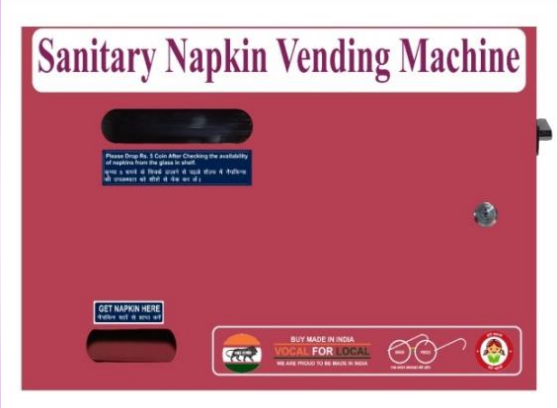 	NAPKIN CAPACITY: 30 Nos. WITH 5 Rs. COIN ACCEPTABLE MOUNTING : WALL MOUNTED

	M 50 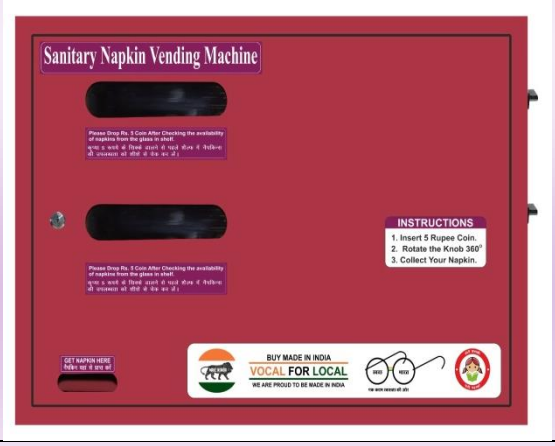 	NAPKIN CAPACITY: 50 Nos. WITH 5 Rs. COIN ACCEPTABLE MOUNTING : WALL MOUNTED DIMENSIONS : 21”x6”x17.5”(L X B X H)
	M 100 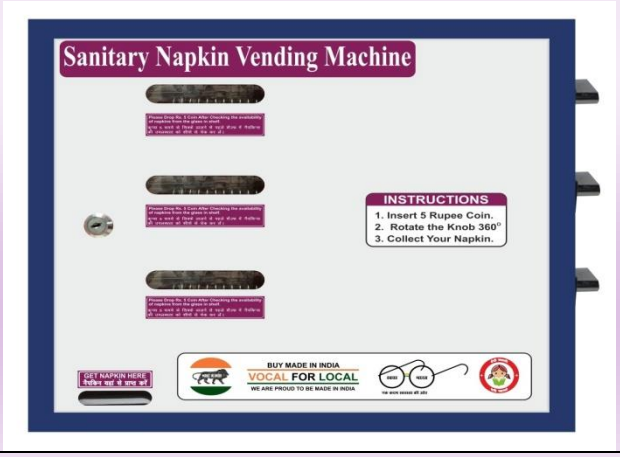 	NAPKIN CAPACITY: 100 Nos. WITH 5 Rs. COIN ACCEPTABLE MOUNTING : WALL MOUNTED DIMENSIONS : 27”x6”x25”(L X B X H)
AUTOMATIC SANITARY NAPKIN VENDING MACHIINE		
	A 50H2 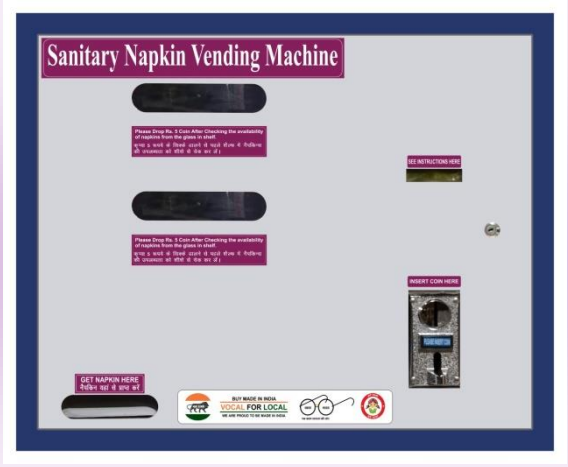 	NAPKIN CAPACITY: 50 Nos. POWER BACKUP : 6 HRS. POWERINDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS : 24.5” X 6.5” X 20” (L X B X H)

	A 100H3 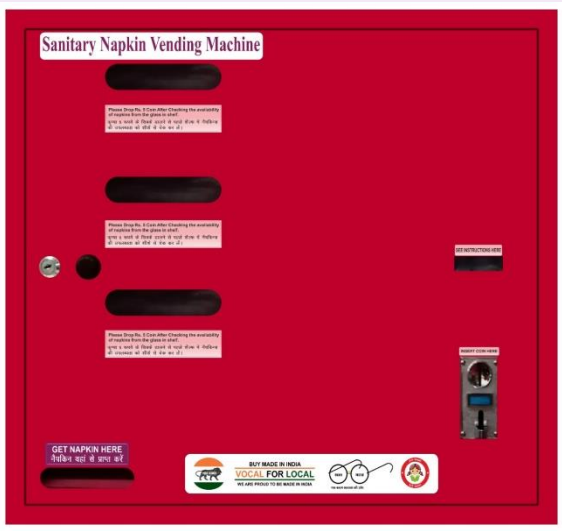 	NAPKIN CAPACITY: 100 Nos. POWER BACKUP : 6 HRS. POWER INDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS : 29” X 6.5” X 27” (L X B X H)
	A-50V2/A-100V2 	NAPKIN CAPACITY: 50 Nos. POWER BACKUP : 6 HRS. POWERINDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS : 28” X 5” X 16” (L X B X H) NAPKIN CAPACITY: 100 Nos. POWER BACKUP : 6 HRS. POWERINDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS :
	A 25 FREE VEND 	PUSH BUTTON VENDING MACHINE NAPKIN CAPACITY : 25 Nos. MOUNTING : WALL MOUNTED

	A 50 FREE VEND 	NAPKIN CAPACITY: 50 Nos. POWER BACKUP : 6 HRS. POWERINDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS : 24.5” X 6.5” X 20” (L X B X H)
	A 100 FREE VEND 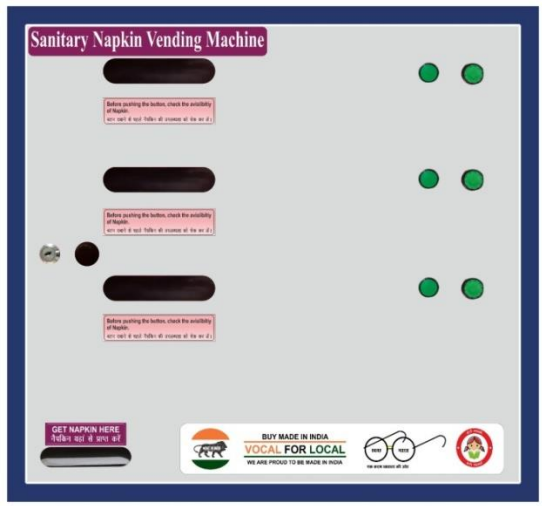 	NAPKIN CAPACITY: 100 Nos. PUSH BUTTON VENDING MACHINE WEIGHT : 22 Kg. APPROX POWER BACKUP : 6 HRS. POWERINDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS : 29” X 6.5” X 27” (L X B X H)
	A 50 V1 	**PUSH BUTTON VENDING MACHINE** NAPKIN CAPACITY: 50 Nos. POWER BACKUP : 6 HRS. POWERINDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS : 25” X 6” X 35” (L X B X H) **NAPKIN CAPACITY: 50 Nos.** **WITH 5 Rs. COIN ACCEPTABLE** POWER BACKUP : 6 HRS. POWERINDICATOR :READY TO USE/EMPTY PADS MOUNTING : WALL MOUNTED DIMENSIONS : 25” X 6” X 35” (L X B X H)

	FEEDBACK MACHIN 	➢ MS POWDERCOATED BODY ➢ APP BASED MONITORING ➢ WORKS ON ELECTRICITY (220v) ➢ DIMANSIONS : 8.5”X 3”X 6.5”(L X B X H)