

BOND

HIGH GLOSSY AND MATT FINISH LACQUERS

Acrylic , Epoxy, Amino, Polyurethane based water and solvent diluted lacquers for coating of metals, cement walls, cement board, RCC & wood floor coatings. This lacquers coating are formulated for waterproofing & weatherproofing, resistance to abrasion, acids, alkalis, saline weather, solvents, chemicals, mould, algae and fungus growth. It forms joint less finish coat in heavy duty coating system for metal, wood, concrete and masonry surfaces for exterior and interior use.

WHERE TO USE:- Use On wood, metal, Terrace, Appliances, Machinerics, wall, wooden and Rcc floor, Swimming pool, Electric & electronics instruments, For Paver block and Tiles.

METHOD OF USE:- (1) SURFACE PREPARATION:- Surface should be Dry, clean, even and free from dust, dirt, paint, rust, Algee, grease, soluble salt, or other contaminations and Damp free. For cleaning use hand or power tools and cleaning chemicals / paint remover and then use rust remover or sand blasting wherever required.(2)Apply putty if required (3) Apply first primer thin coat on clean & dry surface (4) Apply second & third coat on first coat (5) Stoving should be done for stoving lacquers.

BOND	LACR-01	LACR-02	LACR-03	LACNC-04	LEP-03	LEP-04	
TYPE	Acrylic Highly Glossy	Acrylic water Based clear	Acrylic glossy	Nitrocellulose -Acrylic glossy	Glossy Epoxy clear	Glossy URETHENE - Epoxy clear	
Color	Water clear & All transparent Dye color	Water clear & All transparent Dye color	Water clear & All transparent Dye color	Water clear & All transparent Dye color	St. yellowish & All transparent Dye color	WATER CLEAR transparent / Dye color	
FINISH	Glossy / Matt	Glossy / Matt	Glossy / Matt	Glossy / Matt	Glossy / Matt	Glossy / Matt	
SOLID % BY VOLUME	18+-2%	18 +-2%	18+-2%	28+-2%	28+-2%	48+-2%	
FLASH POINT	30 oC	None	30 oC	30 oC	30 oC	30 oC	
MIXING	Single pack	Single pack	Single pack	Single pack	3:1 Two pack	1:1 Two pack	
Pot life at 25 oC					1 hrs after mixing	4 hrs after mixing	
METHOD OF USE	Brush/Roller/ spray	Brush/Roller/ spray	Brush/Roller/ spray	Brush/Roller/ spray	Brush/Roller/ spray	Brush/Roller/ spray	
TOUCH DRY TIME	2-3 minutes	10-20 minutes	2-3 minutes	2-3 minutes	4-6 hours	1-2 hours	
HARD DRY TIME	Over night	Over night	Over night	Over night	Over night	Over night	
FULL CURE TIME	7 days	7 days	7 days	7 days	7 days	7 days	
COVERGE / Lit./ coat (Theoretically)	15-18 Sq. Mtr. On Smooth metal surface	15-18 Sq. Mtr. On Smooth Metal surface	15-18 Sq. Mtr. On Smooth metal surface	12-15 Sq. Mtr. On Smooth metal surface	12-15 Sq. Mtr. On Smooth metal surface	12-15 Sq. Mtr. On Smooth metal surface	
RECOAT TIME Min/Max.	1-2 hours	1-2 hours	1-2 hours	1-2 hours	1-2 hours	1-2 hours	
DFT/COAT/ LIT. IN micron	9-15 micron	10-15 micron	9-15micron	15-20 micron	15-20 micron	15-20 micron	

FLEXIBILITY	Good	Good	Good	Good	Good	Good	
UV Resistance	Excellent	Good	Excellent	Excellent	Excellent	Excellent	
THINNER	Toluene	Water 5-10 %	Toluene				
SUGGESTED PRIMER	Self prime	Self prime	Self prime	Self prime	Self prime	Self prime	
Special Uses	Sp. For Wood finishes, transparent wall coating, on China Mosaic and for floor Coatings, paver block, metal coatings, etc.	Sp. For Wood finishes, transparent wall coating, on China Mosaic and for floor Coatings, paver block, metal coatings, etc.	Sp. For Wood finishes, transparent wall coating, on China Mosaic and for floor Coatings, paver block, metal coatings, etc.	Sp. For Wood finishes wall coating, on China Mosaic and for floor Coatings, paver block, metal coatings, etc.	Sp. For Wood finishes, transparent wall coating, on China Mosaic and for floor Coatings, paver block, metal coatings, etc.	Sp. For Wood finishes, transparent wall coating, on STONE, GRENITE, PLASTICS, GLASS, China Mosaic and for floor Coatings, paver block, metal coatings, etc.	
STORAGE LIFE Months	12 Months	12 Months	6 Months	6 Months	12 Months	12 Months	
PACKING LITERS	1,5, 30 & 50 Liter in Carboys /Tin	1,5, 30 & 50 Liter In Carboys /Tin	1,5, 30 & 50 Liter in Carboys /Tin	1,5, 30 & 50 Liter in Carboys /Tin	1,5, 30 & 50 Liter in Carboys /Tin	5, 30 & 50, 200 Liter in Carboys /Tin/ Drum	


The information contain here in is reliable and accurate the best of our knowledge. Technical services will provided for guidance when required. However conditions of uses and methods of application are beyond our control, no warranty is expressed or implied.

ALSO AVAILABLE CONSTRUCTION CHEMICALS LIKE CEMENT ADDITIVES, WATERPROOFING COATINGS, WATER REPPALENTS, CHEMICALS & ABRASION RESISTANCE FLOORINGS MATERIALS, EPOXY-POLYURETHANE RESINS, GOUTING MATERIALS, ANTI CORROSIVE PAINTS, FACADE PAINTS, SEALENTS AND ADHESIVES, RETRO REINFORCING REHABILITATION MATERIALS. FOR BUILDING, BRIDGE, DAM, CANAL, TUNNEL AND MARINE STRUCTURES, ETC

MR. BOND POLYCHEM

111, Shivam Complex, Science city road, Sola, Ahmedabad-60 (Guj) India
 mail: jbond009@yahoo.co.in / info@mrbond.co.in / contact@mrbond.co.in
 web: www.mrbond.co.in / www.mrbond.org
 M-9327924007 / 9409457994 Ph: 079- 27774269

M-0 94094 57994 / 093279 24007 Ph; 079-2777 4269

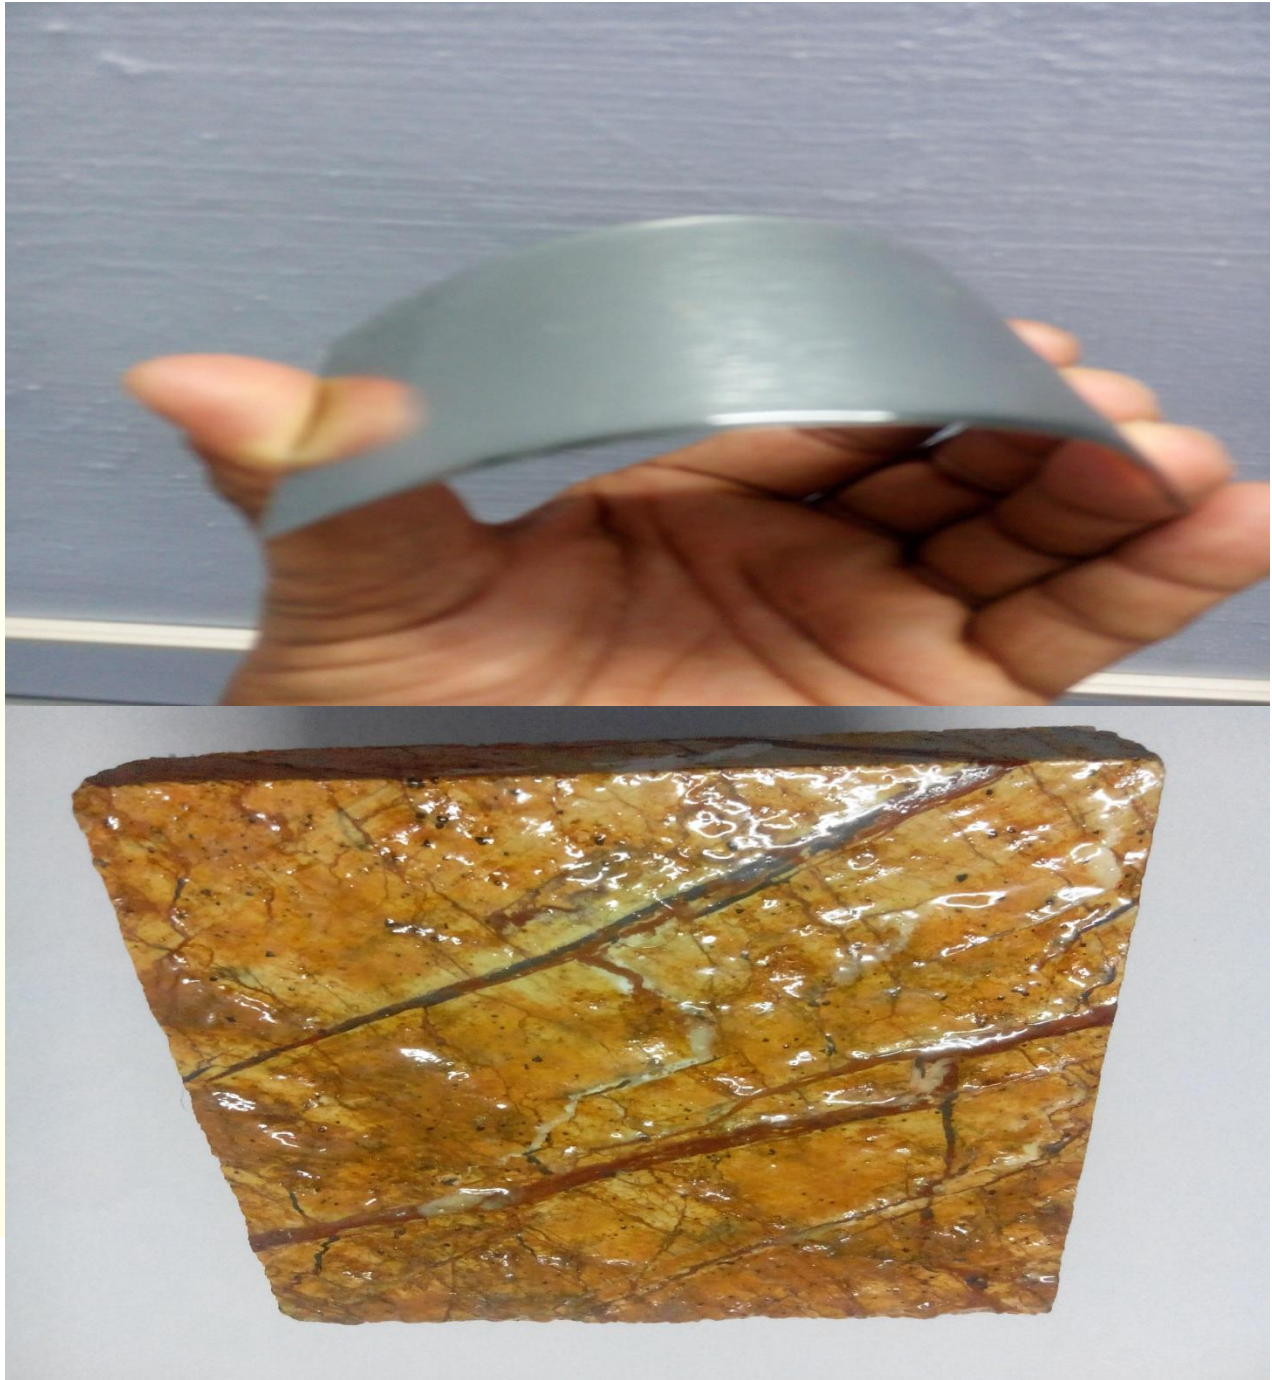





ND