

# GRAIN COLLECTOR




## TECHNICAL PARAMETERS:

Power: 170 Gasoline
Engine 4.5kw, 3600r/min
Fuel Tank: 3.6L
Starting Method: Hand Recoil
Weight: 120 kg
Productivity: 5-6 T/Hour
Max. Capacity: 60-80kgs/bag
Transmission Type: Auto Clutch + Gear Box
Rotate Speed of Spiral Propeller: 280r/min
Walking Method: Automatic
Overall Dimension: 1435*1020*1270mm

## TECHNICAL PARAMETERS:

Power: PTO Operated/ 10 H.P. Motor
Weight: 150 kg
Productivity: 4-5 Ton / Hour
Transmission Type: Pulley Belt Type
Rotate Speed of Impeller : 2400 RPM
Walking Method : Tractor Lifting Arrangement
Overall Dimension: 4.5x3.5x3.5 ft. (LxHxW)
Discharge Length : 100 ft.
Discharge Height : 25 ft.
Conveying Material : Wheat, Chana, Soyabean, Paddy, Peanut Shell Etc.
Suction / Discharge Pipe : 8 Inch / 6 Inch

# STRAW BLOWER

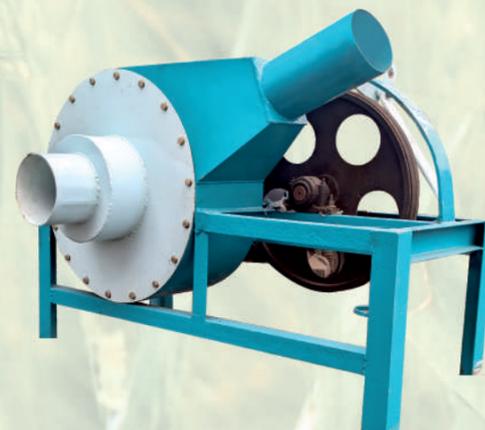

## SARTH KRISHI YANTRA PVT. LTD.

Plot No.1, Opp. Power House Sector-C, Sanwer Road, Indore (M.P.) 452015

☎ 7224094409, 8770883010 ✉ sarthkrishiantra@gmail.com 🌐 www.agrotechindore.com

📱 agrotechindore 📺 agrotechindore 📷 agro\_tech\_indore



🌐 www.agrotechindore.com



## SARTH KRISHI YANTRA PVT. LTD.

📍 Plot No.1, Opp. Power House, Sector-C, Sanwer Road, Indore (M.P.) | ☎ 8770883010, 7224094409 | ✉ sarthkrishiantra@gmail.com

# FLEXIBLE GRAIN LIFTER




**20 ft. to 35 ft.**

## FEATURES

- The conveyor is capable of lifting upto 12-15 feet height from ground.
- A faster and smarter way of material handling and movement.
- A solution to problem of labour shortage.
- Works efficiently to save time and electricity to reduce cost.
- Warranty of machine
- One time part replacement under warranty period except pvc pipe.

FLEXIBLE GRAIN LIFTER			
Sr. No.	Machine Name	LENGTH	MOTOR
1	Flexible Grain Lifter 4" Capacity 6-8 Ton Per Hour	20 FEET	2 HP SINGLE PHASE
2		25 FEET	
3		30 FEET	
4		35 FEET	3 HP SINGLE PHASE
5		50 FEET	
6		60 FEET	
7		70 FEET	7.5 HP THREE PHASE
8		80 FEET	
9		90 FEET	
10		100 FEET	10 HP THREE PHASE
Sr. No.	Machine Name	LENGTH	MOTOR
1	Flexible Grain Lifter 6" Capacity 13-15 Ton Per Hour	20 FEET	3 HP THREE PHASE
2		25 FEET	
3		30 FEET	
4		35 FEET	5 HP THREE PHASE
5		50 FEET	
6		60 FEET	
7		70 FEET	10 HP THREE PHASE
8		80 FEET	
9		90 FEET	
10		100 FEET	15 HP THREE PHASE

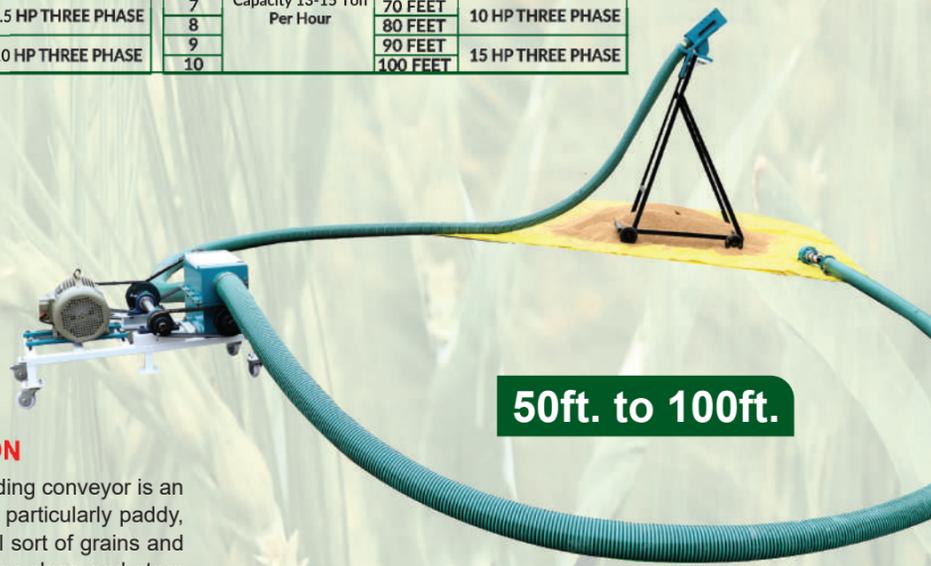

**50ft. to 100ft.**

## DESCRIPTION

Flexible grain lifter or powder loading conveyor is an equipment that moves materials, particularly paddy, immature paddy, granules and all sort of grains and powder from one place to another place and store them easily in bags and trolleys.

# GRAIN CLEANER CUM GRADER



**Capacity : 2 Ton / Hr.**  
**Weight : 360 KG.**  
**Power : 2 HP**  
**Jali : 4 Nos.**

## FEATURES

Blower	On Single shaft with Four Equipped Wings
Regulator	For Feed Rate Control
Guards	Provided for Safety at Moving Parts
Paint	All machine having anti-corrosion and 3 layer paint coated
Sheet	MS 16 & 18 gauge
Angle	ISI marked Heavy Duty
Sieve Set	Sieve Standard for paddy & wheat (other sieve available according to customer requirement, double sieving system)
Power	Operated by electrical motor & PTO
Bearing	206 Bearing , 205 Bearing, 6305, 6204



**Capacity : 4 Ton / Hr.**  
**Weight : 620 KG.**  
**Power : 3 HP**  
**Jali : 4 Nos.**  
**Elevator : 10 Ft.**