



**PRIME**<sup>®</sup>  
Pipes & Fittings

- Eco Friendly
- Non Corrosive
- Light Weight
- Smooth Flow of Water
- Easy to Install
- Cost Effective

[www.primepipes.com](http://www.primepipes.com)

**UPVC**



PRIME uPVC Plumbing Pipes and Fittings can be used in cold water Plumbing, Water Distributor Mains, Swimming Pool, Salt Water Lines, Pipes for Hand Pumps, Industrial Process Lines like Dye Houses, Plating Industry, Sugar, Paper & Breweries, Coal Washing & Ash Handling, Fluid Transportation etc.

**Standards :**

Pipes are made as per ASTM D -1785 Schedule 40 & Schedule 80

Fittings are made as per ASTM D-2467 Schedule 80

**Range:**

PRIME uPVC Pipes and fittings are available from ½” Nominal Bore to 4” Nominal Bore in standard length of 3 and 6 meters.

Standard Dimensions Details of PRIME UPVC ASTM Pipes							
Nominal Bore		Mean Outside Diameter(mm)		UPVC SCH 40 Wall Thickness		UPVC SCH 80 Wall Thickness	
Inches	MM	Min.	Max.	Min.	Max.	Min.	Max.
½"	15	21.2	21.5	2.8	3.3	3.7	4.2
¾"	20	26.6	26.8	2.9	3.4	3.9	4.4
1"	25	33.3	33.5	3.4	3.9	4.5	5.1
1 ¼"	32	42.0	42.3	3.6	4.1	4.8	5.4
1 ½"	40	48.1	48.4	3.7	4.2	5.1	5.7
2"	50	60.2	60.5	3.9	4.4	5.5	6.2
2 ½"	65	72.8	73.2	5.2	5.8	7.0	7.8
3"	80	88.7	89.1	5.5	6.1	7.6	8.5
4"	100	114.1	114.5	6.0	6.7	8.6	9.6

**Fittings**




**Features and Benefit:**

- Manufactured from environment friendly virgin High Quality UPVC ResinLead free material does not affect water quality for human health
- Does not corrode
- Good Impact resistance
- Fast and Easy installation
- Consistent and reliable jointing
- Stringent quality control
- Cost effective with very low lifetime ownership cost

**PRIME PIPES & FITTINGS PVT. LTD.**

H.O.: "DAGA ICON" C-2, Kudremukh Colony, 2nd Block Sarjapur Road, Koramangala, Bangalore-560 034

E-mail : [info@primepipes.com](mailto:info@primepipes.com) [www.primepipes.com](http://www.primepipes.com)

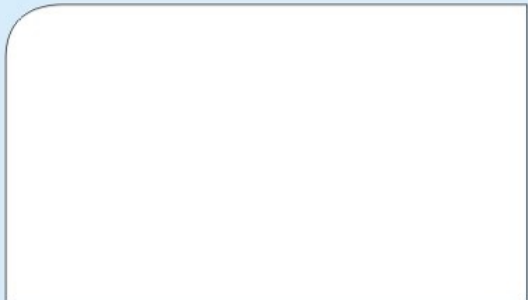

**Our Other Product Range :**

