



PNEUMATIC AND HYDRAULIC VALVE



★ INDUSTRIAL VALVES ★ INSTRUMENTS ★ PNEUMATICS ★ LEVEL INSTRUMENTS ★ AUTOMATION ★ HYDRAULICS

Pramukh Axotika Society, Bhadeli Desai, Party, Dist. Valsad, Gujarat.
Email : deshmukhviral144@gmail.com | pneumaticshydraulicvalve@gmail.com

☎ 7801978576 / 8040039334

Spare Electrical Actuator



Power Supply	: 230 Volts A/C
Rotation	: 0 - 90°
Optional	: Modulating 4 - 20 MA Input Signal & Output Signal
Limit Switch	: 1 No + 1 NC
Position Indicator	: Provided
Maximum Temp.	: -20°C + 70°C
Operating Time	: 20 To 30 Sec

Screwed end ball valve



Actuator	: Electrical
Size Range	: 1/2" to 6"
Ball Valve	: 3 Piece Design
MOC	: CF8 / CF8M / WCB C.S / PP
Ends	: Screwed / Socket Weld

3 Pc. Ball valve with Electrical Actuator



Actuator	: Electrical
Size Range	: 1/2" to 6"
Ball Valve	: 3 Piece Design
MOC	: CF8 / CF8M / WCB C.S / PP
Ends	: Screwed / Flanged Socket Weld

3 Way - 4 Way Ball valve with Electrical Actuator



Actuator	: Electrical
Size Range	: 1/2" to 4"
Ways	: 3 Way / 4 Way
MOC	: CF8 / CF8M / WCB C.S / PP
Ends	: Screwed / Flanged Socket Weld

Butterfly Valve with Electrical Actuator



Actuator	: Electrical
Size Range	: 1.1/2" to 20"
Valve Body	: Cast Iron
Disc	: SG Iron / CF8 / CF8M
Seals	: Nitrile
Pressure Rating	: PN 16 (Max.)
Oper. Temp. Range	: 80°C

Off. Set Disc Butterfly Valve with Electrical Actuator



Actuator	: Electrical
Size Range	: 1.1/2" to 12"
Valve Body	: CF8 / CF8M / WCB
Disc	: CF8 / CF8M
Seat	: PTFE Replacable / GFT
Mounting	: Universal
Press. Rating	: ANSI 150#
Opr. Temp.	: 180°C / 220°C

Double Flange Butterfly Valve with Electrical Actuator



Actuator	: Electrical
Size Range	: 3" to 24"
Valve Body	: Cast Iron
Disc	: CF8 / CF8M
Seals	: Nitrile / EPDM / Viton
Pressure	: PN 16 (Max.)
Temp.	: 80°C

PTFE (FEP - PFA) Lined Ball Valve with Electrical Actuator



Actuator	: Electrical
Size Range	: 1/2" to 8"
Valve Body	: CF8 / CF8M / WCB
Line	: FEP / PFA
Seals	: PTFE / GFT
Pressure	: 150#
Temp.	: FEP 180°C PFA 230°C

2/2 & 3/2 Way High Thermic Fluid Control Valve



Operation	: Electrical
Type	: Diaphragm Type Thermic Fluid Control Valve
Size Range	: 1" to 8"
Body & End Piece	: WCB / S.S.
Diaphragm	: Nitrile Canvas Moulded
Diaphragm Cover	: Sheet, Metal, Pressing
Working Press.	: 150#
Working Temp.	: Upto 450 °C
Seating	: Metal to Metal
Media	: Thermic Fluid

Lug Type Knife Edge Gate Valve



Operation	: Electrical
Size Range	: 2" to 20"
Valve Body	: CI / CS / CF8 / CF8M
Seals	: AISI SS 304 / 316
Gland Packing	: Metal to Metal / NRV
Leakage Class	: Cotton Graphite Rope
Ends	: IV to V

3 Pc. Ball valve with Pneumatic Rotary Actuator



Actuator : Single / Double Acting
 Size Range : 1/2" to 12"
 Ball Valve : 3 Piece Design
 MOC : CF8 / CF8M / WCB
 C.S / PP
 Ends : Screwed / Flanged
 Socket Weld

3 Way - 4 Way Ball valve with Pneumatic Rotary Actuator



Actuator : Single / Double Acting
 Size Range : 1/2" to 6"
 Ways : 3 Way / 4 Way
 MOC : CF8 / CF8M / WCB
 C.S / PP
 Ends : Screwed / Flanged
 Socket Weld

Butterfly Valve with Pneumatic Rotary Actuator



Actuator : Single / Double Acting
 Size Range : 1.1/2" to 20"
 Valve Body : Cast Iron / Brass
 Disc : SG Iron / CF8 / CF8M
 Seals : Nitrile / EPDM / Viton
 Pressure Rating : PN 16 (Max.)
 Oper.Temp.Range : 80°C / 120°C

Off. Set Disc Butterfly Valve with Pneumatic Rotary Actuator



Actuator : Single / Double Acting
 Size Range : 1.1/2" to 12"
 Valve Body : CF8 / CF8M / WCB
 Disc : CF8 / CF8M
 Seat : PTFE Replacable / GFT
 Mounting : Universal
 Press.Rating : ANSI 150#
 Opr.Temp. : 180°C / 220°C

Aluminium Butterfly Valve with Pneumatic Rotary Actuator



Actuator : Single / Double Acting
 Size Range : 2" to 6"
 Valve Body : Aluminium
 Disc : CF8 / CF8M
 Seals : EPDM Replaceable
 Pressure : 10 Bar
 Temperature : 100°C / 120°C

FEP Lined Butterfly Valve with Pneumatic Rotary Actuator



Actuator : Single / Double Acting
 Size Range : 1.1/2" to 14"
 Valve Body : SG Iron / CF8 / CF8M
 Disc : CF8 / CF8M
 Seals : FEP
 Pressure Rating : 7 kg/cm²
 Temperature : FEP Upto 180°C

2/2 Way Pneumatic Angle Type ON/OFF Control Valve



Type : Normally Close / Open
 Size Range : 1/2" to 3"
 Body : CF8 / CF8M
 Pneu. Press. : 3.5 to 7 Bar
 Working Press. : Upto 16 Bar
 Working Temp. : 180 °C
 Ends : Screwed / Flanged
 Media : Air, Water, Oil, Gas
 Steam & Chemicals

3/2 Way Pneumatic 42 kg Control Valve (Mixing & Diverting Valve)



Type : Normally Close / Open
 Size Range : 1/2" to 2"
 Body : CF8 / CF8M
 Pneu. Press. : 3.5 to 7 Bar
 Working Press. : Upto 42 Bar
 Working Temp. : 180 °C
 Ends : Screwed / Flanged
 Media : Air, Water, Oil, Gas
 Steam & Chemicals

2/2 & 3/2 Way High Thermic Fluid Control Valve



Operation : Diaphragm Type / Cylinder
 Type : Diaphragm Type Thermic
 Fluid Control Valve
 Size Range : 1" to 8"
 Body & End Piece : WCB / S.S.
 Diaphragm : Nitrile Canvas Moulded
 Diaphragm Cover : Sheet, Metal, Pressing
 Working Press. : 150#
 Working Temp. : Upto 450 °C
 Seating : Metal to Metal
 Media : Thermic Fluid

Lug Type Knife Edge Gate Valve



Operation : Pneumatic / Manual
 Size Range : 2" to 20"
 Valve Body : CI / CS / CF8 / CF8M
 Seals : AISI SS 304 / 316
 Gland Packing : Metal to Metal / NRV
 Leakage Class : Cotton Graphite Rope
 Ends : IV to V

Diaphragm Type Solenoid Valve



Actuator	: Diaphragm type internal pilot operated
Type	: Normally Close / Open
Size Range	: 1/2" to 2"
Body	: CF8
Diaphragm	: Nitrile
Pressure	: 0.5 to 10 Bar
Temperature	: Upto 85 °C
Ends	: Screwed / Flanged
Media	: Air, Water, Oil, Gas, Vacuum
Available Volt.	: All std. voltage available

Low Pressure Diaphragm Type Solenoid Valve



Type	: Normally Close / Open
Size Range	: 1/2" to 2"
Body	: CF8
Seals	: Nitrile
Pressure	: 0 to 5 Bar
Temperature	: Upto 85°C
Ends	: Screwed / Flanged
Media	: Hot Water, Air, Water, Oil, Gas, Vacuum
Available Volt.	: All std. voltage available

2/2 Way Brass Solenoid Valve



Body	: Forged Brass
Pressure	: 0.5 to 10 Bar
Temperature	: -10 to 90°C
Diaphragm	: Nitrile, Viton, EPDM
Media	: Air, Water, Oil, Gas
Opet. Voltage	: All std. voltage available
End Connection	: Screwed

Pilot Operated Solenoid Valve for Steam



Type	: Normally Close / Open
Size Range	: 1/2" to 2 1/2"
Body	: CF8
Seals	: Teflon
Pressure	: 1 to 12 Bar
Temperature	: Upto 170°C
Ends	: Screwed / Flanged
Media	: Steam
Available Volt.	: All std. voltage available

Pulse Jet Solenoid Valve (Dust Collector)



Size Range	: 1" to 1 1/2"
Body	: Aluminium Die Cast
Diaphragm	: Canvas / Nitrile / PU
Press.	: 0.6 to 10 Bar
Temp.	: 80 °C / 125 °C / (Upto 125 °C on request)
Available Volt.	: All std. voltage available

Pressure Reducing Valve (PRV)



Size	: 1/2" to 2"
Ends	: Screwed / Flanged
Body	: S.S. 304 / S.S. 316
Press. Adjusting Range	: 1 ~ 6 Kg/cm ² 4 ~ 10 Kg/cm ² 20 ~ 35 Kg/cm ²
Max. Inlet Press.	: 18 Kg/cm ² , 40 Kg/cm ²
Media	: Water, Air, Gas, Oil & Steam
Temperature	: -15 °C ~ 85 °C, 220 °C

Non Return Valve (NRV)



Body	: CF8 / CF8M
Size	: 1/2" to 2"
Pressure	: Upto 3000psi
Temp.	: 125°C
Media	: Air, Gas, Water, Oil
Seat	: Nitrile / Viton

Disc Check Valve Non Slam




Size Range	: 1/2" to 8"
Body	: CF8 / CF8M
Disc	: S.S. 304 / S.S. 316
Disc Seat	: Metal to Metal / PTFE
Spring	: Standard
Max. Oper. Press.	: PN - 40
Max. Oper. Temp.	: Upto 300°C

Accessories



Electro Pneumatic Positioner



Limit Switch - Linear



3/2 Namur Solenoid Valve



Double Coil Solenoid Valve



Lubricator



Manual Override

Butterfly Valve



Operation : Lever / Gear
 Size Range : 1.1/2" to 20"
 Valve Body : Cast Iron
 Disc : SG Iron / CF8 / CF8M
 Seals : Nitrile / EPDM / Viton

Pressure Rating : PN 10 / PN 16
 Oper. Temp. Range : 80°C / 120°C

Off. Set Disc Butterfly Valve



Operation : Lever / Gear
 Size Range : 1.1/2" to 12"
 Valve Body : CF8 / CF8M / WCB
 Disc : CF8 / CF8M
 Seat : PTFE Replacable / GFT
 Mounting : Universal
 Press. Rating : ANSI 150#
 Opr. Temp. : 180°C / 220°C

Plug Valve Flanged End



Body : WCB / CF8 / CF8M
 Plug : WCB / CF8 / CF8M
 Class : 150#
 Body Press. : 30 Kg/cm²
 Seat Press. : 22 Kg/cm²
 Pneu. Press. : 7 Kg/cm²

Triple Off - Set Design Butterfly Valve



Body : CI / CS / SG Iron / CF8 / CF8M
 Bottom Cover : CI / CS / SG Iron / CF8 / CF8M
 Disc : PTFE / Nitrile / EPDM / Viton
 Seat Ring : SS 304 / SS 316
 Class : PN 10 / PN 16
 Body Press. : 15 Kg/cm² / 22 Kg/cm²
 Seat Press. : 10 Kg/cm² / 16 Kg/cm²

Safety Valve



Body : WCB / CF8 / CF8M / CI
 Bonnet : WCB / CF8 / CF8M / CI
 Cap : WCB / CF8 / CF8M / CI
 Body Press. : 1 Kg/cm² to 21 Kg/cm²
 Seat Press. : Hydrostatic Test Twice the Seat pressure
 Temperature : 425°C

Pressure Reducing Valve



Body : CI / WCB / CF8 / CF8M
 Seat Ring : 13% Cr. SS Facing (SS 304)
 Main Valve Disc : SS 304 / SS 316
 Max. Inlet Press. : 17.5 Kg/cm² @ 427°C
 Reduce Press. : 17% of the inlet press.
 to 5 PSIG
 Hydro Press. : 35 Kg/cm²

Sluice Valve / Reflux Valve / Air Valve



'Y' Type Flush Bottom Valve



Body : WCB / CF8 / CF8M
 Yoke : WCB / CF8 / CF8M
 Stem : SS 304 / SS 316
 Class : 150#
 Body Press. : 31 Kg/cm²
 Seat Press. : 22 Kg/cm²
 Pneu. Press. : 7 Kg/cm²

Stainless Steel Flanges & Fittings



Fittings

MS / SS Fittings - SCH 40 / 80 STD
 Elbow / Tee / Con Reducer / End Cap



Ball valve



MOC	: CF8 / CF8M / WCB C.S / PP
Ball	: CF8 / CF8M / CF3M
Mfg. Std.	: BS 5351
Size Range	: 1/2" to 12"
Ball Valve	: 2 & 3 Piece Design
Class	: 150#, 300#, 600#
Ends	: Screwed / Flanged Socket Weld

Forged Steel Ball Valve



MOC	: CF8 / CF8M / ASTM 105, F304 / F316
Ball	: CF8 / CF8M / CF3M
Mfg. Std.	: BS 5351
Size Range	: 1/2" to 2"
Ball Valve	: 3 Piece Design
Class	: 800#
Ends	: Screwed / Flanged Socket Weld

Gate Valve



Range	Size	Class
Bolted Bonnet GTV	15NB to 900NB	150# to 600#
Forged Steel GTV	6NB to 50NB	800# to 2500#
Pressure Seal GTV	50NB to 600NB	900# to 2500#

Globe Valve



Range	Size	Class
Bolted Bonnet GLV	15NB to 400NB	150# to 600#
Forged Steel GLV	6NB to 50NB	800# to 2500#
Pressure Seal GLV	50NB to 200NB	900# to 2500#

Non Return Valve



Range	Size	Class
Bolted Bonnet SCV	15NB to 900NB	150# to 600#
Forged Steel SCV	6NB to 50NB	800# to 2500#
Pressure Seal SCV	50NB to 600NB	900# to 2500#

Wafer Check Valve



Range	Size	Class
Bolted Bonnet CV	40NB to 1000NB	150# to 600#
Forged Steel CV	15NB to 300NB	800# to 2500#
Pressure Seal CV	50NB to 600NB	900# to 2500#

Diaphragm Valve



Product Range	Diaphragm Valve
Size	15 NB to 300 NB
Pressure Class	PN 10 to PN 16

Strainer




Range	Size	Class
'Y' Type	15NB to 600NB	150# to 2500#
Basket Type	50NB to 1000NB	150#

PTFE Lined Valves



Aluminum Pneumatic Cylinder Single / Double Acting

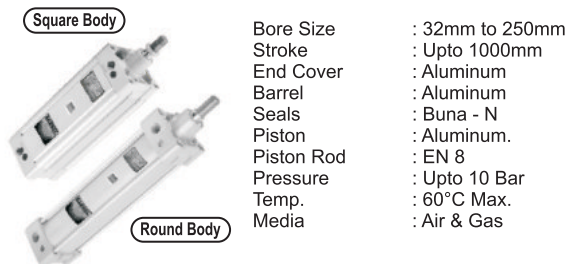

Bore Size	: 32mm to 250mm
Stroke	: Upto 1000mm
End Cover	: Aluminum
Barrel	: Aluminum
Seals	: Buna - N
Piston	: Aluminum.
Piston Rod	: EN 8
Pressure	: Upto 10 Bar
Temp.	: 60°C Max.
Media	: Air & Gas

Heavy Duty Pneumatic Cylinder Single / Double Acting



Bore Size	: 40mm to 450mm
Stroke	: Upto 3000mm
End Cover	: C.I.
Barrel	: S.Steel
Seals	: Buna - N
Piston	: C.I. / M.S.
Piston Rod	: EN 8 / 25 micron
Pressure	: Upto 12 Bar
Temp.	: 85 °C Max.
Media	: Air & Gas

Compact & Round Body Pneumatic Cylinder



End Cover	: Aluminum
	: LM-2 / ALSI-132 Aluminum
Piston	: Aluminum
	: LM-2 / ALSI-132 Aluminum
Piston Rod	: BS-970-90, EN-8
V-Seal	: PU / Nitrile Buna-N Gr. 80

Filtration



Size	: 1/4" / 1/2"
Body	: Aluminum Press. Die Cast
Bowl	: Polycarbonate with Metal Guard
Element	: 25 Micron
Oper. Press	: Upto 10 Kg/cm²

Roto Seal Coupling (Right / Left Handed Thread)




Size	: 1/4" to 2" BSP
Body	: S.Steel / WCB
Shaft	: S.Steel
Pressure	: 10 Kg/cm²
Media	: Air, Water, Oil & Gas

Auto Drain Valve



Valve Body	: IC SS 304
Off Time	: 0.5 to 45 Minutes
On Time	: 0.5 to 10 Second
Voltage	: 230 V AC

5/2 - 3/2 Way Single - Double Coil Solenoid Valve



Design	: Spool Type, Internal Pilot Operated
Pressure	: 1 to 10 Kg/cm²
Temperature	: 5 to 55°C
Leakage	: Bubble Tight
Coil Voltage	: 12V, 230V, 24V 110V

Moisture Separator



Body	: M S
Cartridge	: S.S. 316
Working Press.	: Upto 16 Bar
Testing Press.	: 24 Bar
Ends	: Screwed / Flanged
Installation	: Advisable at end use before FRL

Pneumatic Fittings



PU Pipe & Pneumatic Fittings

Gauge



Pressure Gauge - Commercial Gauge /
Total SS Gauge / Diaphragm Seal Gauge /
Temperature Gauge Dial size 1½" to 10"

PHARMA TRICLOVER BALL VALVE

MODEL	: JTBV-T
SIZE	: ½" TO 4" (15MM TO 100 MM)
BODY	: BAR STOCK 316,316L
BALL	: BAR STOCK 316,316L
SEAT	: PTFE
HANDEL	: S.S 304/ S.S 316
PRESSURE	: 20 KG
TEMPERATURE	: 250 C MAX
ENDS	: TRICLOVER
MEDIA	: SYRUP, PASTE, STEAM DISTILLED WATER



PHARMA PNEUMATIC TRICLOVER BALL VALVE

MODEL	: JATBV-T
SIZE	: ½" TO 4" (15MM TO 100 MM)
BODY	: BAR STOCK 316,316L
BALL	: BAR STOCK 316, 31L
SEAT	: PTFE
ACTUATOR	: DOUBLE/SINGLE ACTING
BRACKET PIN	: S.S 316/S.S 316L
PRESSURE	: 20 KG
TEMPERATURE	: 250 C MAX
ENDS	: TRICLOVER
MEDIA	: SYRUP, PASTE, STEAM, DISTILLED WATER



PHARMA BAR STOCK ACTUATOR BALL VALVE

MODEL	: JABV-T-S
SIZE	: ½" TO 4" (15MM TO 100MM)
BODY	: S.S 316, 316L
COVER	: S.S 316, 316L
SEAT	: PTFE
ACTUATOR	: DOUBLE/SINGLE ACTING
BRACKET PIN	: S.S 316, 316L
PNEUMATIC PRESSURE	: 3.5 TO 7 KG
LINE PRESSURE	: 20 KG
TEMPERATURE	: 250 C MAX
MEDIA	: STEAM



PHARMA DUMPING 3 WAY CONTROL VALVE

MODEL	: JDMCV-T
SIZE	: 1 AND 1.1/2" (25 MM AND 40MM)
BODY	: S.S 316,316L
TRICLOVER	: S.S 316,316L
SEAL	: VITON
SHAFTING	: S.S 304/S.S 316
GASKET	: VITON
CYLINDER	: DOUBLE ACTING
PNEUMATIC PRESSURE	: 3 TO 7 KG
LINE PRESSURE	: UPTO 10KG
TEMPERATURE	: 250 C MAX
ENDS	: TRICLOVER
MEDIA	: SYRUP, PASTE, STEAM, DISTILLED WATER



PHARMA TRICLOVER BUTTERFLY VALVE

MODEL	: JBTV-T
SIZE	: 1" TO 4" (25MM TO 100MM)
BODY	: BAR STOCK 316,316L
PIN	: BAR STOCK 316,316L
SEAL	: SILICON
HANDEL	: S.S 304/ S.S 316
PRESSURE	: 12 KG
TEMPERATURE	: 250 C MAX
ENDS	: TRICLOVER
MEDIA	: SYRUP, PASTE, STEAM, DISTILLED WATER




PHARMA PNEUMATIC TRICLOVER BUTTERFLY VALVE

MODEL	: JABTV-T
SIZE	: 1" TO 4" (25MM TO 100MM)
BODY	: BAR STOCK 316,316L
PIN	: BAR STOCK 316,316L
SEAL	: SILICON
ACTUATOR	: DOUBLE/SINGLE ACTING
PRESSURE	: 12 KG
TEMPERATURE	: 250 C MAX
ENDS	: TRICLOVER
MEDIA	: SYRUP, PASTE, STEAM, DISTILLED WATER



PHARMA SANDWICH BUTTERFLY VALVE

MODEL	: JSBV-T
SIZE	: 1" TO 4" (25MM TO 100MM)
BODY	: S.S 316,316L
FLANGE	: S.S 316,316L
SEAL	: SILICON
HANDEL	: S.S 304/ S.S 316
PRESSURE	: 10 KG
TEMPERATURE	: 150 C MAX
ENDS	: FLANGED
MEDIA	: SYRUP, PASTE, STEAM, DISTILLED WATER



PHARMA PNEUMATIC SANDWICH BUTTERFLY VALVE

MODEL	: JASBV-T
SIZE	: 1" TO 4" (25MM TO 100MM)
BODY	: S.S 316, 316L
FLANGE	: S.S 316, 316L
ACTUATOR	: DOUBLE/SINGLE ACTING
SEAL	: SILICON
HANDEL	: S.S 304/ S.S 316
PRESSURE	: 10 KG
TEMPERATURE	: 150 C MAX
ENDS	: FLANGED
MEDIA	: SYRUP, PASTE, STEAM, DISTILLED WATER



PHARMA FLUSH BOTTOM VALVE MANUAL

MODEL	: JFBV
SIZE	: 1" TO 4" (25MM TO 100M)
BODY	: S.S 304,S.S 316,S.S 316L BAR STOCK
BALL	: BAR STOCK S.S 304,S.S 316,S.S 316L
PIN COLAR	: BAR STOCK S.S 304,S.S 316,S.S 316L
SEAL	: PTFE
PRESSURE	: UPTO 20 KG
TEMPERATURE	: UPTO 250 C MAX
ENDS	: ONE SIDE 150# AND OTHER SIDE TRICLOVER
MEDIA	: SYRUP, PASTE, STEAM, DISTILLED WATER



PHARMA PNEUMATIC FLUSH BOTTOM VALVE

MODEL	: JAFBV
SIZE	: 1" TO 4" (25MM TO 100M)
BODY	: S.S 304, S.S 316,S.S 316L BAR STOCK
BALL	: BAR STOCK S.S 304, S.S 316,S.S 316L
PIN COLAR	: BAR STOCK S.S 304, S.S 316, S.S 316L
SEAL	: PTFE
ACTUATOR	: DOUBLE / SINGLE ACTING
PRESSURE	: UPTO 20 KG
TEMPERATURE	: UPTO 250 C MAX
ENDS	: ONE SIDE 150# AND OTHER SIDE TRICLOVER
MEDIA	: SYRUP, PASTE, STEM, DISTILLED WATER





ANGLE TYPE SAFETY VALVE MALE - FEMALE



ANGLE TYPE SAFETY VALVE TRICLOVER END



ANGLE TYPE SAFETY VALVE FEMALE - FEMALE



ANGLE TYPE SAFETY VALVE FLANGE END



RING TYPE SAFETY VALVE



OPEN TYPE SAFETY VALVE

GATE, GLOBE, BUTTERFLY, DIAPHRAGM VALVES & STRAINER



**GATE VALVE
SCREWED END**



**GATE VALVE
FORGED STEEL**



**GATE VALVE
FLANGE END**



**GLOBE VALVE
SCREWED END**



**GLOBE VALVE
FORGED STEEL**



**GLOBE VALVE
FLANGE END**



**BUTTERFLY VALVE
FLANGE END**



**BUTTERFLY VALVE
TRI-CLOVER END**



**BUTTERFLY VALVE
WITH SMS UNION**



**BUTTERFLY VALVE
WELDED**



**DIAPHRAGM VALVE
TRI-CLOVER END**



**ZERO DEAD VALVE
TRI-CLOVER END**



Y TYPE STRAINER



**Y TYPE STRAINER
FLANGE END**



**Y TYPE CONTROL
VALVE**



STEAM VALVE

TUBE FITTINGS & INSTRUMENTATION ITEMS



TUBE MALE CONNECTOR



TUBE FEMALE CONNECTOR



TUBE UNION & BULKHEAD UNION



TUBE MALE ELBOW



TUBE UNION ELBOW



TUBE BRANCH TEE



TUBE UNION TEE



TUBE O.D CROSS



TUBE DOUBLE FERRUL AND NUT



TUBE O.D CAP & PLUG



SYPHON COCK



SYPHON COCK 3-WAY



SYPHON-GAS COCK




SNUBBER



THERMOWELL



SYPHON TUBE U TYPE

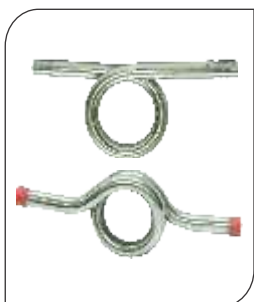

SYPHON TUBE Q & PICTAL TYPE



GAUGE GLASS COCK FLANGE END



GAUGE GLASS COCK



PRESSURE GAUGE

MEASURING INSTRUMENTS




**GLASS TUBE
ROTAMETER**




PULG ROTAMETER



METAL TUBE ROTAMETER

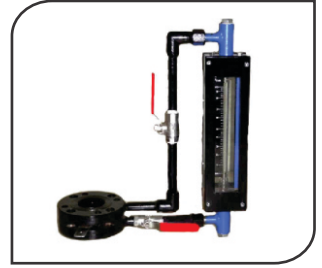


BY PASS ROTAMETER

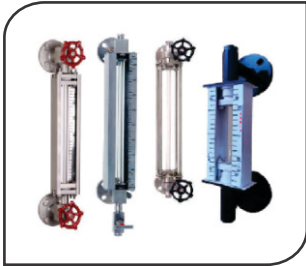

**SIDE MOUNTED
LEVEL INDICATOR**




**TOP MOUNTED
LEVEL INDICATOR**

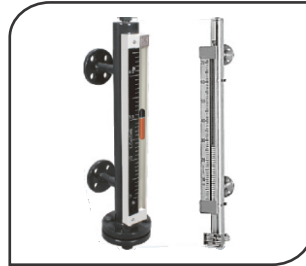


**MAGNETIC SIDE MOUNTED
LEVEL INDICATOR**




**MAGNETIC TOP MOUNTED
LEVEL INDICATOR**

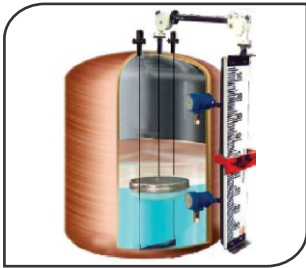

**FLOAT & BOARD
TYPE LEVEL INDICATOR**

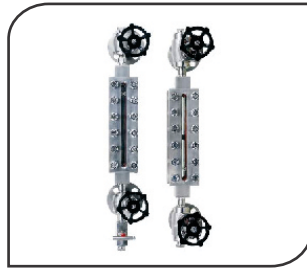

**REFLEX LEVEL
GAUGE**

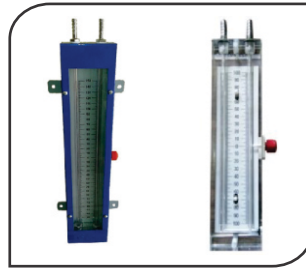

U TYPE MANOMETER



**SINGLE LIMB
TYPE MANOMETER**




**SIDE / TOP MOUNTED
MAGNETIC LEVEL SWITCH**



SIGHT GLASS



**DOUBLE WINDOW
SIGHT GLASS**

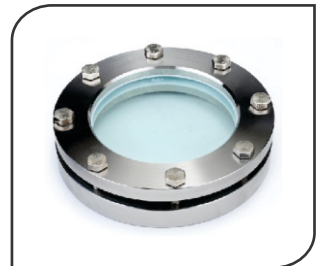

**WELD PAID
SIGHT GLASS**



**INLINE FLAME
ARRESTOR**



**END LINE FLAME
ARRESTOR**



BREATHING VALVE



FLOW METER

MEASURING INSTRUMENTS



M.S. PRESSURE GAUGE



S.S. PRESSURE GAUGE



BCPM PRESSURE GAUGE



COMPOUND PRESSURE GAUGE



VACUUM PRESSURE GAUGE



DIAPHRAGM PRESSURE GAUGE



DIAPHRAGM PRESSURE GAUGE



DIAPHRAGM PRESSURE GAUGE



DIGITAL PRESSURE GAUGE



CUPALERY GAUGE



TEMP. GAUGE




MAGNEHELIC GAUGE



U TYPE SYPHON TUBE



Q TYPE SYPHON TUBE



SYPHON TUBE



SYPHON COCK



S.S. TUBE FITTING



S.S. FITTING



BRASS PU FITTING



BRASS FITTING

Hydraulic Hoses & Fittings



High Pressure Ball Valve



Instrumentation Fittings



Instrumentation Valve



Pharma Industry Valves



Pressure Switches



We Cater Imported Brands For Valves

YUKEN

Parker

ROTEX
Engineering For The Future

**FORBES
MARSHALL**

JANATICS
Pneumatic



PNEUMATIC & HYDRAULIC VALVE

- ★ INDUSTRIAL VALVES
- ★ INSTRUMENTS
- ★ PNEUMATICS
- ★ LEVEL INSTRUMENTS
- ★ AUTOMATION
- ★ HYDRAULICS

