

ADITYA ENTERPRISES

PRODUCT MASTER CATALOGUE

Our latest Master Catalog has variety of different designs at affordable prices.



INDEX



- HI - TRAFFIC PLAIN SERIES (INDUSTRIAL)
- HI - TRAFFIC GOOD GRIP SERIES
- HI – TRAFFIC S&P SERIES
- HI- TRAFFIC TAC TILE SERIES
- MAX GRIP SERIES (R-10, INDUSTRIAL)
- COOL ROOF SERIES
- ENDURA DESIGNER COLLECTION SERIES
- SANDEX SERIES (FULL BODY)
- METEOR SERIES
- STEP & RAISERS SERIES
- SWIMMING POOL TILE SERIES



- SCREED
- ADHESIVES
- LEVELLING COMPOUND
- PRIMERS
- WATER PROOFERS
- GROUTING
- SEALANTS





H&R JOHNSON **ENDURA**

PRODUCT INFORMATION




ADITYA ENTERPRISES


HI – TRAFFIC

PLAIN SERIES


300X300 MM / 10, 12, 15 MM THICK

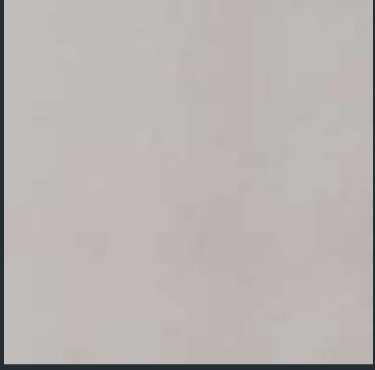

Grey Plus




Ivory Plus




Terracotta Plus

COATED SERIES

300X300 MM / 10, 12, 15 MM THICK




Coated Black



Coated Ivory



Coated Green

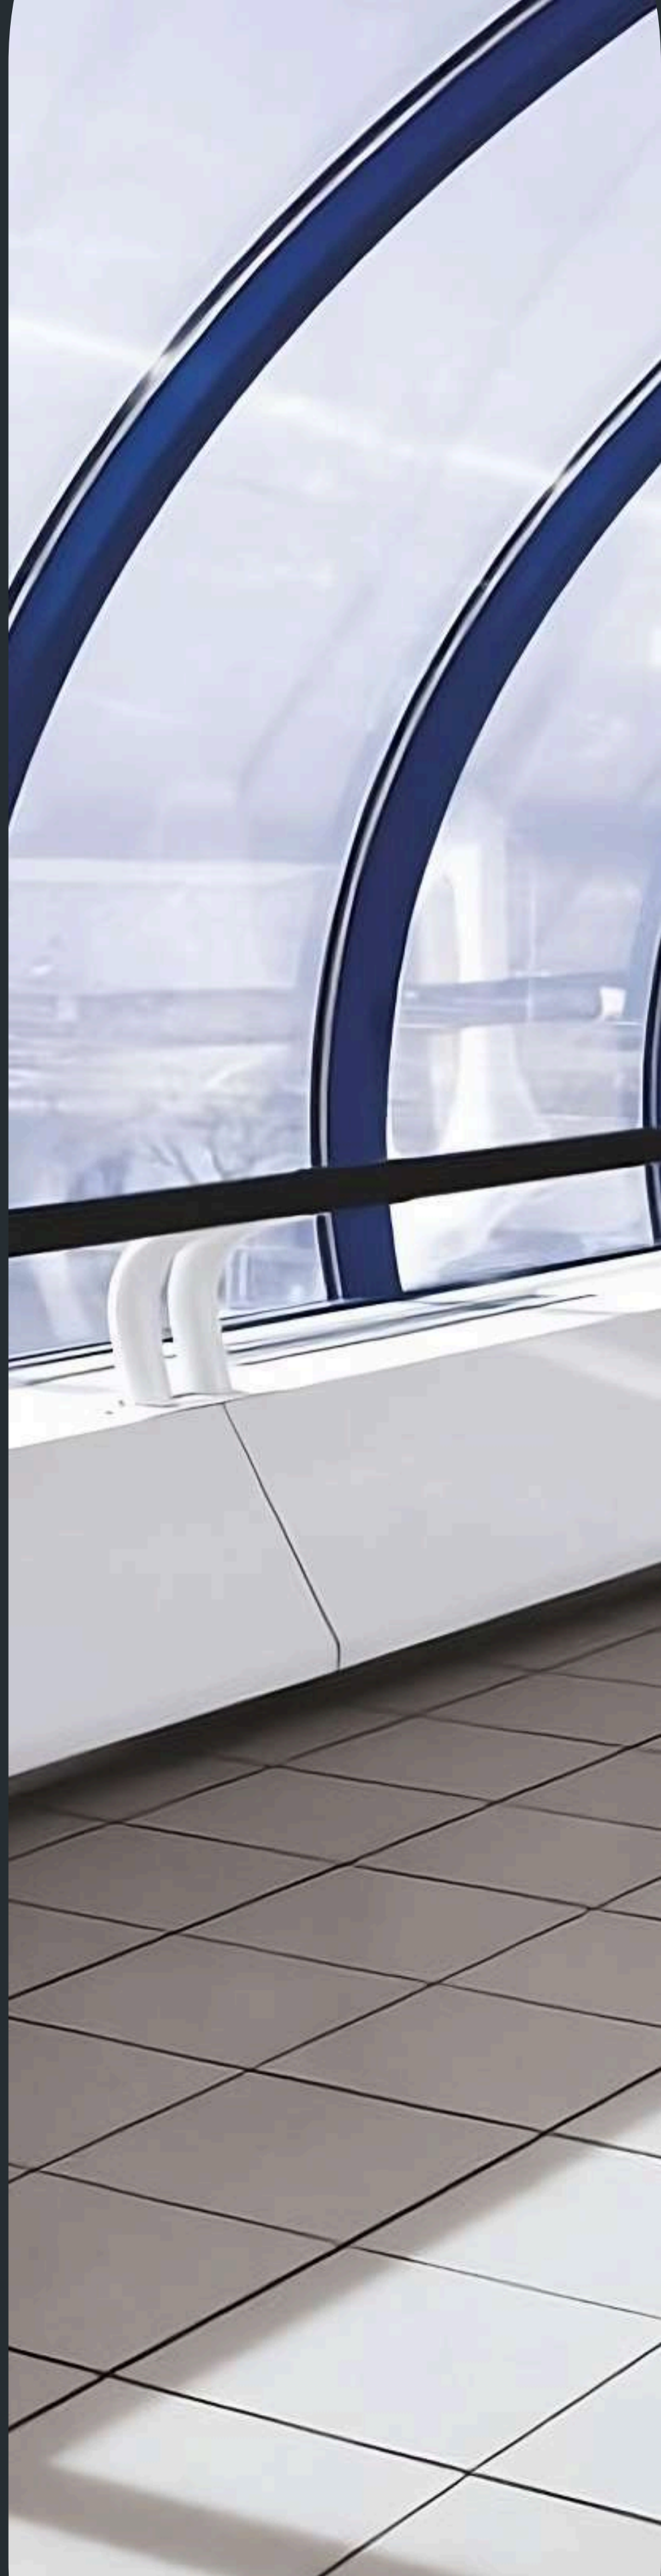


HI – TRAFFIC

CHECKERED SERIES


300X300 MM / 10 MM THICK



Ivory Plus

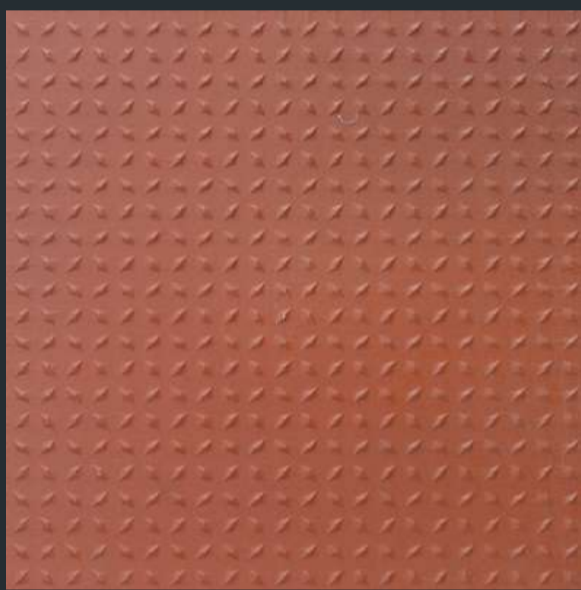

Terracotta Plus

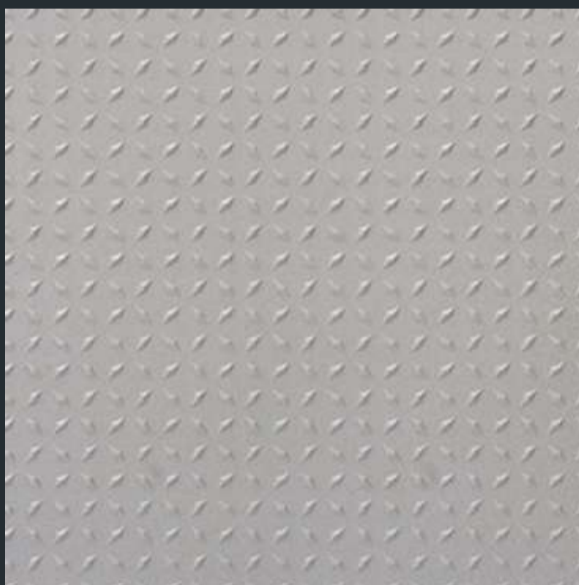

Grey Plus




HI – TRAFFIC


GOOD GRIP SERIES

300X300 MM / 10 MM THICK


POLKA DOT

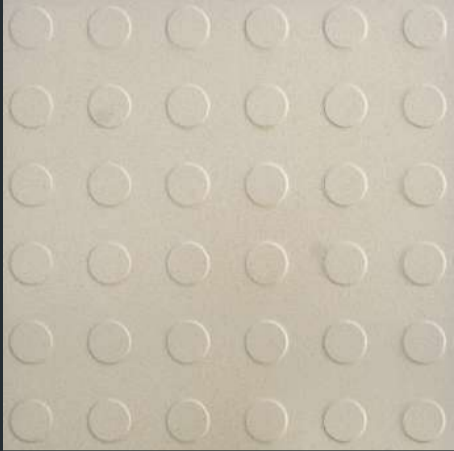

Ivory Plus

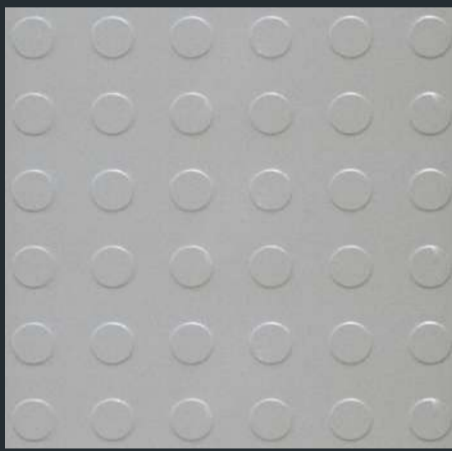


Ivory Plus

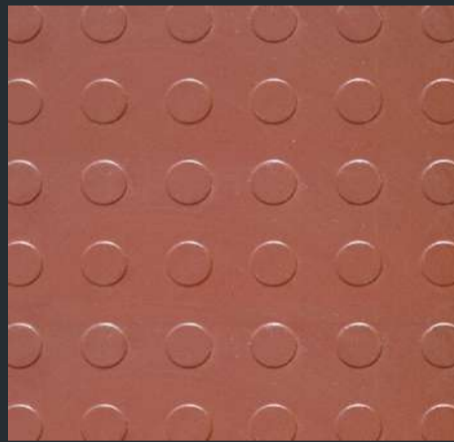


Terracotta Plus

SMALL POLKA DOT

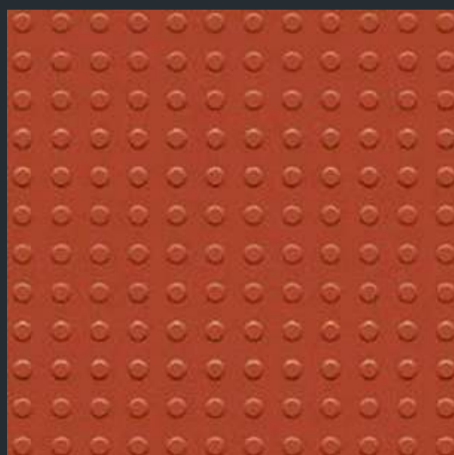

SG Terracotta Plus

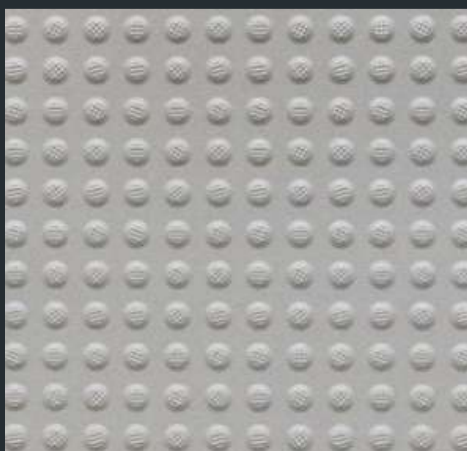

SG Ivory Plus



HI – TRAFFIC


GOOD GRIP SERIES

300X300 MM / 10 MM THICK

POLKA STRIP




Ivory Plus

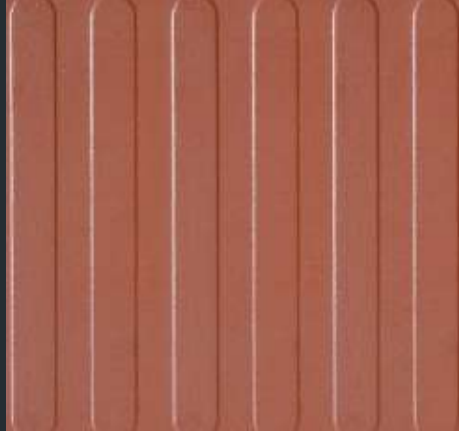

Terracotta Plus

CAPSUL

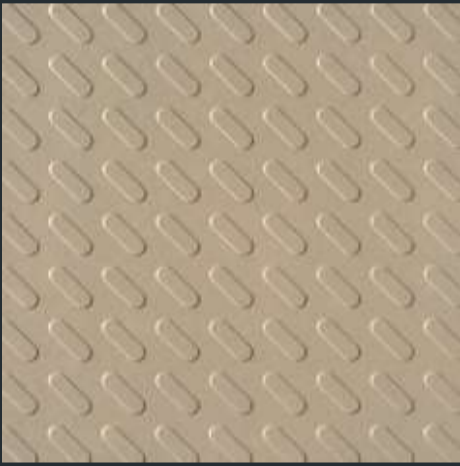

Ivory Plus



Terracotta Plus

WAVY



Ivory Plus



Terracotta Plus


DOT STRIP



Ivory Plus



Terracotta Plus

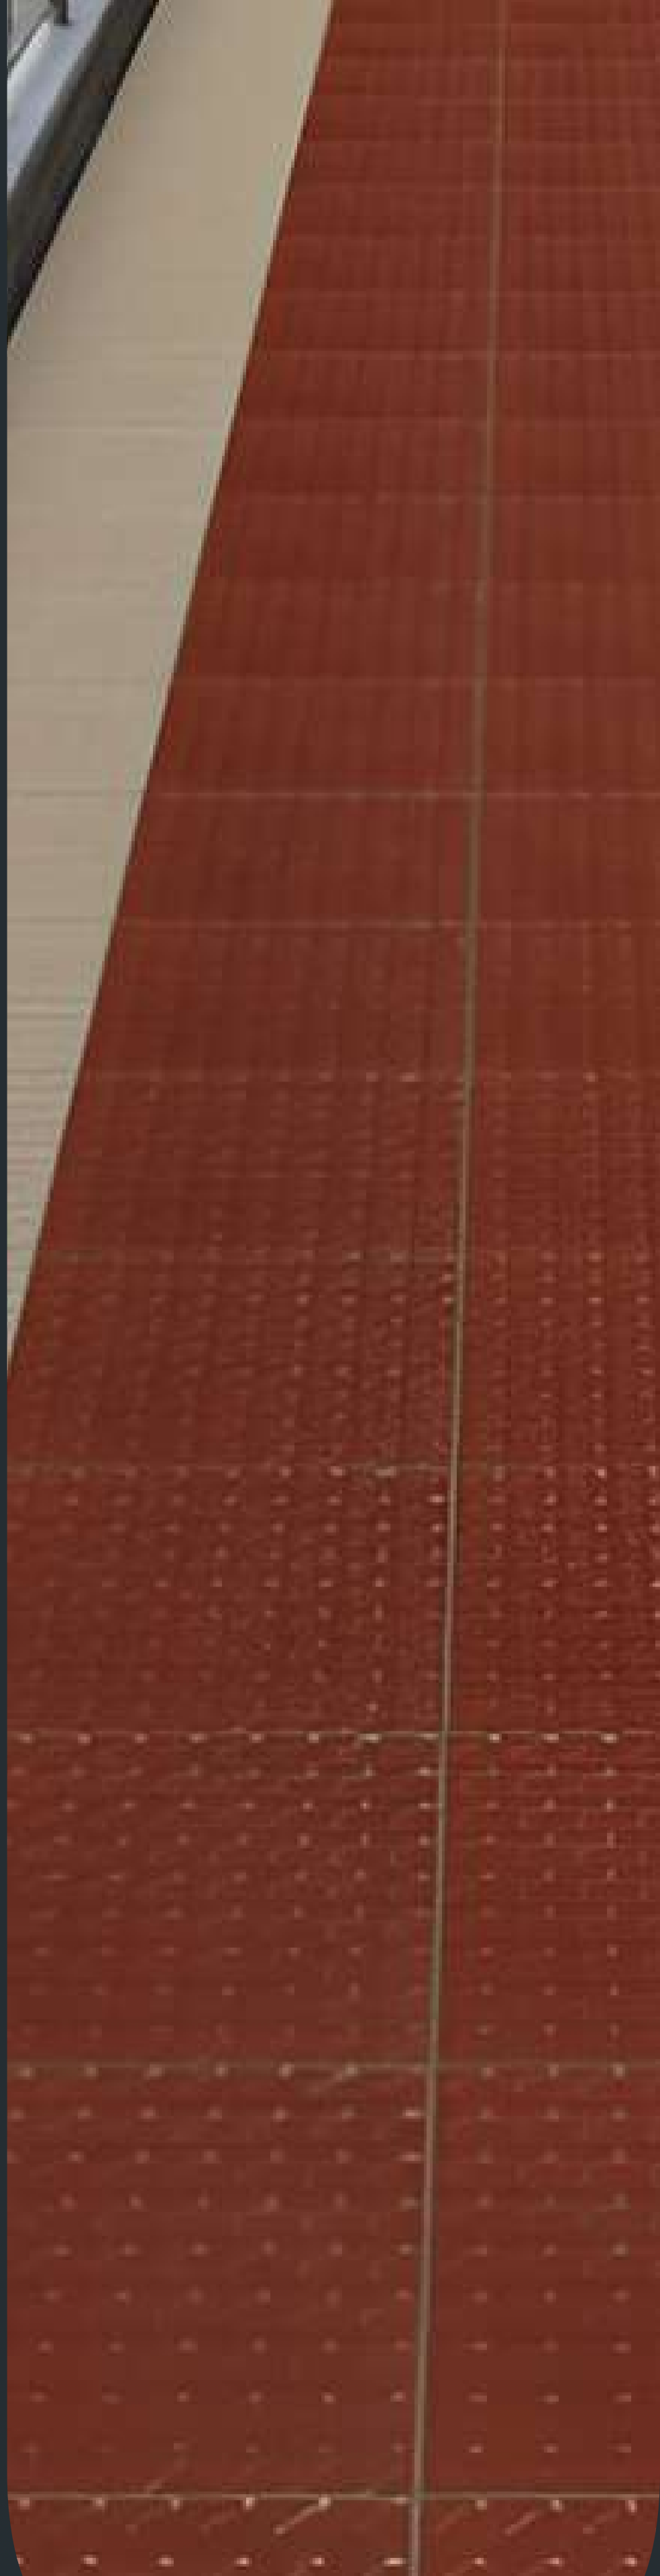

HI – TRAFFIC

S&P (PAVERS) SERIES

200X200 MM / 10 MM THICK



S&P Yellow



S&P White



S&P Ivory



S&P Black



S&P Terracotta



HI – TRAFFIC


TAC TILE SERIES

300X300 MM / 10, 15 MM THICK


TAC BOTTOM



Terracotta

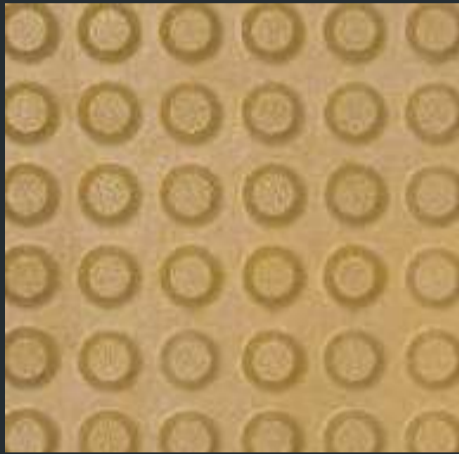


Yellow

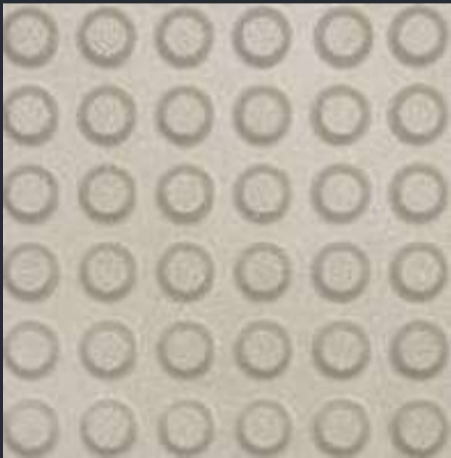

Ivory

TAC LINER

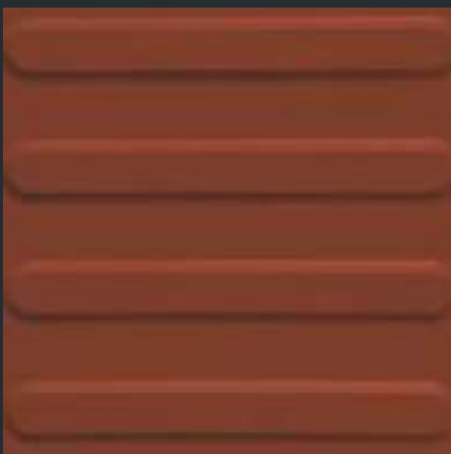


Terracotta



Yellow



Ivory

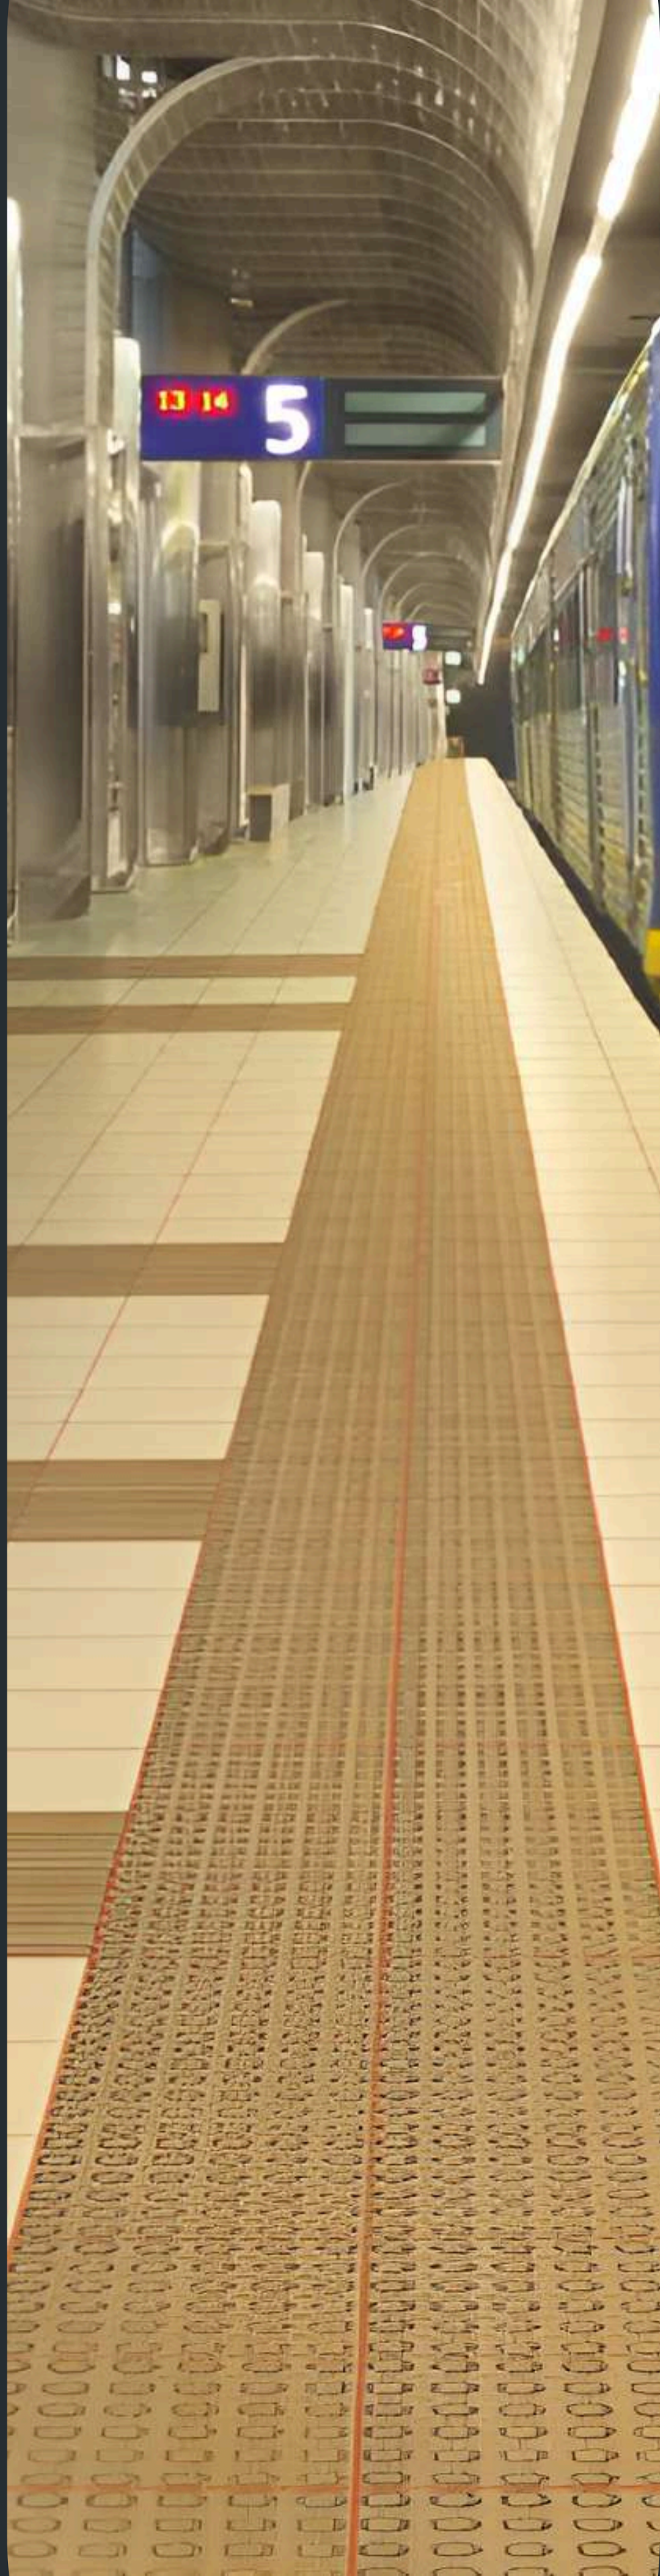

MAX - GRIP (R-10)

MAX - GRIP SERIES

600X600 MM / 10 MM THICK



Cloud Grey



Vivid Burst Beige



Vivid Spring




Cloud Nero



Crest Brown



Crest Grey

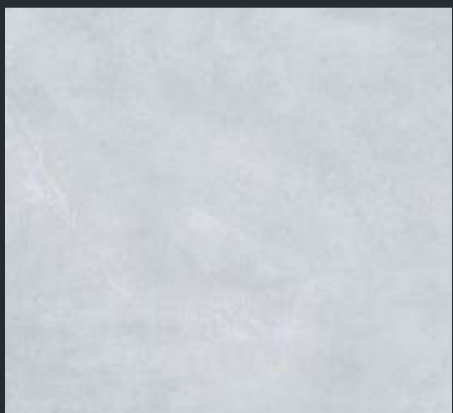

Vivid Cool Grey



COOL ROOF

COOL - ROOF SERIES

300X300 MM / 8 MM THICK


8 MM (MAKE TO ORDER).



White



Ivory

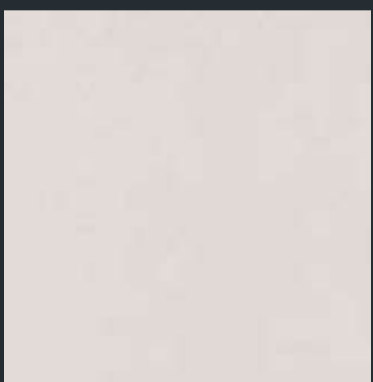


Almond


10 MM (MAKE TO ORDER).




White

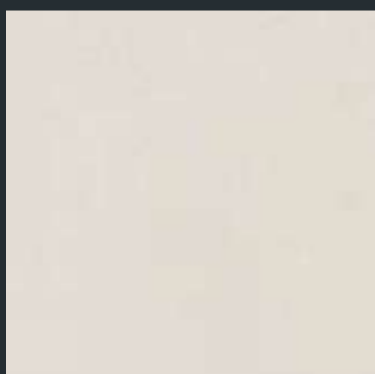

Ivory

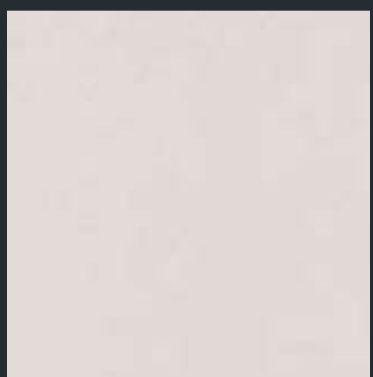


Almond

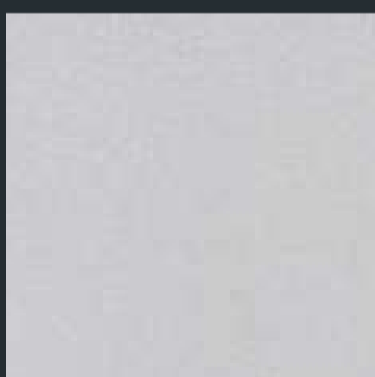


Light Grey



Pink

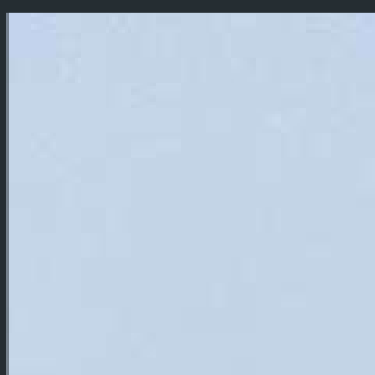


Sky Blue

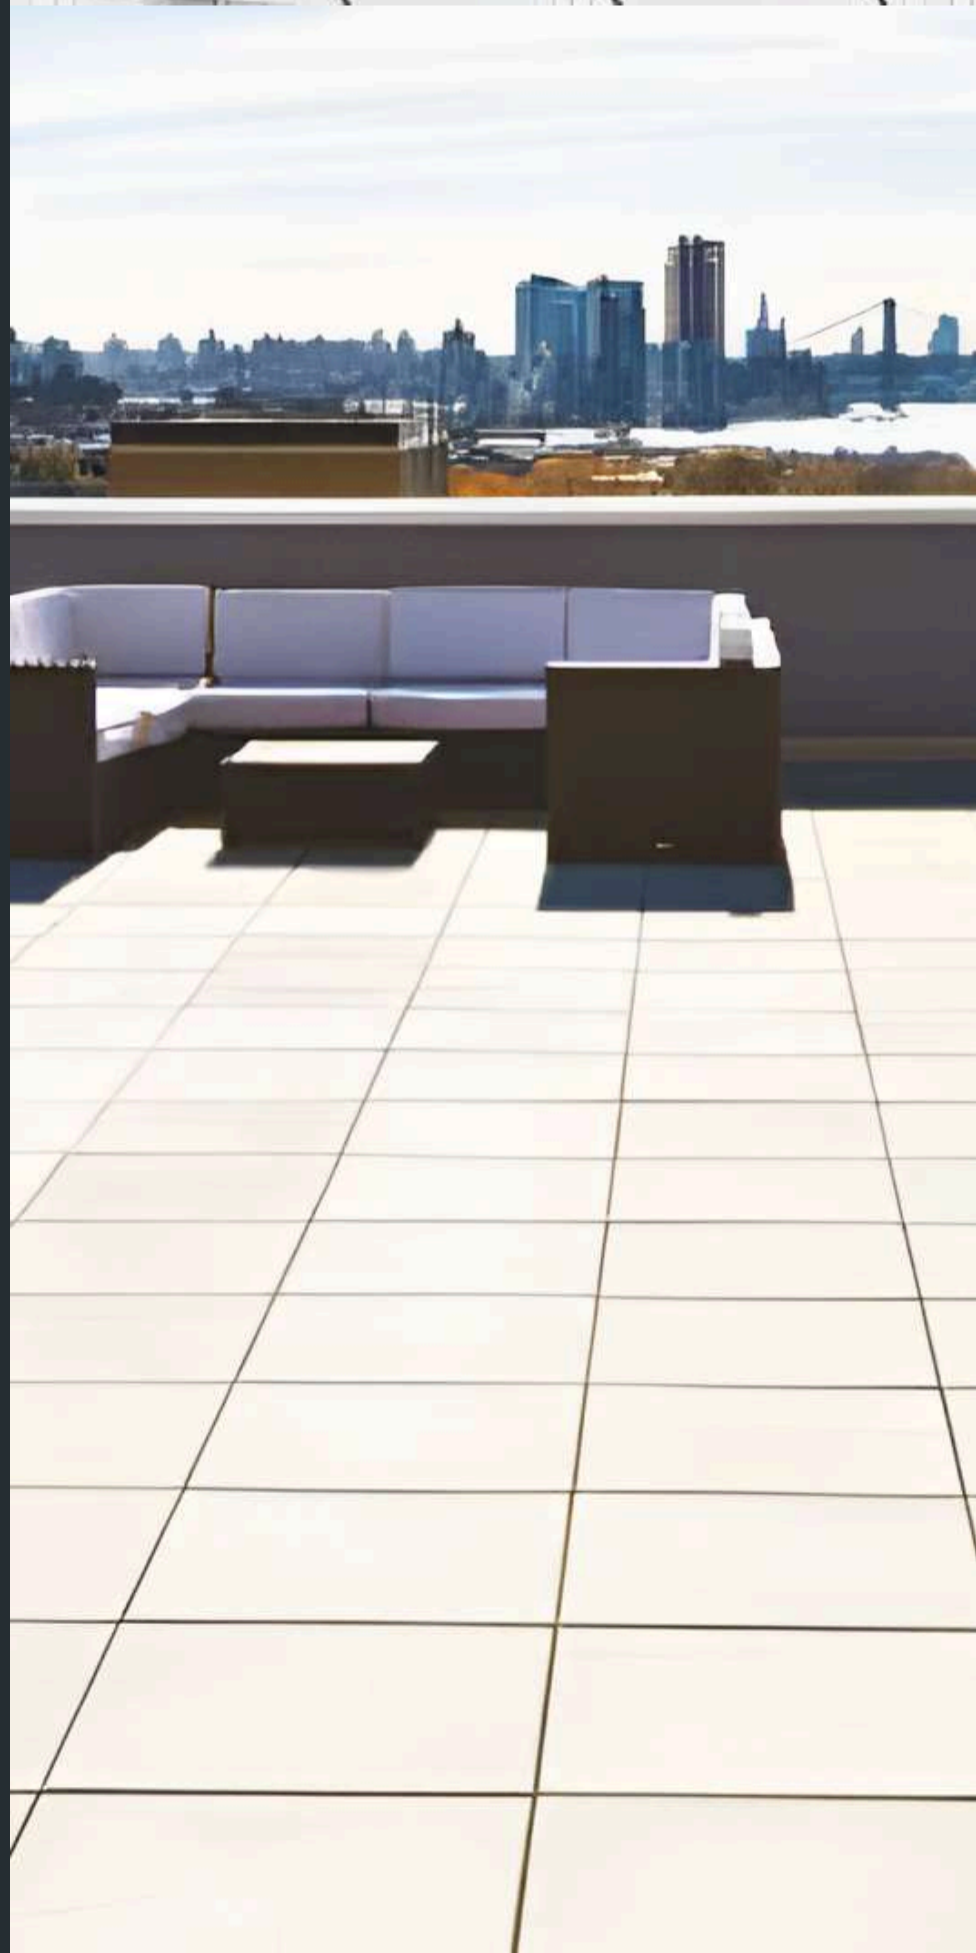


What is SRI? (COOL ROOF)

- Solar Reflectance Index (SRI) measures the surface's ability to reflect solar heat and emit infra-red heat.
- Endura Cool Roof SRI tiles reflect solar heat and emit absorbed radiation back into the atmosphere thus help keep the interiors of the building cooler.
- The U. S. Green Building Council's LEED 2.2 uses SRI as a way to evaluate the surface's capacity to reflect solar heat. The roof of the building need to have a minimum SRI value of > 78 to qualify for LEED accreditation.
- Endura Cool Roof SRI Tiles have SRI value >90 (White Colour).
- Endura Cool Roof SRI Tiles on the roof and facades of the building can reduce surface temperature upto 15 Degree Celsius.
- The effectiveness & reduction in surface temperature after installation of Johnson Endura Cool Roof tiles may vary from place to place depending on exposed ambient temperature & changing climatic conditions.

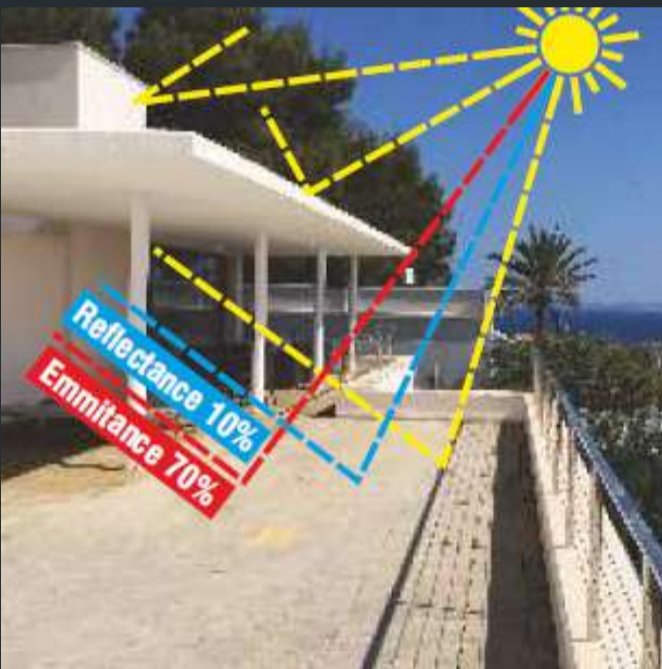

ORDINARY ROOF

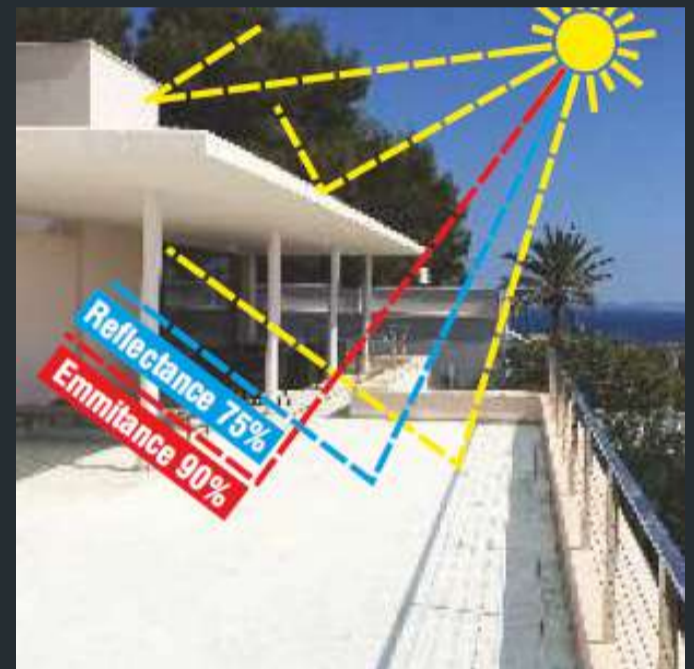

WITH ENDURA COOL ROOF (SRI)

Benefits of Endura Cool Roof SRI:

- Reduce surface temperature up to 15 Degree Celsius.
- Improve indoor comfort.
- Reduce cooling requirement and save electricity.
- Reduce conduction of heat into the building.
- Reduce the "heat island effect" in cities.
- Reduction in global warming and saving of ozone layer.
- Endura Cool Roof SRI Tiles is a sensible choice for the buildings - saving electricity and saving the environment.


ENDURA DESIGN

**ENDURA DESIGNER
COLLECTION**

400X400 MM / 12 MM THICK



Strip Charcoal

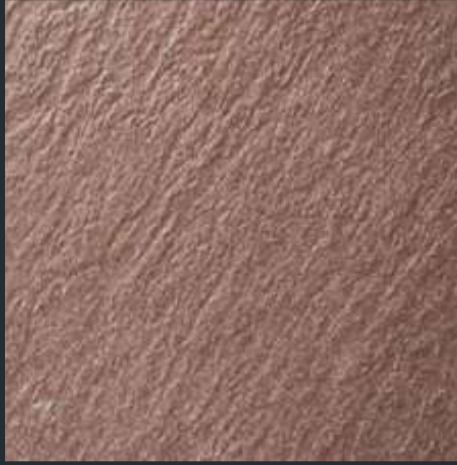

Mica Bronze



Wood Strip Choco



Stone Grey



Stone Nero



Stone Cotto



Silva Copper



Mica Slate



Mica Nero



ENDURA DESIGN

**ENDURA DESIGNER
COLLECTION**

400X400 MM / 12 MM THICK



Bradly Nero



Bradly Bronze



Strip Grey




Gr. Stone Grey



Andre Brown




Maze Wood

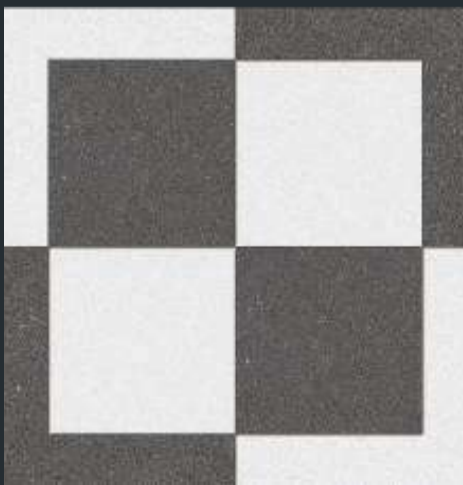

Jezza Grey



Jezza Bronze

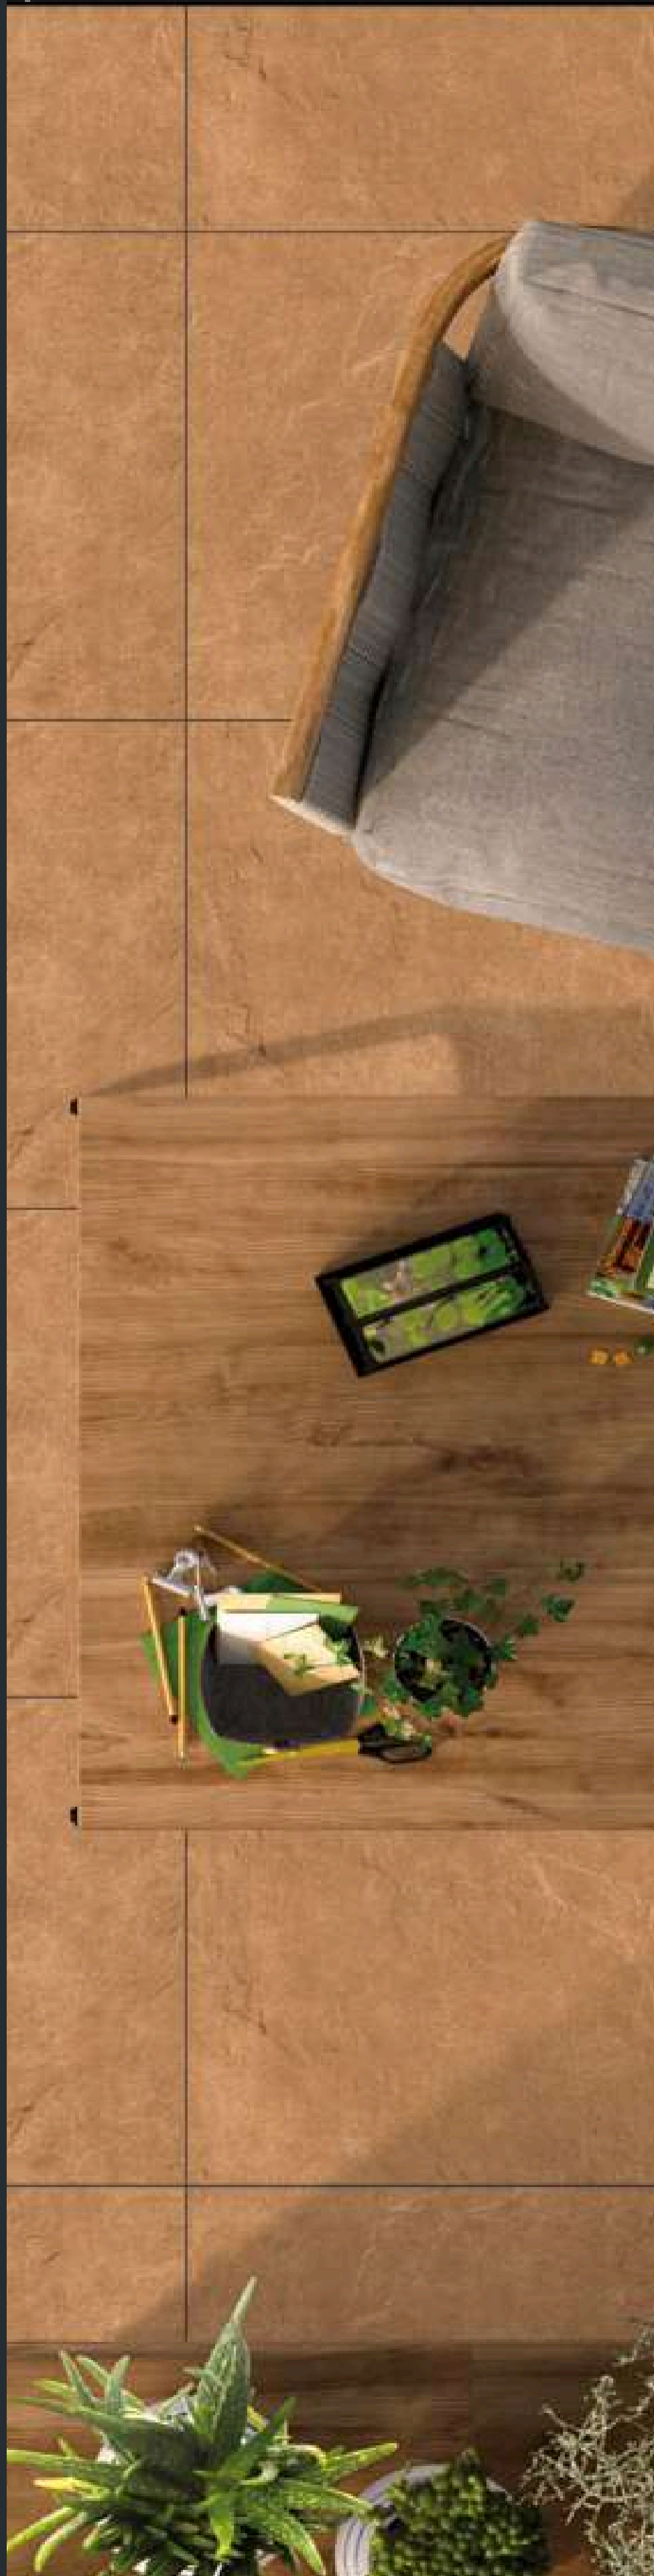


SANDEX (FULL BODY)

SANDEX COLLECTION

600X600 MM / 10 MM THICK




Ivory




Terracotta




Grey

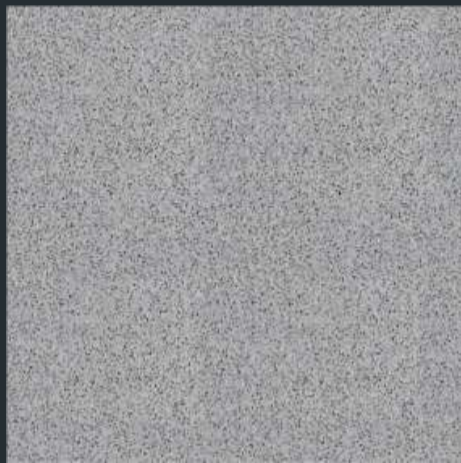

Vaga

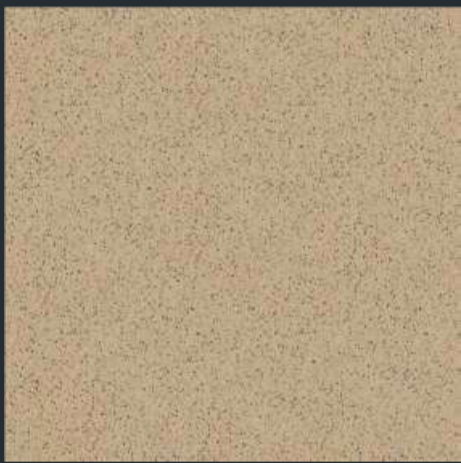

Velsao

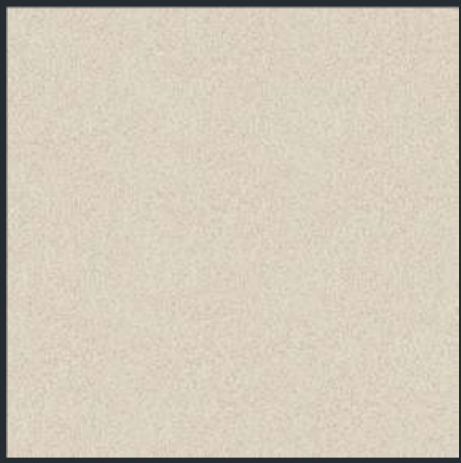


Miramar



Palolim



Candolim

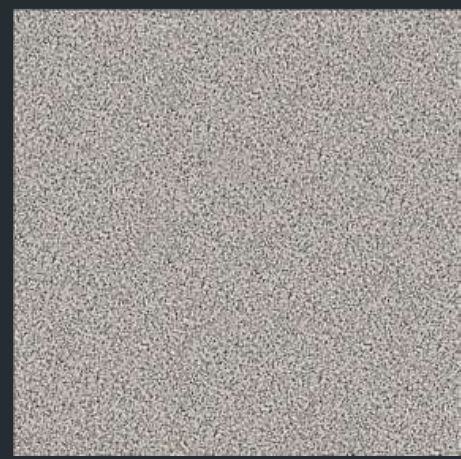

Donapoula




Colva



SANDEX (FULL BODY)

SANDEX COLLECTION

600X600 MM / 10 MM THICK

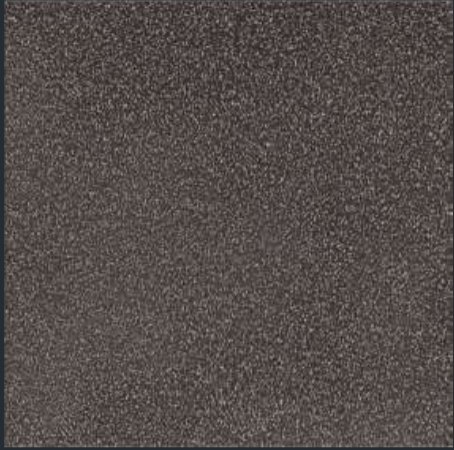


Benaulim




Gmolo



Majorda

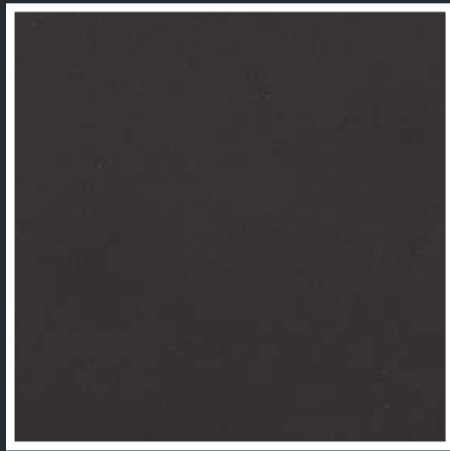

Nero Black

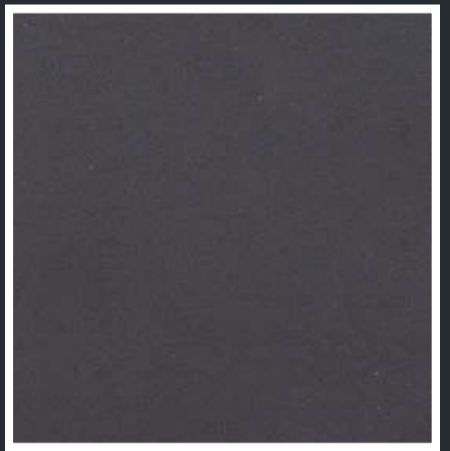

AU Black (Plus)




Charcoal Black



Coated Grey



Coated Ivory

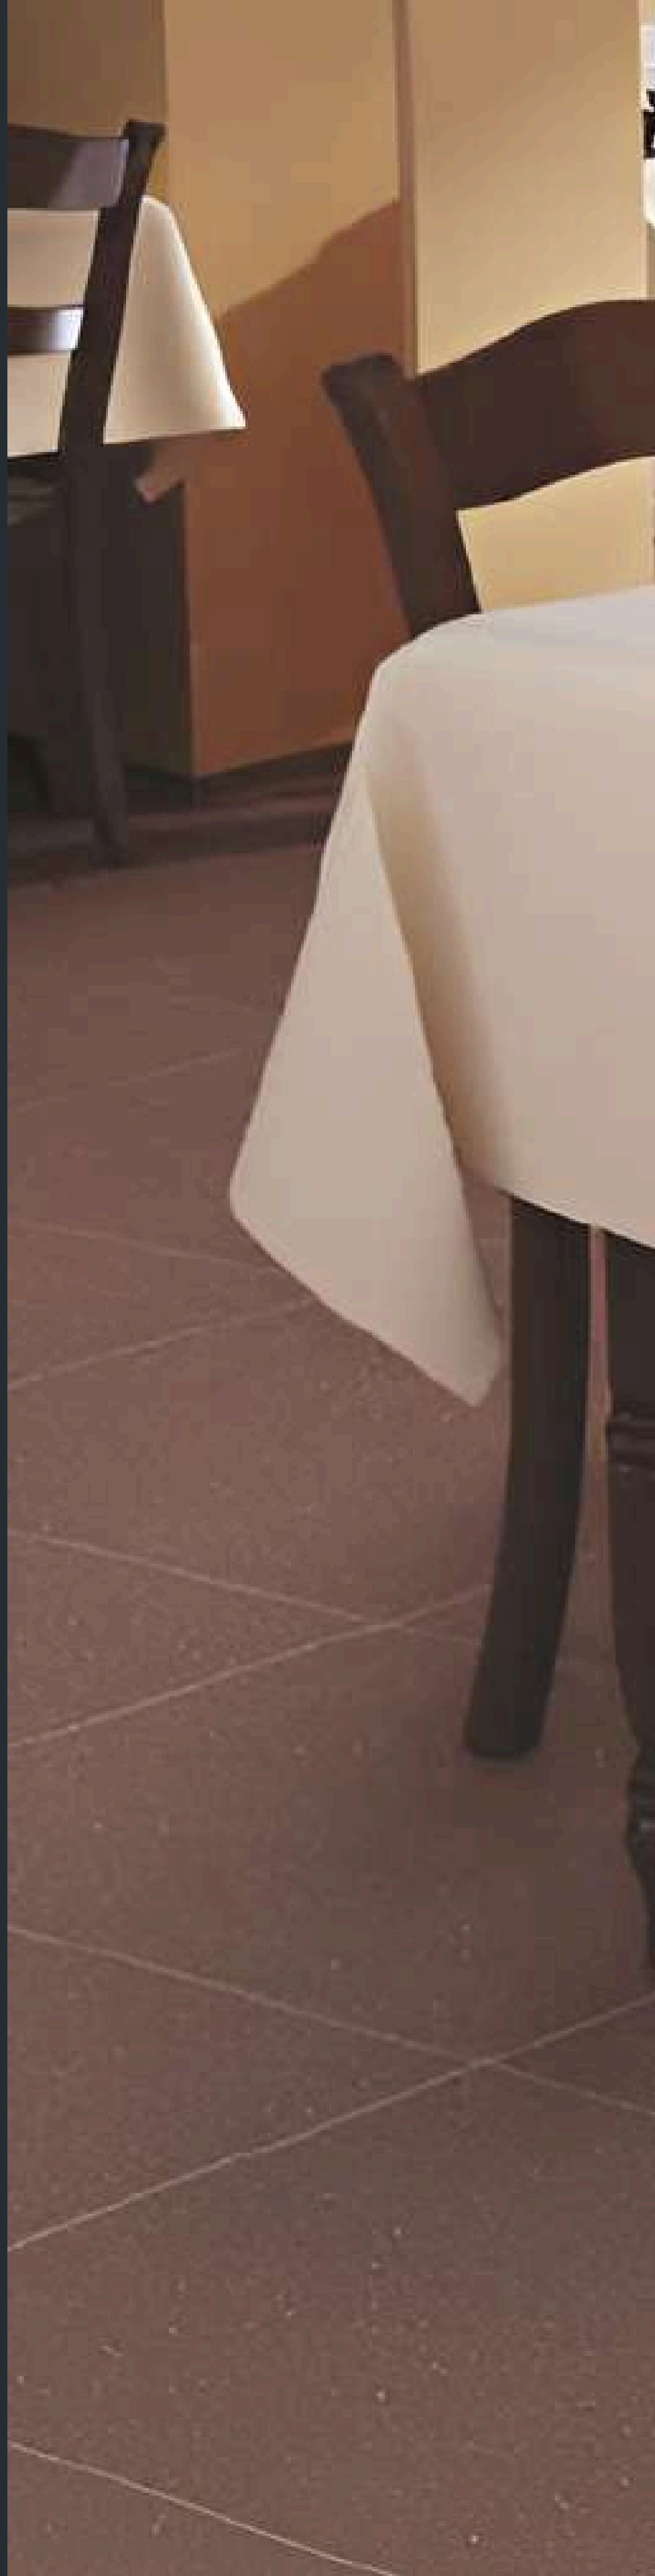

METEOR (FULL BODY)

METEOR COLLECTION


600X600 MM / 20 MM THICK




Kreo Ivory



Kreo Terracotta



Kreo Beige

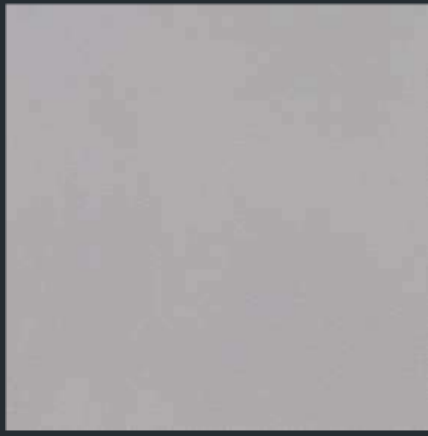

Kreo Gris



Korneto Ivory



Korneto Beige



Korneto Gris



METEOR (FULL BODY)

METEOR COLLECTION

600X600 MM / 15 MM THICK



Slate Bianco




Slate Grey



Slate Nero



Slate Kota Green

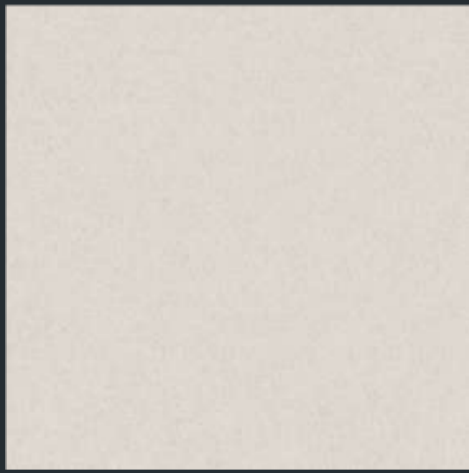

Nova Cement




Terracotta



Plain Donapoula



Plain Benaulim

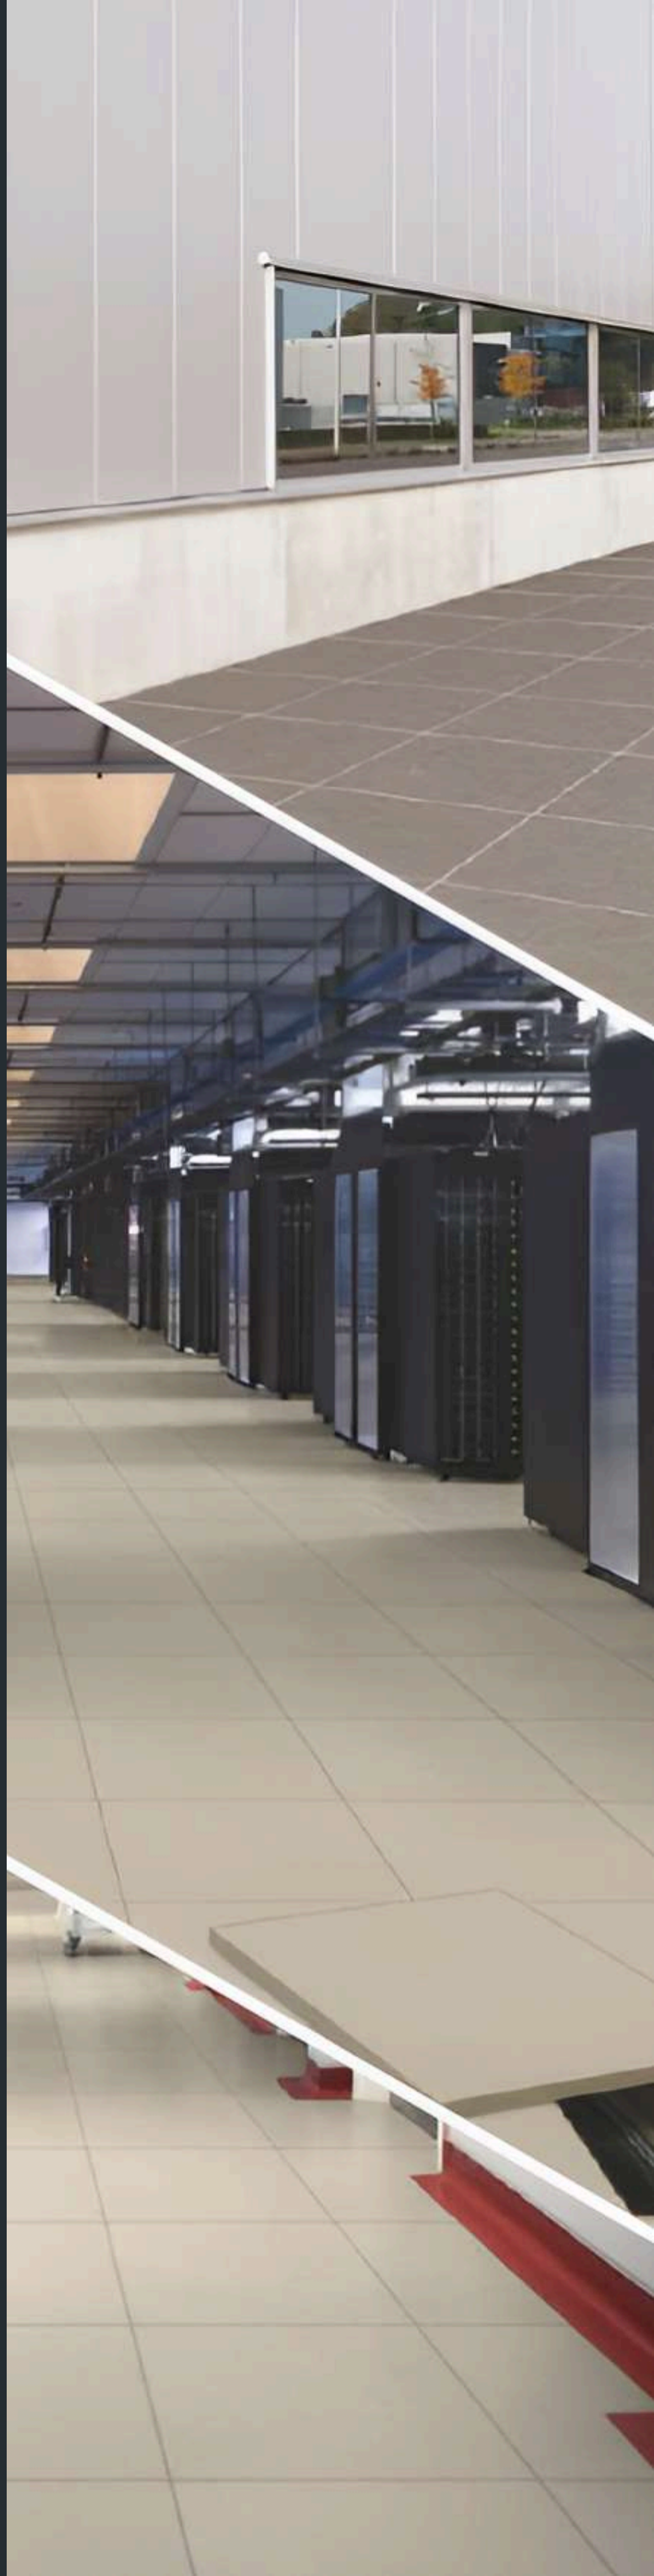

STEP TILES / RAISERS
MARBLE & GRANITE
1200X300 MM / 12 , 15 MM



Stone Bianco Marble




Stone Grey Marble




Stone Light Beige Marble



Stone Sky Marble

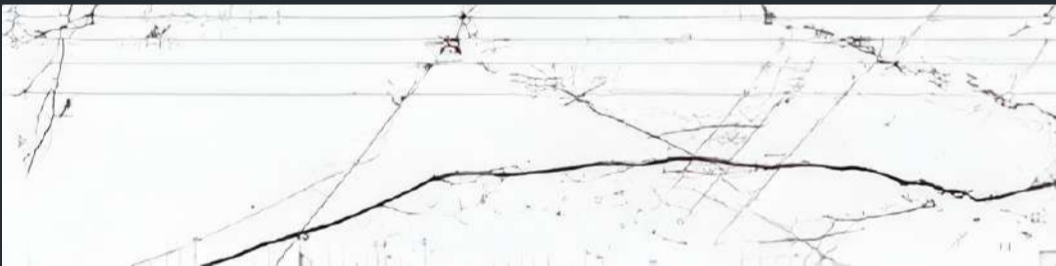

Stone Bianco Granite

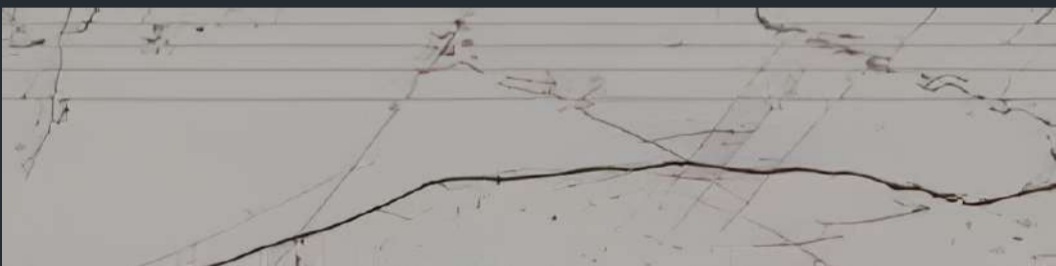

Stone Grey Granite



Stone Light Beige Granite



Stone Sky Granite



STEP TILES / RAISERS

S&P SERIES

1200X300 MM / 12 , 15 MM



S & P Coffee




S & P Dark Beige



S & P Grey



S & P Jet Black

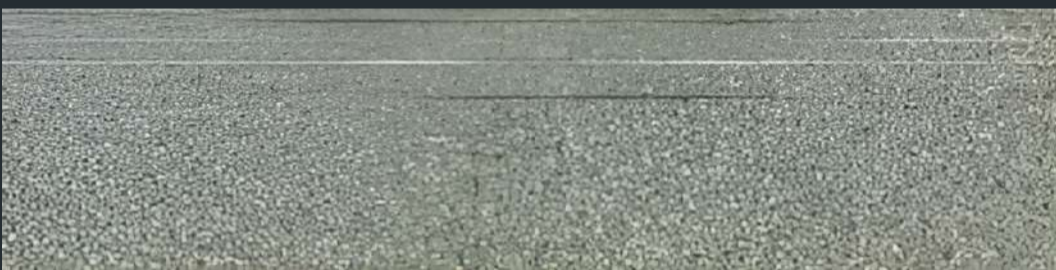

S & P Kota



S & P Light Beige



S & P Nero




S & P Sky




STEP TILES / RAISERS

PLAIN SERIES


1200X300 MM / 12 , 15 MM

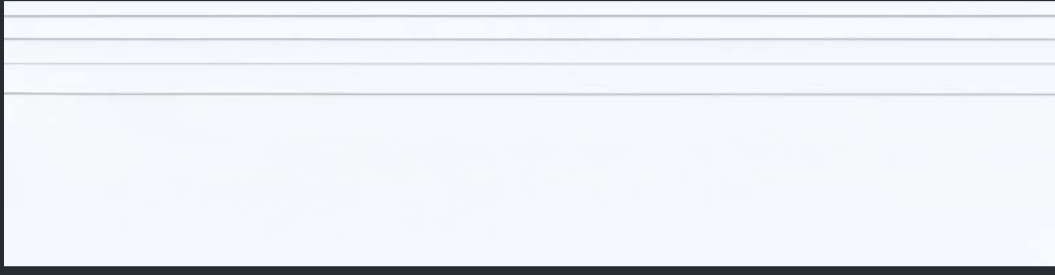


Stone Bianco

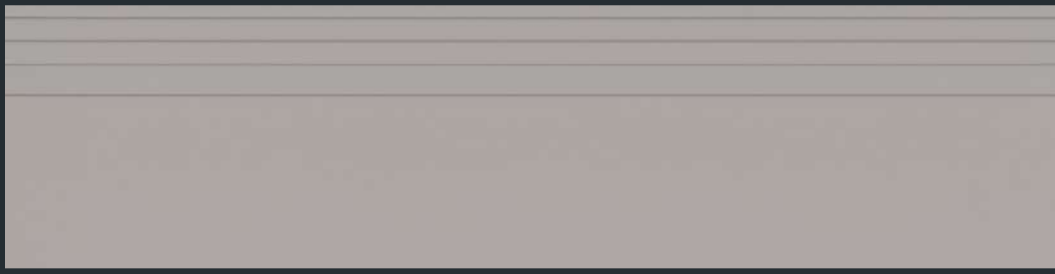


Stone Grey

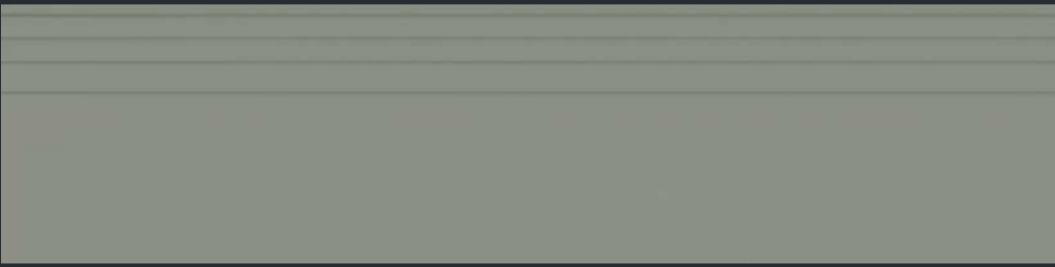


Stone Kota

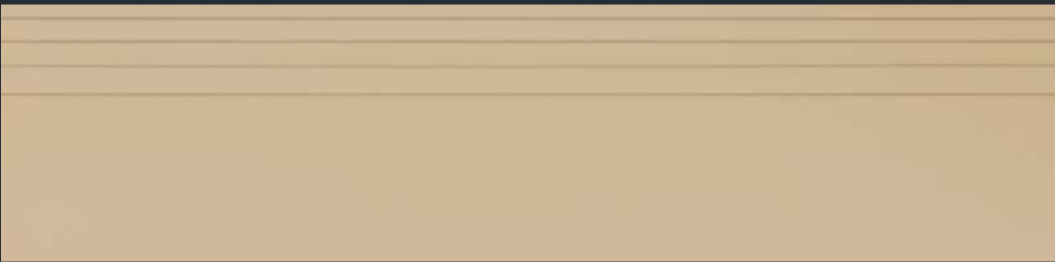

Stone Light Beige

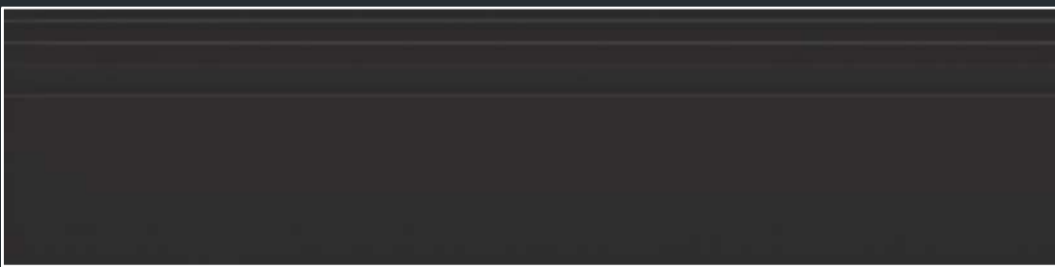

Stone Nero

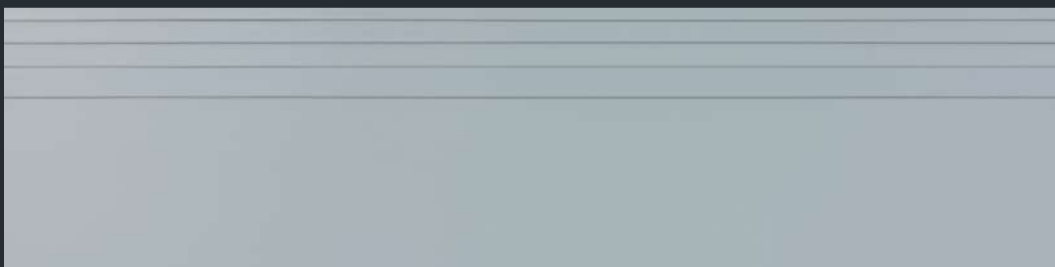

Stone Sky




STEP TILES / RAISERS


MARBLE & GRANITE
950X600 MM / 12 , 15 MM




Bianco Marble

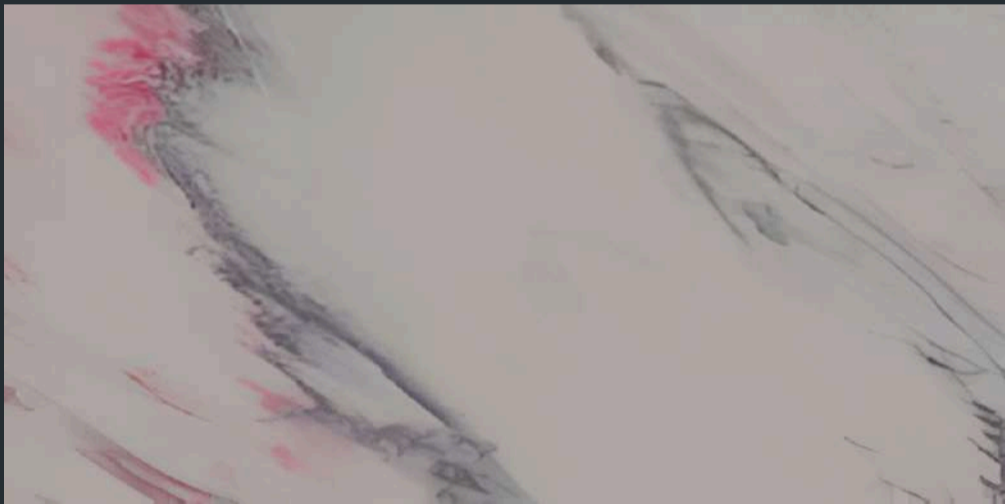


Grey Marble

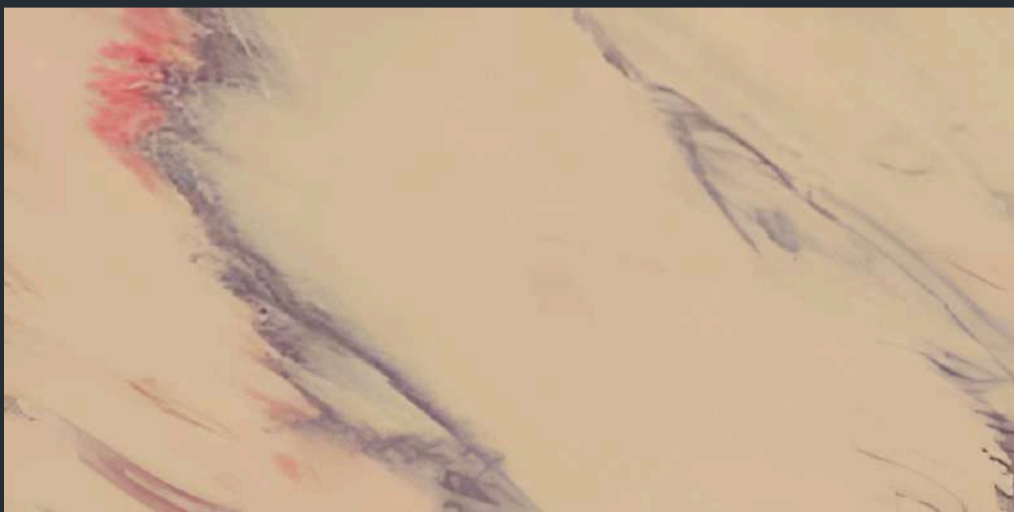

Light Beige Marble

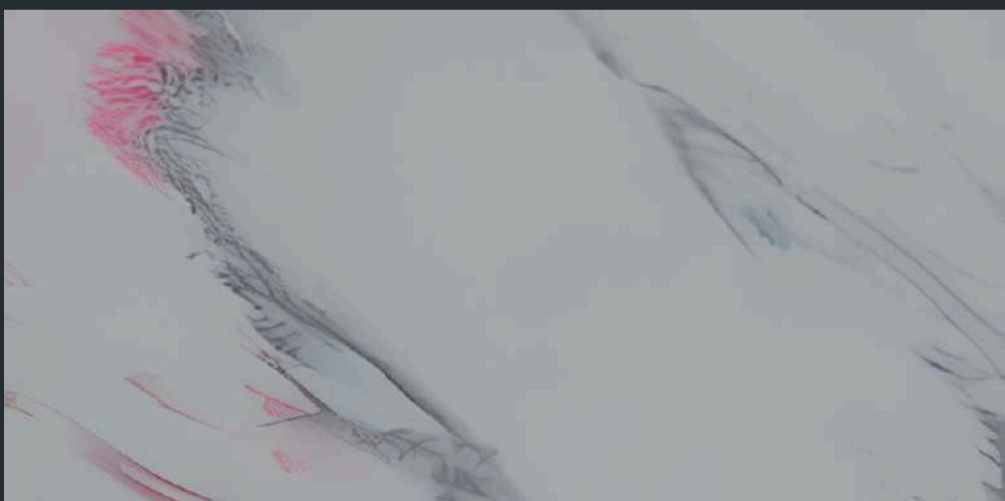

Sky Marble

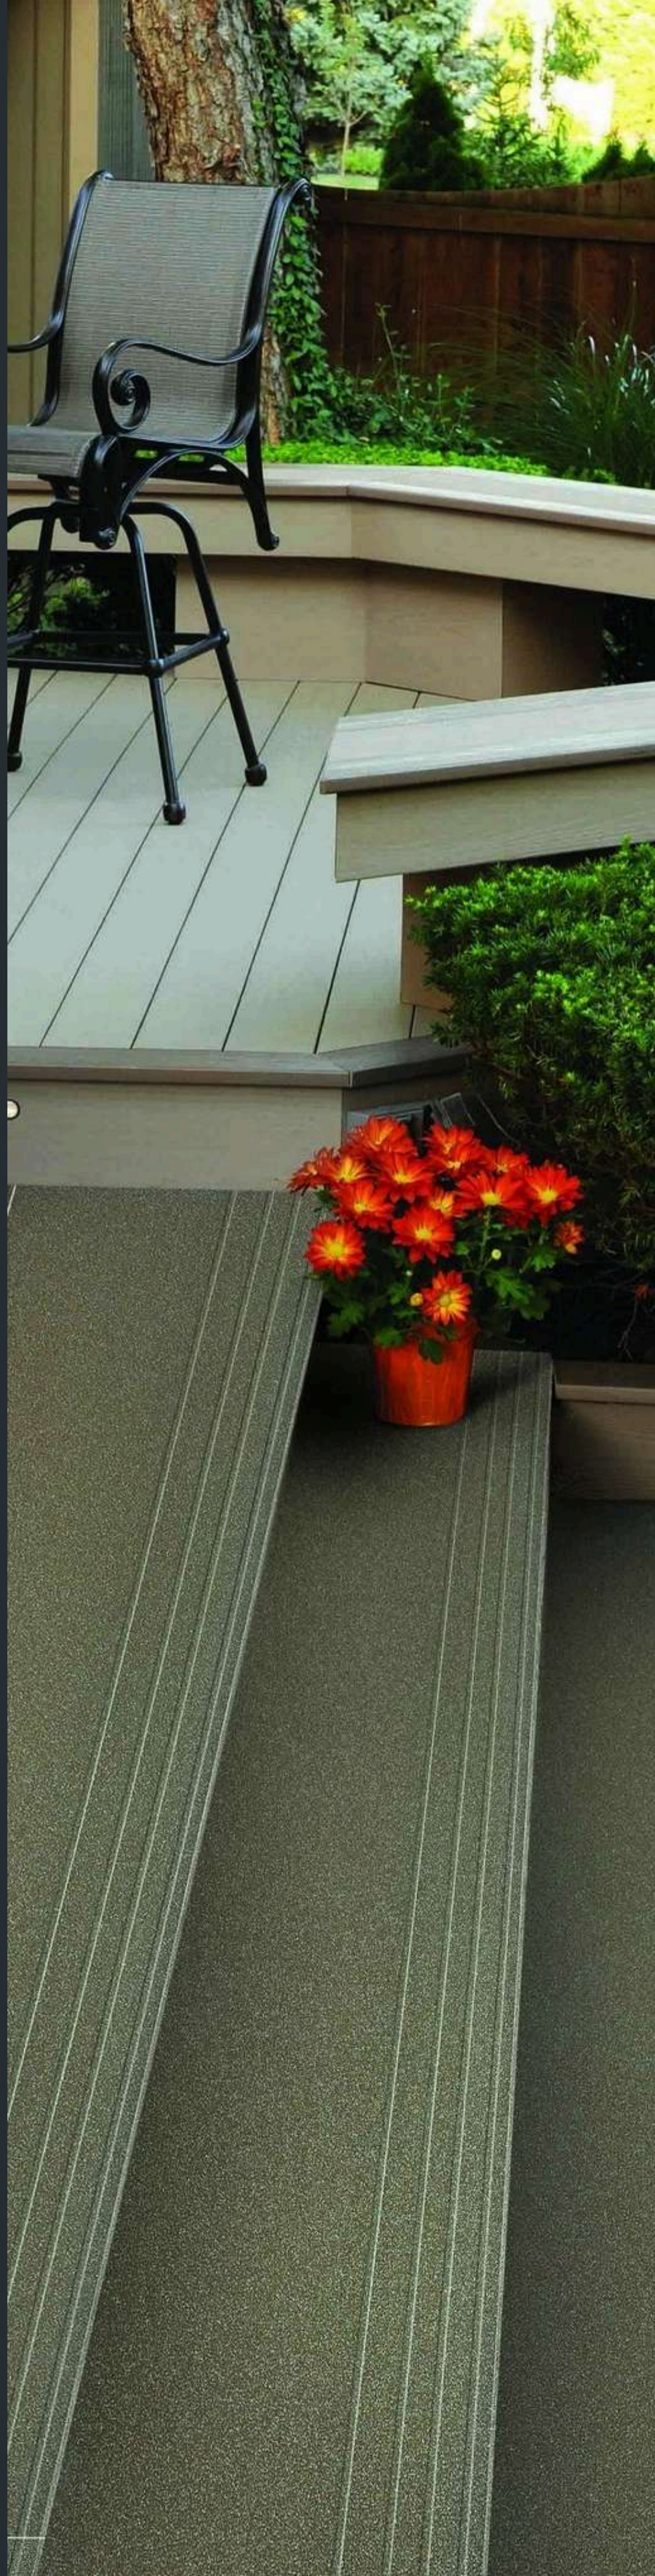

STEP TILES / RAISERS


MARBLE & GRANITE
950X600 MM / 12 , 15 MM



Bianco Granite



Grey Granite

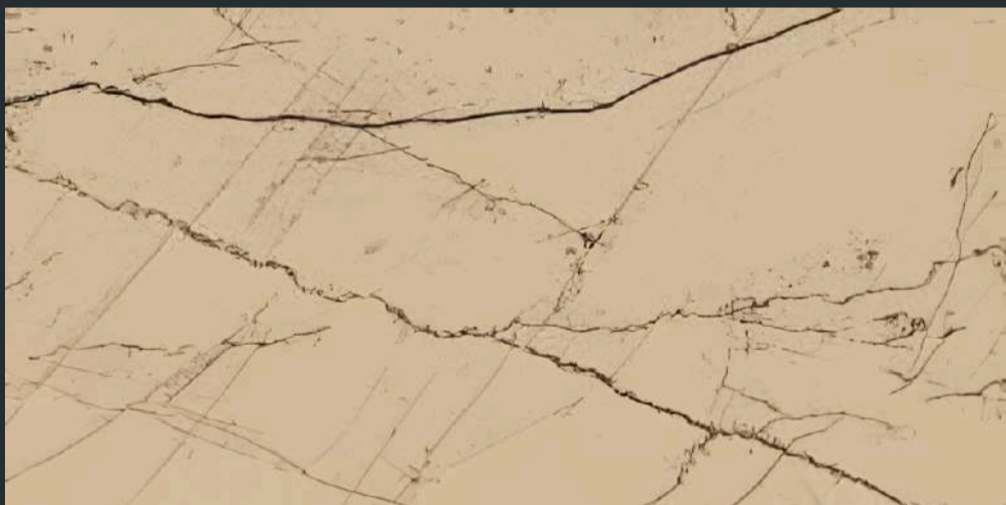

Light Beige Granite



Sky Granite



STEP TILES / RAISERS

S & P SERIES

950X600 MM / 12 , 15 MM



S & P Coffee



S & P Dark Beige



S & P Grey



S & P Sky




S & P Light Beige



STEP TILES / RAISERS

PLAIN SERIES

950X600 MM / 12 , 15 MM

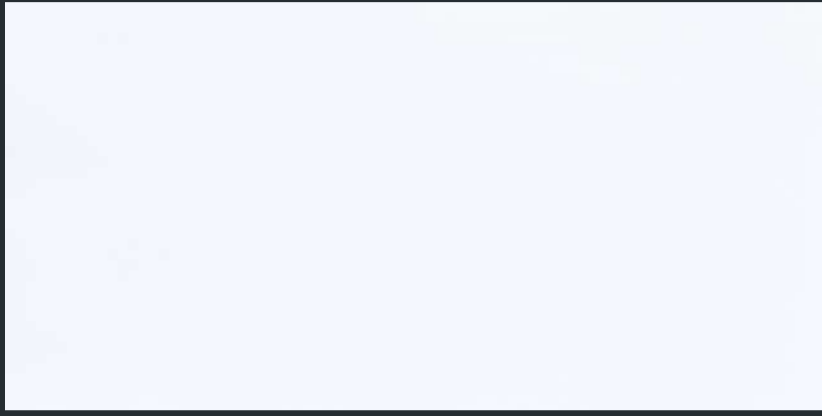

Bianco Granite




Grey Granite



Kota



Light Beige




Sky




SWIMMING POOL

MOSAIC TILE COLLECTION 247X122 MM / 8 MM THICK


POOL MOSAIC TILE

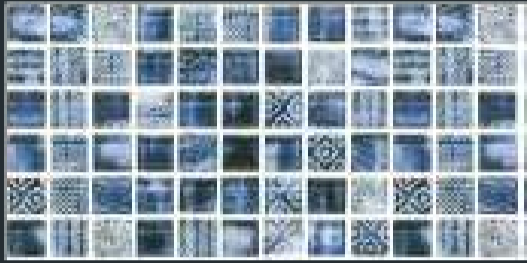

Neo Pool Art
Blue

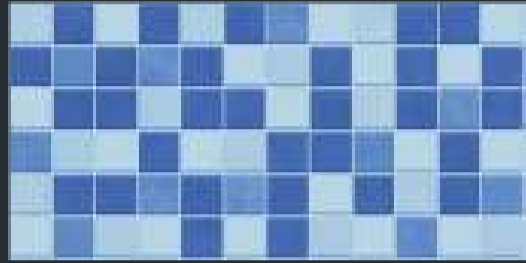

Neo Pool Deep
Blue

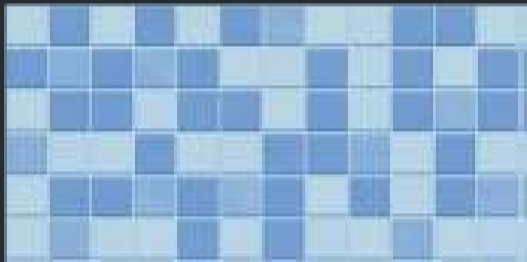


Neo Pool
Azure




Neo Pool
Sheen


POOL TILE




Dark Blue

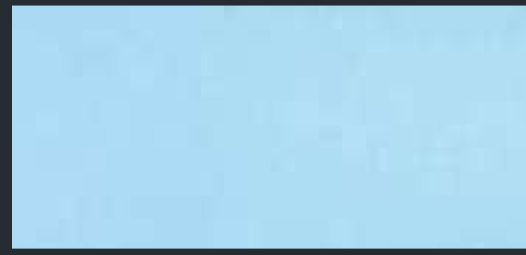


New Blue



Orient Blue



Black



White





MAPEI
ADHESIVE & CHEMICALS

PRODUCT INFORMATION



ADITYA ENTERPRISES

SCREED

TOP CEM



Description:

Topcem is a special hydraulic binder which, when mixed with graded aggregates and water, can produce mortars that can harden approximately 24 hours, and dry in approximately 4 days

तेज़ीसे सूखनेवाला विशेषहाइड्रोलिक बाइंडर
सक्रीडकी सामान्यसेटिंग केलिए

Where to use:

Formation of bonded, unbonded and floating screed. Installation of wood, PVC, linoleum, ceramic tiles, natural stone, carpet or any other flooring where rapid drying is required.

Consumption & Packaging:

2-2.5 kg/m² per cm of thickness.
20 kg bags.



PLANICRETE SBR



Description:

Mapei Planicrete SBR is a highly stable water dispersion of a special synthetic elastomer resistant to alkaline saponification

पी.एम्.एम् और वाटर प्रूफिंग कोटिंग बनाने के लिए

Where to use:

Bonding agent prior to apply render, screed / concrete topping, Waterproofing coating for kitchen, bathroom, balconies and terraces, Cement mortars for filling holes, reconstructing damaged areas.

Consumption & Packaging:

Depends on dilution and thickness of mortar
1 kg / 5 kg / 20 kg



SCREED

PLANICRETE ACRYLIC



Description:

Planicrete Acrylic is a one component acrylic based multipurpose polymer for waterproofing and repair.

पी.एम्.एम् और वाटर प्रूफिंग कोटिंग बनाने के लिए

Where to use:

Mortar additive for horizontal, vertical and overhead exterior and interior structural concrete repairs and concrete toppings. As a Slurry bond coat and waterproofing coat for wet and dry area. improve resistance to freeze cycles and to reduce permeability to De-icing salts in repairs mortar

Consumption & Packaging:

Depends on dilution and thickness of mortar
1 kg / 5 kg / 20 kg



EPORIP IN



Description:

Eporip IN is a solvent-free epoxy adhesive consisting of two pre-measured components that have to be mixed before use.

पुराने से नए काँक्रीट को जोड़ने और दरारें भरने के लिए एपॉक्सीबॉन्डिंग एजेंट

Where to use:

Monolithic construction joints between fresh and hardened concrete. Bonding precast concrete elements. Bonding steel to concrete, Filling cracks in concrete. Suitable for exterior application.

Consumption & Packaging:

Depends on dilution and thickness of mortar, 1 kg / 5 kg / 20 kg



ADHESIVE

KERASET



Description:

Keraset is a grey or white powder composed of cement, sands of selected granulometry, synthetic resins, and special additives.

छोटे और मिडियम साइज टाइल के लिए अडेसिव सिरामिक, वेट्रीफाईड के लिए

Where to use:

Internal walls and floors, and external floors bonding of ceramic tiles and mosaics. Tile on tile application, vitrified tiles, single-fired and double-fired tiles. Polymer modified adhesive, Hardens without appreciable shrinkage, Good Bond strength, Easy mixing and application.

Consumption & Packaging:

Length: 50 m, Width: 120 mm, Ultimate elongation: > 400%. 50 m x 12 cm rolls; 10 m x 12 cm rolls;



KERABOND PLUS



Description:

Kerabond Plus is a grey or white-coloured powder made from cement, selected graded sand, synthetic resin and special additives

छोटे और मिडियम साइज के टाइल, ग्रेनाईट और मार्बल के लिए अडेसिव सिरामिक, वेट्रीफाईड, स्टोन के लिए

Where to use:

Bonding all types of ceramic tiles vitrified tiles, natural stone and mosaics on internal walls and floors, and external floors. Perfect adhesion to all materials normally used in the building industry, Hardens without appreciable shrinkage.

Consumption & Packaging:

approx. 2 kg/m²; (trowel No. 4), 25 Kg Bags



ADHESIVE

ADESILEX P9



Description:

Adesilex P9 is a grey powder composed of cement, fine-aggregates, synthetic resins and special additives.

छोटे और बड़े साइज के टाइल,
ग्रेनाइट और मार्बल के लिए
अडेसिव वेट्रीफाईड, स्टोन के लिए

Where to use:

Interior and exterior bonding of ceramic tiles, vitrified tiles, stone, and mosaics on floors, walls and ceilings. Suitable for spot bonding of insulating materials such as expanded polystyrene, rock and glass wool, Eraclit® (wood-cement panels), sound-deadening panels, etc.

Consumption & Packaging:

approx. 2 kg/m²; (trowel No. 4), 25 Kg Bags



ADESILEX P10



Description:

Adesilex P10 is a particularly fine white powder composed of cement, graded aggregates, synthetic resins and special additives.

छोटे और बड़े साइज के टाइल, ग्रेनाइट
और मार्बल के लिए अडेसिव वेट्रीफाईड,
स्टोन के लिए

Where to use:

Installation of normal or heavy weight mesh-backed or paper-faced glass, ceramic, vitrified and marble mosaic. Installation of ceramic, vitrified tiles, and natural stone. Excellent adhesion to all conventional materials used in building, highly thixotropic, Mosaic tiles can be installed from the top towards the bottom without using spacer pegs.

Consumption & Packaging:

approx. 2 kg/m²; (trowel No. 4), 25 Kg Bags



ADHESIVE

KERAFLEX MAXI (S1)



Description:

Keralflex Maxi S1 is a grey or white powder composed Of cement and fine-graded sands.

मिडियम और बड़े साईज के टाईल, ग्रेनाईट और मार्बल के लिए अडेसिव वेट्रीफाईड, स्टोन, मोझेक के लिए

Where to use:

Interior and exterior wall and floor bonding, up to 15 mm thick, on a floor of vitrified tiles of every type and size on uneven substrates and renders, without having to level the flooring beforehand. Interior and exterior wall and floor bonding of stone materials, Spot bonding of insulating material in interiors such as expanded polystyrene, rock and glass wool, Erac wood-cement panels), sound-deadening panels, cork, etc.

Consumption & Packaging:

approx. 2 kg/m²; (trowel No. 4), 25 Kg Bags



KERALASTIC T IN



Description:

Keralastic T IN are two-component, solvent and water free adhesives that are flexible and waterproof

मेटल, प्लाई, सिमेंट और बाईसन बोर्ड पर किसी भी प्रकार के टाईल, ग्रेनाईल और मार्बल को चिपकाने के लिए पॉलीयूरेथेन अडेसिव


Where to use:

Indoor and outdoor, bonding of wall and floor ceramic tiles, vitrified tiles, porcelain tiles, stone material mosaics, etc., Screeds, renders, concrete, asphalt, wood, metal, PVC, reinforced polyester, fibre-cement, gypsum, gypsum board, gypsum panels, etc.

Consumption & Packaging:

approx. 2.5 kg/m²; (trowel No. 4)

5 kg (4.7 kg/m² component A + 0.3 kg/m² component B).

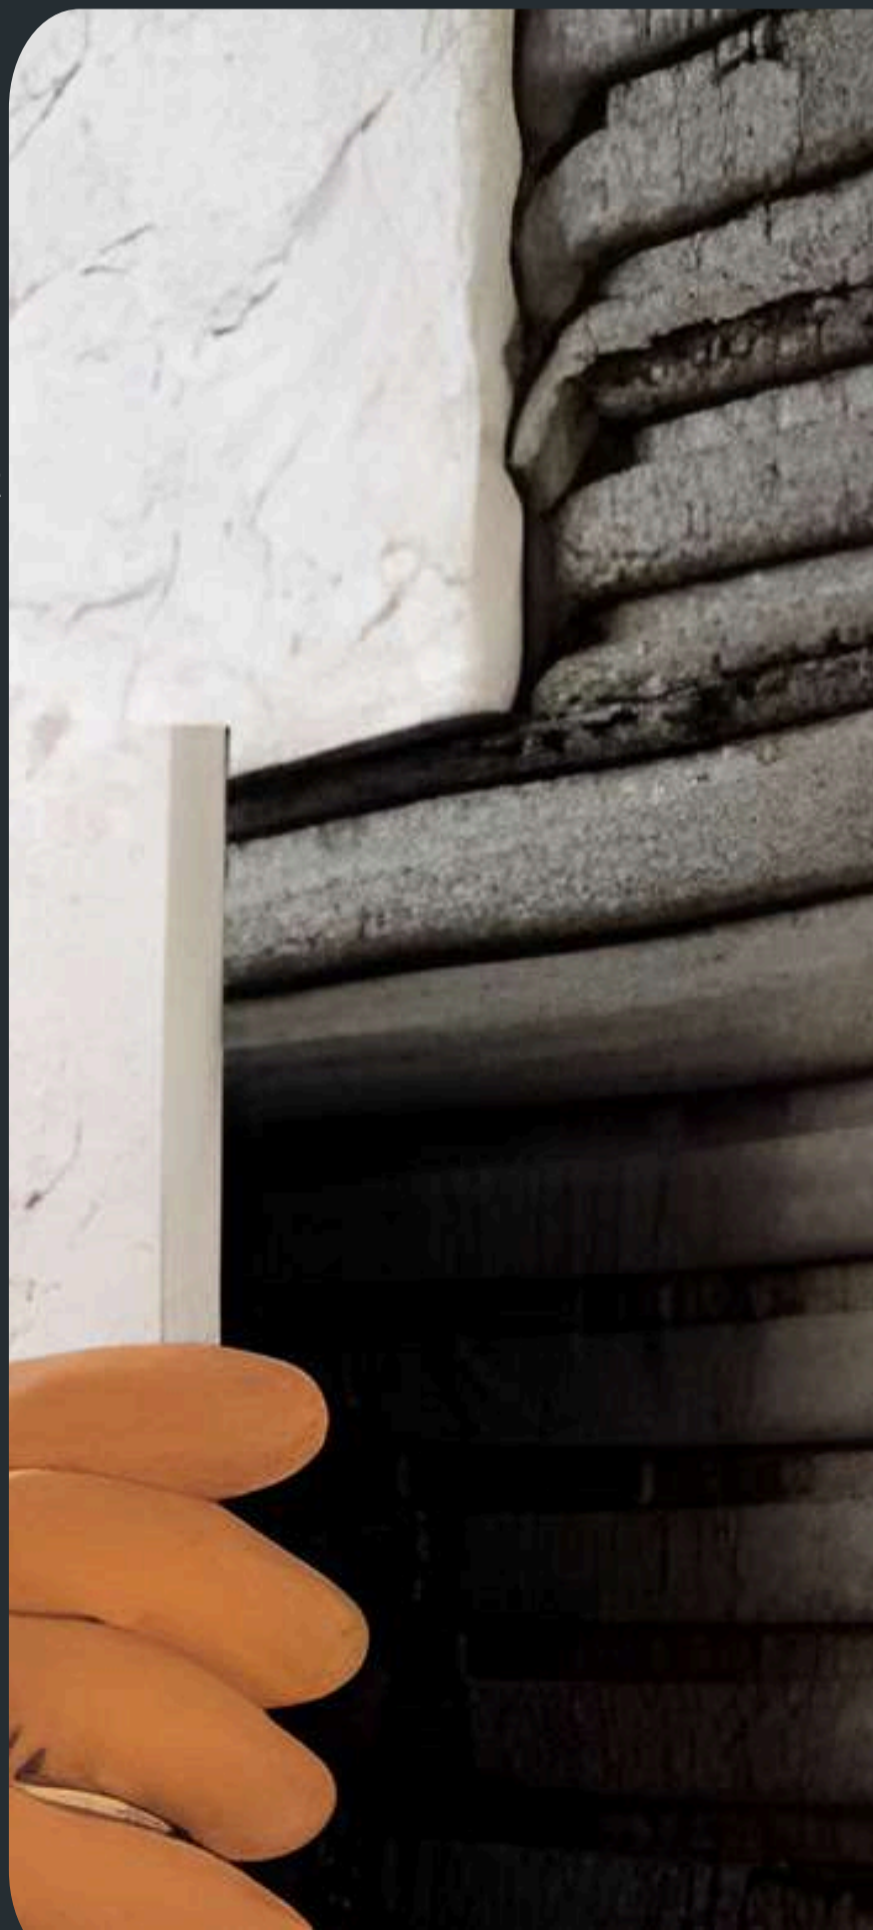

SELF LEVELLING

NOVAPLAN 257



Description:

Novoplan 257 is a grey powder consisting of special cements with fast setting and hydrating properties, with selected graded silica sand, resins and special additives.

काँक्रीट स्लैब को लेवलिंग करना

Where to use:

Levelling concrete slabs and cementitious screeds or Topcem screeds. Levelling existing concrete pavements, terrazzo, ceramic, natural stone and magnesite floors. Novoplan 257 can be applied with an automatic pressure pump for distances over 100 m.

Consumption & Packaging:

1.6 kg/m² per mm of thickness, 25 kg



MAPESLOPE



Description:

MapeSlope IN is a grey-coloured powder made up of special cementitious binders, selected aggregates, synthetic resins and special additives

काँक्रीट सीमेंटयुक्त पेंच और पेंच बनाए गए विशेष बाइंडर्स से

Where to use:

Concrete, Cementitious screeds and screeds made from special binders (Topcem or Topcem Pronto), Existing external ceramic, terrazzo and stone floors, Smooth or granulated bituminous membranes.

Consumption & Packaging:

Approx. 1.6 kg/m² per mm of thickness, 25 kg



PRIMERS

PRIMER G



Description:

Primer G is a water dispersion of special synthetic resins.


फिक्सिंग से पहले जिप्सम सतहों के उपचार के लिए सेरेमिक टाइल्स।

Where to use:

For treating gypsum surfaces prior to fixing ceramic tiles. As an anchoring coat for gypsum-based spray able plasters. Improve the bonding of smoothing compounds on cement, gypsum, asphalt, ceramic and marble surfaces, To provide uniform absorption in cementitious or gypsum surfaces.

Consumption & Packaging:

0.10 to 0.20 kg/m², depending on the porosity of the substrate. 5 kg

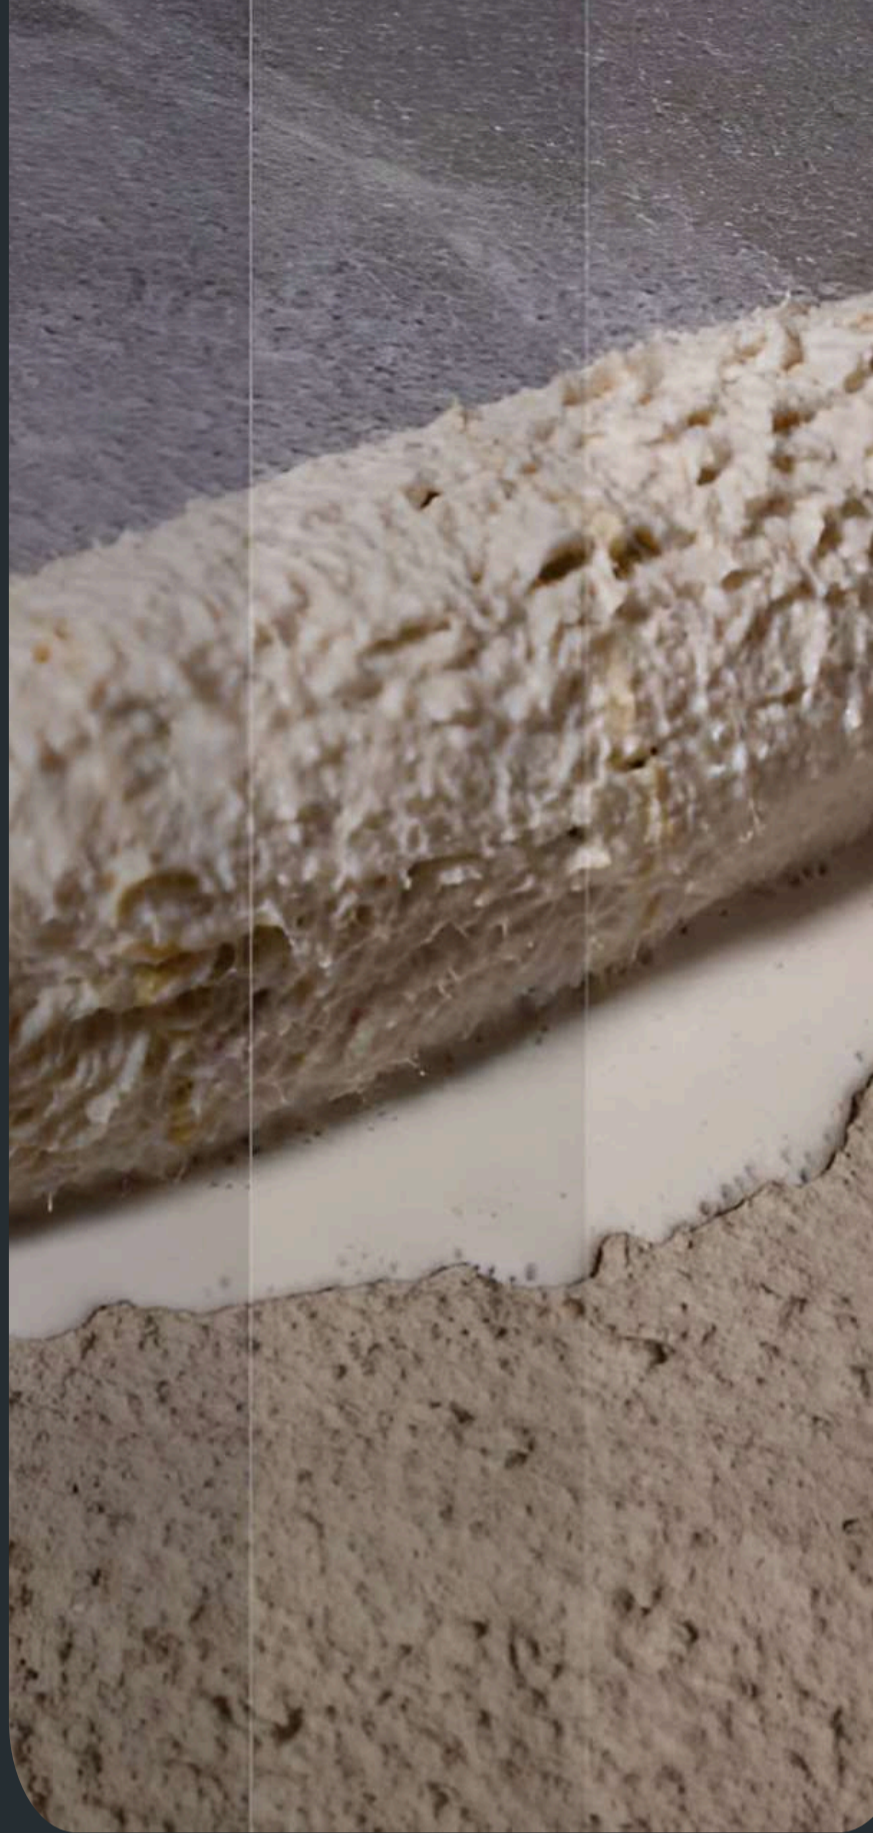

ECO PRIME GRIP PLUS



Description:

Eco Prim Grip Plus is a low odour, solvent-free primer composed of synthetic resin in water dispersion and aggregates.

पुराने पर चौरसाई यौगिकों का अनुप्रयोग सिरेमिक, टेराज़ो और प्राकृतिक पत्थर के फर्श

Where to use:

Application of smoothing compounds on old ceramic, terrazzo and natural stone floors. Laying ceramic and natural stone floors directly on top of old ceramic floors. Adhesion promoter for cementitious smoothing compounds on substrates previously consolidated. Application of render on concrete, brickwork, substrates, etc.

Consumption & Packaging:

0.20 and 0.30 kg/m² according to the absorption of the substrate. 5 kg



WATERPROFFERS

MAPELASTIC SMART



Description:

Mapelastic Smart is a two-component mortar based on cementitious binders. Fine-grained selected aggregates, special admixtures and synthetic polymers in water dispers

छत, स्विमिंगपुल और टॉयलेट डियम के वॉटरप्रूफिंग के लिए सिमेंट युक्त कोटिंग

Where to use:

Protection of cementitious renders or concrete. Waterproofing hydraulic projects such as channels, faces of dams, swimming pools, basins, storage tanks, etc. and balconies and terraces.

Consumption & Packaging:

Trowel or roller: Approx. 1.6 kg/m² per mm
Spray gun application: Approx. 2.2 kg/m² per mm of thickness
Unit of 30 Kgs: (20 Kg Bag & 10 Kg Drum)



AQUAFLEX ROOF HR IN



Description:

Aquaflex Roof HR IN Fibre-filled liquid membrane in watery emulsion with high solar reflectance and thermal emittance.

छत के वॉटरप्रूफिंग के लिए

Where to use:

Protection against UV rays and heat for waterproof systems made from a distilled-bitumen/polymer membrane. Protecting and waterproofing concrete surfaces, cementitious screeds. Screeds made using special binders

Consumption & Packaging:

2 kg/m² per mm of on cementitious substrates
0.90 kg/m² per two coats on bituminous substrates
20 kg drums



WATERPROFFERS

PLANISEAL 288



Description:

Planiseal 288 is a one-component osmotic mortar, composed of a cement-based compound, selected grade aggregates and special synthetic resins.

भूमिगत और उपरी सतह वॉटर टैंक के वॉटरप्रूफिंग और डैम्पप्रूफ के लिए सिमेंटयुक्त कोटिंग

Where to use:

Repairing underground masonries subject to water and moisture. Waterproofing basins, reservoirs, concrete or masonry tanks containing drinking water. Waterproofing concrete or masonry tanks containing sewage water. Excellent adhesion to the substrate. Can be applied by trowel, brush or by spray.

Consumption & Packaging:

21-23% (5.25-5.75 for each 25 kg bag), 25 Kg



MAPEBAND TAPE H



Description:

Alkali-resistant rubber tape with felt for cementitious waterproofing systems and liquid membranes

छतों, बालकनियों आदि के मैपग्राउट या प्लैनिटॉप रेंज के विस्तार जोड़ों की लचीली वॉटरप्रूफिंग

Where to use:

Flexible waterproofing of expansion joints of from the Mapegrout or Planitop ranges of terraces, balconies, etc. and of wall joints and floor to wall joints to be treated with Mapegum WPS, Mapelastic, Mapelastic Smart, Mapelastic, AquaDefense, Monolastic or Monolastic Ultra. Waterproofing of expansion joints of precast panels, piping, bath, shower and kitchen drains using the special Mapeband gaskets.

Consumption & Packaging:

Length: 50 m, Width: 120 mm, Ultimate elongation: > 400%. 50 m x 12 cm rolls; 10 m x 12 cm rolls



GROUTS

KERAPOXY



Description:

Kerapoxy is a two-component, epoxy-resin-based product with silica sand and special components, with excellent resistance to acids and excellent cleanability.

टाईल और पत्थर के बीच में सांधा भरने के लिए एपोक्सी ग्राउट

Where to use:

Indoor and outdoor grouting of ceramic tile and natural stone floors and walls, Suitable for acid-resistant bonding and rapid setting of ceramic tiles, stone materials, fibre-cement, concrete, any other building material on all types of substrates normally used in construction.

Consumption & Packaging:

Depending on the size of the tile and width of the joints (kg/m²) 1 kg, 5 kg and 2 kg



KERAPOXY DESIGN



Description:

Kerapoxy Easy Design is a two-component, epoxy resin-based decorative grout, with glass microspheres and other special components.

टाईल और पत्थर के बीच में सांधा भरने के लिए एपोक्सी ग्राउट

Where to use:

Decorative grouting of internal and external tiled floors and walls. Also suitable for an acid-resistant bond to all substrates.

Consumption & Packaging:

Depending on the size of the tile and width of the joints (kg/m²) 1 kg, 5 kg and 2 kg



GROUTS

KERAPOXY CLEANER



Description:

Special cleaning solution for epoxy grout. Suitable for cleaning operations after completing laying work and for removing Trace and stain of Epoxy grout.

Where to use:

To be applied last on the tiles, after application of grout is done, to ensure no stains are left behind.

Consumption & Packaging:

- 0.75 kg spray bottles;
- 5 kg canisters.

