



Plain Clamps

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Thickness	Slot Size Width	Slot Size Length	Weight Lbs.
K-901	4	1 5/8	3/4	11/16	1 3/8	0.90
K-902	6	1 3/4	7/8	11/16	2 1/16	1.80
K-903	8	2 1/8	1 1/8	13/16	2 13/16	3.75
K-904	10	2 1/2	1 3/8	15/16	3 11/16	6.25



Plain Clamps - Drilled & Tapped with Square Head Set Screw

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Thickness	Slot Size Width	Slot Size Length	Thread Size	Weight Lbs.
K-901-A	4	1 5/8	3/4	11/16	1 3/8	1/2-13	0.93
K-902-A	6	1 3/4	7/8	11/16	2 1/16	5/8-11	1.88
K-903-A	8	2 1/8	1 1/8	13/16	2 13/16	3/4-10	3.75
K-904-A	10	2 1/2	1 3/8	15/16	3 11/16	7/8-9	6.37



Goose Neck Clamps

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Thickness	Slot Size Width	Slot Size Length	Offset	Weight Lbs.
K-940	4	1 5/8	3/4	11/16	15/16	13/16	1.00
K-941	6	1 3/4	7/8	11/16	1 11/16	15/16	1.75
K-942	8	2 1/8	1 1/8	13/16	2 7/16	1 1/8	3.80



Goose Neck Clamps - Drilled & Tapped with Square Head Set Screw

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Thickness	Slot Size Width	Slot Size Length	Offset	Thread Size	Weight Lbs.
K-940-A	4	1 5/8	3/4	11/16	15/16	13/16	5/8-11	1.22
K-941-A	6	1 3/4	7/8	11/16	1 11/16	15/16	5/8-11	1.88
K-942-A	8	2 1/8	1 1/8	13/16	2 7/16	1 1/8	5/8-11	3.83



Finger Clamps

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Thickness	Slot Size Width	Slot Size Length	Weight Lbs.
K-930	4	1 5/8	3/4	11/16	1 3/8	0.75
K-931	6	1 3/4	7/8	11/16	1 15/16	1.50
K-932	8	2 1/8	1 1/8	13/16	2 9/16	3.00



U Clamps

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Thickness	Slot Size Width	Slot Size Length	Weight Lbs.
K-920	4	1 3/4	3/4	11/16	3 1/2	1.00
K-921	6	2	7/8	11/16	5 1/2	2.00
K-922	8	2 3/8	1 1/8	13/16	7 3/8	4.00
K-923	10	2 3/4	1 1/4	15/16	9	6.00
K-924	12	3 1/4	1 3/8	1 1/16	11	8.00



T-Slot Nuts

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA
Tapped: UNC-2B

Stock No.	E T-Slot Size	Stud Dia. & Thread UNC-2B	A Width	B Shoulder Height	C Length	D Overall Height	Weight Lbs.
K-955	5/8	1/2-13	1 1/8	13/32	1 1/4	3/4	0.18
K-956	3/4	5/8-11	1 5/16	17/32	1 1/2	7/8	0.30
K-957	7/8	3/4-10	1 1/2	9/16	1 3/4	1	0.42
K-958	1	7/8-9	1 3/4	5/8	2	1 1/8	0.63
K-960	1 1/4	1-8	2	7/8	2 3/8	1 11/32	1.11



Strap Clamps - Universal Adjustable Pattern

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Adjustment	Max T-Slot Bolt Size	Weight Lbs.
K-910	5 1/16	1 5/8	2 1/4	5/8	1.30
K-911	8	2 1/8	4	3/4	3.10
K-912	12	2 3/4	6 1/4	1	9.80



Saddles for Universal Adjustable Strap Clamps

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Max T-Slot Bolt Size	Weight Lbs.
K-910-A	1 5/16	1 1/2	5/8	0.20
K-911-A	1 1/2	1 3/4	3/4	0.28
K-912-A	2 1/8	2 1/2	1	0.75



Set-Up Wedges

Drop Forged Carbon Steel, Self-Colored
ASTM A521, Class CA

Stock No.	Length	Width	Thick End	Weight Lbs.
K-950	3	1	1/4	0.15
K-951	5	1	1/2	0.33
K-952	6	1 1/4	3/4	0.63
K-953	8	1 5/8	1	1.55
K-954	12	2 1/2	1 1/2	5.25



Shown Assembled
with Weld-On Clip

D-Rings - C1045

Drop Forged Carbon Steel, Self Colored
ASTM A668, Class D
75,000 PSI Minimum Tensile Strength

Stock No.	A Sectional Diameter	B Width	C Over-All Length	D Inside Length	Rated Capacity Lbs.	Weight Lbs.
K-793	3/8	2 3/16	2 1/4	1 1/2	2,100	0.22
K-795	1/2	3 3/8	3 1/2	2 1/2	4,100	0.61
K-796	5/8	4 1/4	4 1/4	3	8,800	1.13
K-797	3/4	4 1/2	4 1/2	3	10,600	1.65
K-800	1	5	6	4	17,000	3.70



Shown Assembled
with Bolt-On Clip

D-Rings Weld-On Clips - C1018-C1020

Carbon Steel, Self Colored

Stock No.	A Length	B Height	C Width	D Clearance	E Thickness	Weight Lbs.
K-795-A	2	1-1/16	1 5/8	15/16	3/8	0.48
K-796-A	2 1/2	1 1/8	1 3/4	15/16	3/8	0.65
K-797-A	2 1/4	1 1/4	1 5/8	13/16	3/8	0.61
K-800-A	2 1/2	1 11/16	1 15/16	1 3/16	3/8	1.13

D-Rings Bolt-On Clips - C1018-C1020

Carbon Steel, Self Colored

Stock No.	A Length	B Height	C Width	D Clearance	E Thickness	F Hole Location	Weight Lbs.
K-793-B	3 11/32	5/8	1 3/16	9/16	5/32	2 5/16	0.18
K-795-B	3 9/16	15/16	1 5/8	13/16	1/4	2	0.45



Shown Assembled with Weld-On Clip

D-Ring - C1045

Drop Forged Carbon Steel, Self Colored
ASTM A668, Class D
75,000 PSI Minimum Tensile Strength



Stock No.	A Sectional Diameter	B Width	C Over-All Length	D Inside Length	Rated Capacity Lbs.	Weight Lbs.
K-786	3/4	5 1/2	5 9/16	4 1/6	7,300	2.15

D-Ring Weld-On Clip - C1018-C1020


Carbon Steel, Self Colored

Stock No.	A Length	B Height	C Width	D Clearance	E Thickness	Weight Lbs.
K-786-A	3 1/4	1 1/16	1 9/16	1 1/16	1/4	0.58



D-Ring - C1045


Drop Forged Carbon Steel, Self Colored
ASTM A668, Class D
75,000 PSI Minimum Tensile Strength



Stock No.	A Sectional Diameter	B Width	C Over-All Length	D Inside Length	E Bend Location	F Height	Rated Capty. Lbs..	Weight Lbs.
K-886	1	5	5 1/2	3 1/2	2 3/4	2 11/16	17,000	3.70

D-Ring Weld-On Clip - C1018-C1020

Carbon Steel, Self Colored

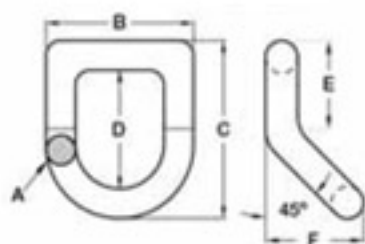


Stock No.	A Length	B Height	C Width	D Clearance	E Thickness	Weight Lbs.
K-800-A	2 1/2	1 11/16	1 15/16	1 3/16	3/8	1.13

C-Clamp Screws - Zinc Plated

Drop Forged Carbon Steel
ASTM A181, Class 70
Threaded: UNC-2A



Stock No.	Dia. & Thread UNC-2A	A Length	B Width	C Thickness	Weight Lbs.
K-9500	1/2-13	2 1/2	2 17/64	41/64	0.18
K-9625	5/8-11	3 31/64	2 7/8	23/32	0.38
K-9750	3/4-10	3 31/32	2 31/32	27/32	0.67

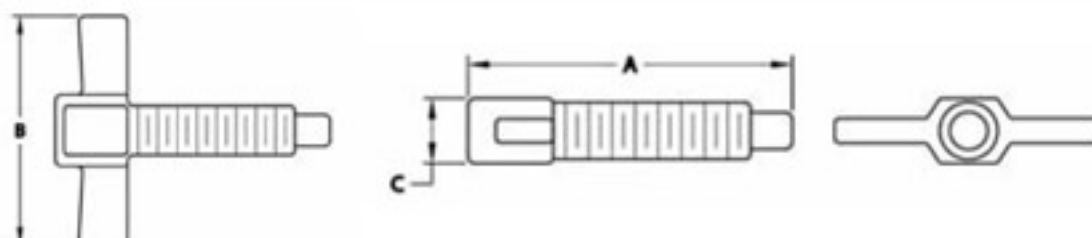



C-Clamps - Zinc Plated

Drop Forged Carbon Steel
ASTM A181, Class 70
Tapped: UNC-2B

Stock No.	Dia. & Thread UNC-2A	A Length	B Hole Dia.	C Thickness	Weight Lbs.
K-8500	1/2-13	3 9/32	29/64	25/32	0.39
K-8625	5/8-11	4 11/32	21/32	1 1/32	0.95
K-8750	3/4-10	5 1/2	23/32	1 1/4	2.00

