



complete packing solutions



MANUFACTURERS, SUPPLIERS & IMPORTERS OF:-

Packaging Machinery, Material Handling Equipments &
All Kind of Packaging Materials.

SHYAM PLASTIC INDUSTRIES

SERVING TO INDUSTRY SINCE 35 YEARS

www.shyampack.in

COMPANY BRIEF

Shyam Plastic Industries is the leading manufacturer and supplier of packaging material and machinery from the past three decades based out of Gill Road in Ludhiana. We provide all types of solutions to problems related to packing of the products and machinery. We also strive to ensure that our customers are provided with the best quality of products at affordable prices and they are satisfied and content with our services/timely delivery of products. The highlight of our being is the excelsior & expertise which we bring in this area because we deal from manufacturing to retail.

We are committed to deliver its orders within the stipulated time, as it plays a vital role in establishing a company as a reliable brand. Our wide distribution network and flexibility in production and workforce enable us to meet this objective.

WHY CHOOSE US?

We here at Shyam Plastics believe in quality over quantity. Our team is quite thorough with our products which in turn ensures better customer support and relationship. Together we strive to deliver the orders within the stipulated time lines so that we remain a reliable brand and also attract more elite customers.

All in all we have a client centric approach which in turn means- enabled to take bulk orders even for urgent requirements, maintains cordial relationship with the clients, Competitive pricing policy & Strictly follow Quality measures & parameters during production of our entire product range.

**ONE STOP
SOLUTION FOR
ALL PACKAGING
MACHINES &
MATERIALS**



VISION

Shyam Plastic Industries vision to become the premier player in the plastics industry through innovations that add value to the business of its clients.



MISSION

- To continuously invest in innovation and product development.
- To continuously better the systems and processes.
- To offer an enabling environment to employees for their professional growth.



STRAPPING MACHINE -101

VOLTAGE	220V
POWER	320W
PHASE	SINGLE
FREQUENCY	50HZ
STRAPPING TENSION	40 TO 45 ON ADJUSTABLE
STRAPPING SPEED	1.8 SEC PER STRAP
STRAPPING WIDTH	6 TO 15MM
DIMENSION (L X W X H)	836 X 560 X 725MM
MACHINE WEIGHT	85KG
USAGE/APPLICATION	PP STRAP



HEAVY DUTY STRAPPING MACHINE -102

VOLTAGE	220V
POWER	320W
PHASE	SINGLE
FREQUENCY	50 HZ
STRAPPING TENSION	40 TO 45 ON ADJUSTABLE
STRAPPING SPEED	1.8 SEC PER STRAP
STRAPPING WIDTH	6 TO 15MM
DIMENSION (L X W X H)	836 X 560 X 725MM
MACHINE WEIGHT	110KG
USAGE/APPLICATION	PP STRAP



LOW HEIGHT HEAVY DUTY STRAPPING MACHINE -103

CAPACITY	1.5 SEC PER / STRAP
PHASE	1 PHASE 230V
VOLTAGE	230V
AUTOMATIC GRADE	SEMI AUTO
POWER	230V
SIZE	30 X 20 X 20 INCH
MACHINE SPEED	1.5 SEC / STRAP
CYCLE TIME	1.5 SEC
STRAPPING FORCE	60KG
MACHINE WEIGHT	90 - 100KG
USAGE/APPLICATION	PP STRAP



HEAVY DUTY STRAPPING MACHINE WITH BALL BEARING -104

VOLTAGE	220 V
POWER	320 W
PHASE	SINGLE
FREQUENCY	50 HZ
STRAPPING TENSION	40 TO 45 ON ADJUSTABLE
STRAPPING SPEED	1.8 SEC PER STRAP
STRAPPING WIDTH	6 TO 15 MM
DIMENSION (L X W X H)	836 X 560 X 725 MM
MACHINE WEIGHT	110 KG
USAGE/APPLICATION	PP STRAP



STRAPPING MACHINE CHARLIE (MAKE IN TAIWAN) -105

VOLTAGE	220 V
POWER	320 W
PHASE	SINGLE
FREQUENCY	50 HZ
STRAPPING TENSION	40 TO 45 ON ADJUSTABLE
STRAPPING SPEED	1.8 SEC PER STRAP
STRAPPING WIDTH	6 TO 15 MM
DIMENSION (L X W X H)	836 X 560 X 725 MM
MACHINE WEIGHT	110 KG
USAGE/APPLICATION	PP STRAP



FULLY AUTOMATIC STRAPPING MACHINE -106

MAX. STRAP SIZE	800 X 600 MM
MIN. STRAP SIZE	80 X 50 MM
STRAPPING SPEED	2.15 SEC./ STRAP
STRAP WIDTH	9-15 MM
WORKING TABLE HEIGHT	830 MM
POWER SOURCES (V/HZ)	440 / 50, 0.12 HP
DIMENSION (L X W X H)	1420 X 650 X 1565
MACHINE WEIGHT	260 KG
USAGE/APPLICATION	PP STRAP





HORIZONTAL BAND SEALER -111

VOLTAGE	AC 220/50
MOTOR POWER	50 W
SEALING POWER	300X2
SEALING SPEED	0~12 (0~16)
SEALING WIDTH	12 MM
TEMPERATURE CONTROL	0~300
FILM THICKNESS	<0.08
MAX. CONVEYOR LOADING	3 KG
MACHINE SIZE	840X380X320 MM
MACHINE WEIGHT	23 KG



VERTICAL BAND SEALER -112

VOLTAGE	AC 220/50
MOTOR POWER	50 W
SEALING SPEED	0~12 (0~16)
SEALING WIDTH	4-12 MM
CAPACITY	0-12MTR/MIN
TEMPERATURE CONTROL	0-300 C
MAX. CONVEYOR LOAD	5 KG
SEALING WIDTH	12 MM
MACHINE WEIGHT	30KGS



S S BAND SEALER -113

VOLTAGE	AC 220/50
MOTOR POWER	50 W
SEALING POWER	300X2
SEALING SPEED	0~12 (0~16)
SEALING WIDTH	12 MM
TEMPERATURE CONTROL	0~300
FILM THICKNESS	<0.08
MAXCONVEYOR LOADING	3 KG
MACHINE SIZE	840X380X320 MM
MACHINE WEIGHT	23 KG



AIR FLUSHING BAND SEALER -114

VOLTAGE	220V/50 HZ
SEALING SPEED	0-12 (0-16) M/MIN
SEALING POWER	300X2
SEALING WIDTH MM	8 ~ 10
TEMPERATURE RANGE	0 ~ 300 DEGC
DISTANCE FROM THE SEALING CENTER TO THE CONVEYING TABLE	10 ~ 40 MM
FILM THICKNESS	0.08 MM
OVERALL CONVEYOR LOADING	3 KG
OVERALL DIMENSION (LXWXH) MM	840X380X320 MM
MACHINE WEIGHT	30 KG



AIR FLUSHING BIG BAND SEALER -115

VOLTAGE	220V/50 HZ
POWER	835 W
SEALING SPEED	0-12 (0-16) M/MIN
HEAT SEALING POWER W	40X2
CONVEYOR SIZE L X W MM	930X180
SEALING WIDTH MM	8 ~ 10
TEMPERATURE RANGE	0 ~ 300 DEGC
DISTANCE FROM THE SEALING CENTER TO THE CONVEYING TABLE	10 ~ 40 MM
FILM THICKNESS	0.08 MM
OVERALL CONVEYOR LOADING	3 KG
OVERALL DIMENSION (LXWXH) MM	1050 X 560 X 900
MACHINE WEIGHT	62 KG



10 KG BAND SEALER -116

VOLTAGE	110V /220V 50-60 HZ
POWER	1235 W
SEALING SPEED	0-12M/MIN
SEALING WIDTH	6 -12 MM
TEMPERATURE RANGE	0~300 C
MAX CONVEYOR LOADING	10 KG
PRINTING CATEGORY	STEEL WHEEL PRINTING
MACHINE SIZE	1243*580*1228 MM
MACHINE WEIGHT	42 KG





6X9 SHRINK MACHINE -121

CONVEYOR SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	3 KW
CONVEYOR LOAD	5 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM)	1000X750X260 (L X W X H)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15



15X9 SHRINK MACHINE -122

CONVEYOR SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	6 KW
CONVEYOR LOAD	7 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM)	1200X690X850 (L X W X H)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15



45X25 SHRINK MACHINE -123

CONVEYOR SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	6 KW
CONVEYOR LOAD	10 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM)	1200X740X850 (L X W X H)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15



12X18 SHRINK MACHINE -124

CONVEYOR SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	9 KW
CONVEYOR LOAD	15 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM)	1500X740X1050 (L X W X H)
MOTOR	SINGLE MOTOR (AC DRIVE)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15



15X20 SHRINK MACHINE -125

CONVEYOR SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	17 KW
CONVEYOR LOAD	25 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM)	2500X730X1600 (L X W X H)
MOTOR	DOUBLE MOTOR (AC DRIVE)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15



16X24 SHRINK MACHINE -126

CONVEYOR SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	20 KW
CONVEYOR LOAD	30 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM))	2700X740X1800 (L X W X H)
MOTOR	DOUBLE MOTOR (AC DRIVE)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15
* WITH COOLING FAN	





WEB SEALER -131

VOLTAGE	220V/380V50Hz
POWER	1.5 KW
PACKAGING (PER MIN)	4-8 PCS
DELIVERY LOAD	20 KG
MACHINE DIMENSION (MM)	450X300X350



WEB SEALER & 15X20 SHRINK TUNNEL -132

PACKAGING SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	18.5 KW
CONVEYOR LOAD	25 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM)	3200X730X1600 (L X W X H)
MOTOR	DOUBLE MOTOR (AC DRIVE)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15



16X24 ATTACHED WEB SEALER -133

CONVEYOR SPEED	0-10M/MIN
VOLTAGE	220V/380V50Hz
POWER	20 KW
CONVEYOR LOAD	30 KG
PHASE	3 PHASE
MACHINE DIMENSION (MM)	3500X740X1800 (L X W X H)
MOTOR	DOUBLE MOTOR (AC DRIVE)
HEATING TIME (MINUTES)	10
COOLING TIME (MINUTES)	15
* WITH COOLING FAN	



SHRINK CHAMBER -134

FREQUENCY	AC 220 V
POWER (KW)	4
PACKAGING SPEED (PER HOUR)	700-1000
MAX PACKAGING DIMENSION (LXWXH) MM	500X375X250
DIMENSIONS (LXWXH) MM	1945X795X1080
MACHINE WEIGHT	80



L - SEALER MANUAL -135

VOLTAGE	Ac 220/50
POWER (KW)	1.0
PACKAGING SPEED (PER HOUR)	300X375X250
MAX PACKAGING DIMENSION (LXWXH) MM	500X375
MAX SEALING DIMENSION (LXWXH) MM	1945X795X180
DIMENSIONS (LXWXH) MM	80
MACHINE WEIGHT	POWDER COATED (M.S)
BODY	



L - SEALER WITH CONVEYOR - 136

CAPACITY	15 - 35 PACKS/MIN WITH CONVEYOR
VOLTAGE	220 V
FREQUENCY	50/60 HZ
PHASE	SINGLE PHASE
SIZE	15 X 20 MM
WORKING HEIGHT	780-850 MM
POWER CONSUMPTION	3.5 KW





MINI LIQUID FILLING MACHINE -141

Voltage Power	110V -220 V / 50 - 60 Hz 40W
Maximum Runoff	2000ml/M (Water)
Filling Range	5 ml - 2000ml
Optimal Filling Range	5 ml - 1000ml
Filling Precision	+ _ 2%



10 ML TO 500 ML LIQUID FILLING MACHINE -142

CAPACITY	20-25 BOTTLES/MIN (DEPENDS ON QTY)
POWER CONSUMPTION	20 W
FILLING RANGE	10ML TO 500ML
GAS PRESSURE	0.4-0.6 MPA
FILLING ACCURACY	1%
FREQUENCY	50 HZ
EXTERNAL DIMENSIONS	100X500X1050 MM (LXWXH)
OUTPUT	SIGNAL HEAD
FINISHING	POLISHED
PHASE	SINGLE PHASE
NET WEIGHT	35 KG



100 ML TO 1000 ML LIQUID FILLING MACHINE -143

CAPACITY	20-25 BOTTLES/MIN (DEPENDS ON QTY)
POWER CONSUMPTION	20 W
FILLING RANGE	100ML TO 1000ML
GAS PRESSURE	0.4-0.6 MPA
FILLING ACCURACY	1%
FREQUENCY	50 HZ
EXTERNAL DIMENSIONS	100X500X1050 MM (LXWXH)
OUTPUT	SIGNAL HEAD
FINISHING	POLISHED
PHASE	SINGLE PHASE
NET WEIGHT	40 KG



100ML TO 1000 ML WITH STAND -144

CAPACITY	20-25 BOTTLES/MIN (DEPENDS ON QTY)
POWER CONSUMPTION	20 W
FILLING RANGE	100ML TO 1000ML
GAS PRESSURE	0.4-0.6 MPA
FILLING ACCURACY	1%
FREQUENCY	50 HZ
EXTERNAL DIMENSIONS	100X500X1050 MM (LXWXH)
OUTPUT	SIGNAL HEAD
PHASE	SINGLE PHASE
NET WEIGHT	30 KG




100 ML TO 1000 ML DOUBLE NOSEL -145

CAPACITY	40-50 BOTTLES/MIN (DEPENDS ON QTY)
POWER CONSUMPTION	20 W
FILLING RANGE	100ML TO 1000ML
GAS PRESSURE	0.4-0.6 MPA
FILLING ACCURACY	1%
FREQUENCY	50 HZ
EXTERNAL DIMENSIONS	100X500X1050 MM (LXWXH)
OUTPUT	SIGNAL HEAD
PHASE	SINGLE PHASE
NET WEIGHT	30 KG



100 ML TO 1000 ML WITH STAND DOUBLE NOSEL -146

CAPACITY	40-50 BOTTLES/MIN (DEPENDS ON QTY)
POWER CONSUMPTION	20 W
FILLING RANGE	100ML TO 1000ML
GAS PRESSURE	0.4-0.6 MPA
FILLING ACCURACY	1%
FREQUENCY	50 HZ
EXTERNAL DIMENSIONS	100X500X1050 MM (LXWXH)
OUTPUT	SIGNAL HEAD
PHASE	SINGLE PHASE
NET WEIGHT	30 KG

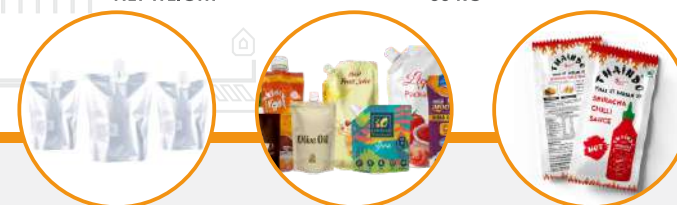



MANUAL PASTE FILLING -151

FILLING RANGE	5 -50
EFFICIENCY (BOTTLE HOUR)	400-500
HOPPER CAPACITY	10L
MACHINE WEIGHT	15KG
EXTERNAL DIMENSION	270*270*700



50 ML TO 500 ML -152

FILLING RANGE	50ML TO 500ML
EFFICIENCY (BOTTLE HOUR)	400-500
HOPPER CAPACITY	10L
MACHINE WEIGHT	35KG
EXTERNAL DIMENSION	270*270*700



100ML TO 1000ML -153

FILLING RANGE	100ML TO 1000ML
EFFICIENCY (BOTTLE HOUR)	400-500
HOPPER CAPACITY	10L
MACHINE WEIGHT	40KG
EXTERNAL DIMENSION	270*270*700



100ML TO 1000ML WITH STAND -154

POWER CONSUMPTION	350 W
DRIVEN TYPE	HYDRAULIC
USAGE/APPLICATION	PHARMA
BRAND	EXTREME
AUTOMATION GRADE	AUTOMATIC
VOLTAGE (V)	220V
PHASE	SINGLE PHASE
MATERIAL	STEEL



100ML TO 1000ML DOUBLE NOZEL -155

BRAND	FILLING MACHINE
AIR PRESSURE	4 - 6 KG
FILLING SPEED	0-50 BOTTLES/MIN
CURRENT	1 A
VOLTAGE	220V +/- 5V
FILLING ACCURACY	+/- 0.5% - +/- 1%
MODEL	SPPF - 1000 D
POWER	10 W
DELIVERY TIME	1- 2 DAYS
PRODUCTION CAPACITY	5000-6000 POUCH/DAY



100ML TO 1000ML DOUBLE NOZEL WITH STAND -156

BRAND	FILLING MACHINE
AIR PRESSURE	4 - 6 KG
FILLING SPEED	0-50 BOTTLES/MIN
CURRENT	1 A
VOLTAGE	220V +/- 5V
FILLING ACCURACY	+/- 0.5% - +/- 1%
MODEL	SPPF - 1000 D
POWER	10 W
PRODUCTION CAPACITY	5000-6000 POUCH/DAY





VACUUM MACHINE 400/500 MM -162

MODEL	400	500
CHAMBER	SINGLE	SINGLE
VOLTAGE (V / HZ)	220/50	220/50
SEALING POWER (W)	500	750
SEALING WIDTH (MM)	10	10
SEALING POSITION OF VACUUM CHAMBER	2	2
VOLUME CHAMBER BULK (LXWXH)MM	440X420X100	530X525X100
SEALING LENGTH (MM)	400	500
AIR CHARGING VOLUME FOR VACUUM PUMP (M3/H)	20	20
MATERIAL FOR VACUUM CASE	FIBRE	FIBRE
DIMENSION (LXWXH) MM	540X480X1010	580X650X1010
WEIGHT (KG)	110	125

** WITH GAS FLUSHING TIMING REGULATION OPTION AVAILABLE



VACUUM MACHINE 600/800 MM -163

MODEL	600	800
CHAMBER	SINGLE	SINGLE
VOLTAGE (V / HZ)	380/50	380/50
SEALING POWER (W)	1000	1250
SEALING WIDTH (MM)	10	10
SEALING POSITION OF VACUUM CHAMBER	2	2
VOLUME CHAMBER BULK (LXWXH)MM	700X620X250	950X680X250
SEALING LENGTH (MM)	600	800
AIR CHARGING VOLUME FOR VACUUM PUMP (M3/H)	20X2	20X2
MATERIAL FOR VACUUM CASE	FIBRE	FIBRE
DIMENSION (LXWXH) MM	760X770X970	950X860X1010
WEIGHT (KG)	150	185

** WITH GAS FLUSHING TIMING REGULATION OPTION AVAILABLE



VACUUM DEEP MACHINE 500 MM -164

MODEL	500	500
CHAMBER DEPTH	130 MM	200 MM
VOLTAGE (V / HZ)	380/50	380/50
SEALING POWER (W)	750	750
SEALING WIDTH (MM)	10	10
SEALING POSITION OF VACUUM CHAMBER	2	2
SEALING LENGTH (MM)	500	500
AIR CHARGING VOLUME FOR VACUUM PUMP (M3/H)	20X2	20X2
MATERIAL FOR VACUUM CASE	FIBRE	FIBRE
DIMENSION (LXWXH) MM	580X650X1010	580X650X1010
WEIGHT (KG)	150	160

** WITH GAS FLUSHING TIMING REGULATION OPTION AVAILABLE



VACUUM DOUBLE CHAMBER MACHINE 400/500 MM -165

MODEL	400	500
CHAMBER	DOUBLE	DOUBLE
VOLTAGE (V / HZ)	440/50	440/50
VACUUM PUMP POWER (W)	1500	1500
SEALING POWER (W)	500	750
SEALING WIDTH (MM)	10	10
SEALING POSITION	2	2
VOLUME CHAMBER BULK (LXWXH) (MM)	510X500X150	580X550X110
SEALING LENGTH (MM)	400	500
MATERIAL FOR VACUUM CASE	SS	SS
DIMENSION (LXWXH) MM	1070X685X930	1260X780X960
WEIGHT (KG)	180	220

** WITH GAS FLUSHING TIMING REGULATION



VACUUM DOUBLE CHAMBER MACHINE 600/800 MM -166

MODEL	600	800
CHAMBER	DOUBLE	DOUBLE
VOLTAGE (V / HZ)	440/50	440/50
VACUUM PUMP POWER (W)	1500	1500
SEALING POWER (W)	1000	1250
SEALING WIDTH (MM)	10	10
SEALING POSITION	2	2
VOLUME CHAMBER BULK (LXWXH) (MM)	720X550X45	950X550X110
SEALING LENGTH (MM)	600	800
MATERIAL FOR VACUUM CASE	SS	SS
DIMENSION (LXWXH) MM	1485X780X930	1850X780X960
WEIGHT (KG)	240	260

** WITH GAS FLUSHING TIMING REGULATION



VACUUM DEEP DOUBLE CHAMBER MACHINE 500/600 MM -165

MODEL	500	600
CHAMBER	DOUBLE	DOUBLE
CHAMBER DEPTH (MM)	130/300	130/300
VOLTAGE (V / HZ)	440/50	440/50
VACUUM PUMP POWER (W)	1500	1500
SEALING POWER (W)	750	1000
SEALING WIDTH (MM)	10	10
SEALING POSITION	2	2
VOLUME CHAMBER BULK (LXWXH) (MM)	580X550X110	720X550X45
SEALING LENGTH (MM)	500	600
MATERIAL FOR VACUUM CASE	SS	SS
DIMENSION (LXWXH) MM	1260X780X960	1485X780X930
WEIGHT (KG)	240	280

** WITH GAS FLUSHING TIMING REGULATION



TABLE TOP VACUUM -167

VOLTAGE	220V / 50 HZ
HEATING POWER	200 W
VACUUM PUMP CAPACITY	10M 3/H
VACUUM PRESSURE	<1.0 KPA
VACUUM CHAMBER VOL. (MM)	385 X 280 X 120
SEALING LENGTH (MM)	260 X 10
NO. OF SEALING STRIPS	1
DIMENSIONS	480 X 330 X 360
WEIGHT	35 KG.



PILLOW VACUUM MACHINE - 168

VOLTAGE	220V/50HZ
WORKING POWER	220V/50HZ
SEAL SIZE	1000*10MM
TABLE SIZE	1000*1000
NUMBER OF SEALS	1 STROKE
HEIGHT	350MM
PACKAGE SIZE	1100*1100MM
EQUIPMENT WEIGHT	260KG



PILLOW VACUUM MACHINE - 168

VOLTAGE	220V/50HZ
WORKING POWER	220V/50HZ
SEAL SIZE	800x10mm
TABLE SIZE	800x800mm
NUMBER OF SEALS	1 STROKE
HEIGHT	350MM
PACKAGE SIZE	900x900mm
EQUIPMENT WEIGHT	180Kg



RIBBON LOCK & FOLLOW -170

VOLTAGE	AC 220V/50HZ
POWER	220 W
MAX PRINTING SPEED	70PCS/MIN
MAX LINE AND WORDS	3(LINE)*12(WORD)
SIZE OF CHARACTER (HEIGHT)	2.5MM,3.5MM
SIZE OF RIBBON AND INK-ROLLER	30MM,35MM
MAX HORIZONTAL SIZE FOR PRINTER	150MM
WEIGHT FOR PRINTER (WITHOUT HORSE)KG	7



TEA VACUUM PACKING MACHINE - 501

VOLTAGE (V/HZ)	220/50 HZ
POWER (W)	120
ELECTRIC CURRRENT (A)	5
EXTERNAL SIZE (L X WXH) (MM)	380 X 320 X 360 MM
WEIGHT (KG)	25



CONTINUOUS GAS FLUSHING/ VACUUM BAND SEALER -502

VOLTAGE (V/HZ)	110/220V/50-60 HZ
FUNCTION	AIR/GAS FLUSHING & BAG SEALING
POWER: MOTOR POWER-50W, FAN-15W, SEALING POWER-220WX2, VACUUM PUMP-370W	TOTAL=875W
SEALING SPEED (M/MIN)	0-12
SEALING WIDTH (MM)	6-12
TEMPERATURE RANGE (DEG. C)	0-300
MAX. THICKNESS OF FILM (MM)	<0.08
MAX. LOADING OF CONVEYOR (KG)	<3
MACHINE SIZE (LXWXH) MM	1025X450X (940+140 ADJUSTABLE)
NET WEIGHT (KG)	85 KG





POWDER AND GRANULE FILLER 10-200GM -171

WORKING VOLTAGE	220 V / 50 HZ
PACKAGING RANGE (G)	10-200G
PACKAGING ACCURACY (G)	+ 1G
PACKAGING SPEED	ABOUT 5-12 BAGS/MINUTE (DEPENDING UPON MATERIAL)
DIMENSION (LXWXH)	500X370X810(MM)
POWER	50 W
MATERIAL	STAINLESS STEEL



POWDER AND GRANULE FILLER 10-999GM -172

WORKING VOLTAGE	220 V / 50 HZ
PACKAGING RANGE (G)	10-999 G
PACKAGING ACCURACY (G)	+ 3G
PACKAGING SPEED	ABOUT 5-12 BAGS/MINUTE (DEPENDING UPON MATERIAL)
DIMENSION (LXWXH)	300X500X1250 (MM)
POWER	50 W
MATERIAL	STAINLESS STEEL



POWDER AND GRANULE FILLER 10-1500GM -173

WORKING VOLTAGE	220 V / 50 HZ
PACKAGING RANGE (G)	10-1500 G
PACKAGING ACCURACY (G)	+ 10 G
PACKAGING SPEED	ABOUT 5-12 BAGS/MINUTE (DEPENDING UPON MATERIAL)
DIMENSION (LXWXH)	350X350X1350 (MM)
POWER	50 W
MATERIAL	STAINLESS STEEL



SIDE SEAL GRANULE FFS MACHINE -174

WORKING VOLTAGE (V/HZ)	220 V/50 HZ
PACKING RANGE	2-100G
PACKING ACCURACY	+ 0.1-0.2G
PACKING SPEED	ABOUT 15-25 BAGS/MIN
HOPPER CAPACITY	4 KG
ROLL SIZE RANGE	16 CM
BAG SIZE RANGE	WIDTH: 8CM, LENGTH 0-16 CM



CENTER SEAL GRANULE FFS MACHINE -175

WORKING VOLTAGE (V/HZ)	220 V/50 HZ
PACKING RANGE	2-100G
PACKING ACCURACY	+ 0.1-0.2G
PACKING SPEED	ABOUT 15-25 BAGS/MIN
HOPPER CAPACITY	4 KG
ROLL SIZE RANGE	16 CM
BAG SIZE RANGE	WIDTH: 8CM, LENGTH 0-16 CM



GRANULE FFS MACHINE 100-1000G -176

WORKING VOLTAGE (V/HZ)	220 V/50 HZ
PACKING RANGE	100-1000G
PACKING ACCURACY	+ 0.1-0.5G
PACKING SPEED	ABOUT 5-20 BAGS/MIN
HOPPER CAPACITY	15 KG
ROLL SIZE RANGE	36 CM
BAG SIZE RANGE	WIDTH: 36CM, LENGTH 0-58 CM





MANUAL HOT STAMPING MAHCINE -181

MODEL	HOT STAMPING MACHINE
VOLTAGE (V/HZ)	AC 220V/50HZ
POWER (W)	220
MAX PRINTING SPEED(PCS/MIN)	0-100
PRINTING QUANTITY	THREE LINE : 2 X4 MAX.
COLOR RIBBON WIDTH(MM)	35
EXTERNAL DIMENSIONS (L X W X H) MM	255 X 225 X 325
NET WEIGHT(KG)	10



SEMI AUTOMATIC HOT STAMPING MAHCINE -182

STAMPING PLATE SIZE	320 X 220MM
BASE PLATFORM SIZE	750 X 650MM (AS PER REQUIREMENT)
HEATER	1.2 KW, SINGLE PHASE
MATERIAL	MS
AUTOMATION GRADE	SEMI-AUTOMATIC
MACHINE TYPE	HOT STAMPING MACHINE
USAGE/APPLICATION	STAMPING



DRYINK CODING MACHINE -183

MATERIAL	STAINLESS STEEL
PRINT SPEED	PRINT SPEED 10-30 PPM
POWER LINE MAXIMUM	3 LINE
TEMPERATURE	UPTO 200°C
PRINT SPEED	10-30 PER MINUTE
VOLTAGE	V10V/ 220V, 50/60HZ
POWER	40W

MADE IN INDIA



HAND OPERATING BENTSAI -184

CHARACTER HEIGHT	1MM-13.5MM
PRINTING LINES	1-8 LINES
PRINTING SPEED	80M/MINUTES (262.5 FEET/MINUTES) ON LINE PRINTING.
PRINTING CONTENT	LOGO, PICTURES, NUMBER, WARD, BARCODE, QR CODE
INK CONSUMPTION	PRINT ABOUT 5, 00,000-20, 00,000 CHARACTER IN 5MM HEIGHT.
PRINTABLE IMAGES	DATE/TIME/EXPIRY DATE, SHIFT CODE, LOT BOX CODE BARCODE COUNTER.
PRINTING DIRECTIONS	360 DEGREE
INK COLORS	BLACK/ BLUE/ GREEN
DIMENSION	(135*128*200MM)
WEIGHT	1.18 KG EXCLUDES CARTRIDGE AND BATTERY.




LAZER INKJET MACHINE -185

PRINTING CONTENT	TEXT TIME...
PRINTING SPEED	70M/MIN
INK COLOUR	BLACK BLUE RED
POWER CONSUPTION	LESS THEN 5W
DIMENSION	120X100X240MM
NET WEIGHT	0.8KG



CONTROL PRINT -186

PRINTING ACCURACY	MAXIMUM: 600DPI * 600DPI VERTICAL OPTIONAL: 100DPI, 150DPI, 300DPI, 600DPI HORIZONTAL OPTIONAL: 30-600 DPI PRECISION ADJUSTMENT
PRINTING HEIGHT	1-12.7MM SINGLE NOZZLE HEIGHT
PRINTING DISTANCE	1-5MM

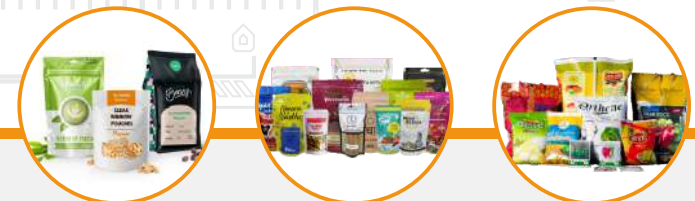



BATTERY POWERED STRAPPING TOOL -191

STRAP WIDTH (MM)	13-16 ADJUSTABLE
STRAP THICKNESS (MM)	0.5-1.0
WEIGHT (KG)	3.9
SIZE (LXWXH) (MM)	375 X130X140
TENSION (KG)	40-200
TYPE OF SEAL	FRICITION WELD
PRESSUURE	N/A
STRAP MATERIAL	PET / PP
BATTERY	UP TO 200 CYCLES WITH ONE BATTERY CHARGE
NET WEIGHT	3.9 KG



PNEUMATIC PET STRAPPING TOOL -192

STRAP WIDTH (MM)	13-19 ADJUSTABLE
STRAP THICKNESS (MM)	1.0-1.5
WEIGHT (KG)	3.8
SIZE (LXWXH) (MM)	275 X115X130
TENSION (KG)	200
TYPE OF SEAL	FRICITION WELD
PRESSUURE	5-7 BAR
STRAP MATERIAL	PET / PP
BATTERY	N/A
NET WEIGHT	3.8 KG



STEEL STRAPPING TOOL -193

STRAP WIDTH	13-16-19 MM
ITEM CODE	A-333
STRAP THICKNESS	0.38-0.58
ITEMS IN PACK	1 PIECE
NET WEIGHT	3.8 KG

*METAL CLIP IS NOT REQUIRED



CAPING MACHINE -194

NO. OF SEALING HEAD ELECTRICAL MOTOR**	1 NOS. 1 HP / 440 VOLTS / 3 PHASE / 50 HZ (FOUR WIRE) FOR MAIN MACHINE
OVERALL DIMENSION	1000 MM (L) X 720 MM (W) X 1400 (H) APPROX.
CASE DIMENSION	1200 MM (L) X 950 MM (W) X 1600 (H) APPROX.



ELECTRIC CAN SEALING MACHINE -195

MATERIAL	IRON
PANEL	PCB
NET WEIGHT	70 KG
DIMENSIONS (MM)	600*340*840
PRODUCTION CAPACITY	25 (TIMES/MIN.)
SEALING SPEED	10-25 PCS/MIN
SEALING WIDTH	39-150 MM (THE WIDTH IS A FIXED VALUE)
POWER CONSUMPTION	150 W
MAXIMUM SIZE OF HEIGHT (MM)	200
MINIMUM SIZE OF HEIGHT (MM)	39



PAD PRINTING MACHINE -196

VOLTAGE	220/50
POWER W	180
PRINTING SPEED	100
OBJECT SIZE	50
PRINTING TYPE	PAD PRINTING
DIMENSION	435X405X560
NET WEIGHT	21





HOT BAR FOOT SEALER -197

SEALING LENGTH (MM)	300	400
SEALING WIDTH (MM)	10 MM	10 MM
INPUT VOLTAGE (V/HZ)	220/50 HZ	220/50 HZ
HEATING TIME (SEC.)	5 SEC.	5 SEC.
IMPULSE POWER (W)	350	350
CASE SIZE (MM)	345X485X880	445X485X880
WEIGHT (KG.)	14	16



FOOT SEALER -198

SEALING LENGTH (MM)	350	450	650	800
SEALING WIDTH (MM)	5	5	5	5
INPUT VOLTAGE (V/HZ)	220/50	220/50	220/50	220/50
HEATING TIME (SEC.)	0~2.5	0~2.5	0~2.5	0~2.5
IMPULSE POWER (W)	1200	1250	1500	1800
CASE SIZE (MM)	450X540X880	550X520X880	700X570X880	855X570X880
WEIGHT (KG)	19	21	24	29



FLEXIBLE CONVEYOR -199

TOTAL LENGTH (MM)	4300 (AFTER EXPANSION)
WIDTH (MM)	600
MIM. HIGHT (MM)	730
MAX. HIGHT (MM)	1100-1200
ROLLER DIA (MM)	50
NO. OF ROLLER	42
GAP BETWEEN EACH ROLLER (MM)	70
MIM. LENGTH (MM)	2100



TURNOVER CONVEYOR -200

LENGTH (MM)	1550MM
WIDTH (MM)	1080MM
HEIGHT (MM)	750MM
SPEED (METER/MIN.)	16-18
MAXI. LOADING (KG)	<60
SUITABLE CARTON	DIAGONAL LENGTH 900MM



FEEDING & STACKING INK JET CONVEYOR -503

BELT LENGTH (MM)	1500
BELT WIDTH (MM)	300
HEIGHT OF CONVEYOR (MM)	750
STRUCTURE TYPE	BELT CONVEYOR
SPEED (R/MIN)	1350
VOLTAGE (V/HZ)	220/50
POWER (W)	90
DIMENSION (L*W*H)	1500*320*750
LOADING CAPACITY (KG)	15





TAPING MACHINE 3" HORIZONTAL TAPE -201

TAPE WIDTH	3" INCH
POWER SUPPLY	1 PHASE 110V/220V/240V
FINISH	POWDER-COATING
PACKING SIZE	MIN L150 X W170 X H110 MM
WORKING TABLE HEIGHT	570~770 MM
SEALING CAPACITY	20 CARTONS PER MINUTE



TAPING MACHINE 2" VERTICAL TAPE -202

TAPE WIDTH	2" INCH
POWER SUPPLY	1 PHASE 110V/220V/240V
FINISH	POWDER-COATING
PACKING SIZE	MIN L150 X W170 X H110 MM
WORKING TABLE HEIGHT	570~770 MM
SEALING CAPACITY	20 CARTONS PER MINUTE




MANUAL CLING R M WRAPPING M/C -203

VOLTAGE	AC 220/50
POWER	300
MAX SEAL WIDTH MM	420
MAX TEM	160
DIMENSION	610X470X120
WEIGHT	6.5
BODY	S S TYPE




MANUAL LABELING MACHINE -204

USAGE/APPLICATION	LABELING
BOTTLE TYPE	ROUND
MATERIAL	LABELING MACHINE
SPEED	20PCS PER MINT
CAPACITY	AS PER CUSTOMER REQUIREMENT

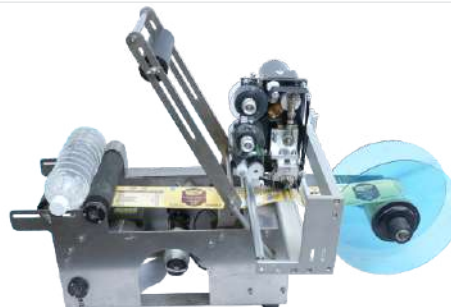

AUTOMATIC ROUND BOTTLE LABELING MACHINE WITH BATCH NUMBER -205

LABEL HEIGHT:.	10MM. TO 160MM.
LABEL LENGTH:	12MM. TO UNLIMITED.
GAP BETWEEN TWO LABELS:	MINIMUM 5 MM.
LABEL ROLL DIA:	300MM.
MAXIMUM. LABEL CORE DIA:	75 MM.
BOTTLE DIA	20MM. TO 120MM.



FLAT BOTTLE LABELING MACHINE (PNEUMATIC) -206

EFFICIENCY	20-40 PCS/MIN.
PRECISION	+1 MM
LABEL SIZE	WIDTH 10-140 MM LENGTH 10-100 MM
LABEL ROLL	EXTERNAL DIAMETER ≤ Ø 300 MM INTERNAL DIAMETER Ø 75 MM
POWER SUPPLY	220 V, 50HZ 120 W
AIR SUPPLY	0.4-0.6 MPA
MACHINE SIZE (LXWXH) (MM)	300X200X400 MM
MACHINE WEIGHT (KG.)	25KG





STRETCH WRAPPING WITH TOP PRESS -211

AUTOMATION GRADE	AUTOMATIC
MATERIAL	STEEL
MODEL NAME/NUMBER	BOX STRETCH WRAPPING MACHINE
VOLTAGE	220 VOLT
PHASE	SINGLE PHASE
SIZE	1447 X 762 X 609 MM
PRODUCT WEIGHT	100 KG
FREQUENCY	50 HZ
DIAMETER OF TURNTABLE	600 MM
WRAPPING SPEED	20 TURNS/MIN



STRETCH WRAPPING WITHOUT TOP PRESS -212

AUTOMATION GRADE	AUTOMATIC WITHOUT TOP PRESS
MATERIAL	STEEL
VOLTAGE	220 VOLT
PHASE	SINGLE PHASE
SIZE	1447 X 762 X 609 MM
PRODUCT WEIGHT	100 KG
FREQUENCY	50 HZ
DIAMETER OF TURNTABLE	600 MM
WRAPPING SPEED	20 TURNS/MIN



AUTOMATIC INDUCTION -213

VOLTAGE	220/50
POWER	2000
AVAILABLE HEIGHT	40-400
SEALING SPEED	2-12 M/MIN
CONVEYOR UNIT BEARING LOAD	20
EXTERNAL DIMENSION	1150X480X400
NET WEIGHT	38



PALLET STRETCH WRAPPING MACHINE -214

MAX WRAPPING SIZE (LXWXH) (MAX)(MM)	(500-1200)X (500-1200)
WRAPPING EFFICIENCY (LOADS/HOUR)	20-40
TURNTABLE SPEED(RPM/MIN)	3-12
TURNTABLE DIAMETER(MM)	Ø 1650/H: 85
TURNTABLE LOADING (MAX)(KG)	2000
ELECTRICAL REQUIREMENT (V/HZ)	220/50
POWER (KW)	TURNTABLE:0.75 FILM, CARRIAGE:0.4; STEEL TOWER:0.37
FILM CARRIAGE CONTROL SYSTEM	PLC
TOP PLATE DEVICE	PNEUMATIC DIRECT TRANSMIT, ORBIT TOP PLATE
MACHINE DIMENSION (MM)	L TYPE:2745 X 1650 X 2700 / H TYPE: 2745 X 1650 X 3300
WEIGHT (KG)	800




BOX STRETCH WRAPPING MACHINE -215

MAX WRAPPING SIZE (LXWXH) (MAX)(MM)	600 X 600 X 600
WRAPPING EFFICIENCY (LOADS/HOUR)	20-40
TURNTABLE SPEED(RPM/MIN)	3-20
TURNTABLE DIAMETER(MM)	H: 600
TURNTABLE LOADING (MAX)(KG)	50
ELECTRICAL REQUIREMENT (V/HZ)	220 / 50
POWER (KW)	TURNTABLE:0.75 FILM, CARRIAGE:0.4; STEEL TOWER:0.37
FILM CARRIAGE CONTROL SYSTEM	PLC
TOP PLATE DEVICE	PNEUMATIC TYPE TOP PLATE
MACHINE DIMENSION (MM)	600 X 4170 X 1800
WEIGHT (KG)	260



100 MM INDUCTION -216

CAPACITY	0-50 PCS/MIN	0-50 PCS/MIN
AUTOMATION GRADE	AUTOMATIC	AUTOMATIC
VOLTAGE	110/220V (50-60HZ)	110/220V (50-60HZ)
POWER	750 W	750 W
SEALING DIAMETER	60-95 MM	60-130 MM
MACHINE WEIGHT	5 KG	5 KG
MACHINE SIZE	340*290*150 MM	340*290*150 MM





HYDRAULIC HAND PALLET TRUCK - NYLON TYRE -301

MODEL	301-2000	301-3000	301-5000
CAPACITY(KG)	2000	3000	5000
MIN. FORK HEIGHT(MM)	85	85	85
MAX. FORK HEIGHT (MM)	195	195	195
LIFTING HEIGHT (MM)	110	110	110
FORK LENGTH(MM)	1150	1220	1220
SINGLE FORK WIDTH(MM)	160	200	160
FORK OVERALL WIDTH(MM)	550	685	685
FORK WHEEL SINGLE(MM)	80x93	80x93	80x93
FORK WHEEL TANDEM(MM)	180x50	180x50	180x50
STEERING WHEEL(MM)	180	180	180
WEIGHT (KG)	65	72	145



HYDRAULIC HAND PALLET TRUCK - PU TYRE -302

MODEL	302-2500	302-3000
CAPACITY(KG)	2000	3000
MIN. FORK HEIGHT(MM)	85	85
MAX. FORK HEIGHT (MM)	195	195
LIFTING HEIGHT (MM)	110	110
FORK LENGTH(MM)	1150	1220
SINGLE FORK WIDTH(MM)	160	200
FORK OVERALL WIDTH(MM)	550	685
FORK WHEEL SINGLE(MM)	80x93	80x93
FORK WHEEL TANDEM(MM)	180x50	180x50
STEERING WHEEL(MM)	180	180
WEIGHT (KG)	70	78



HYDRAULIC HAND TABLE TRUCK SINGLE SCISSOR -303

MODEL	303-150	303-500	303-1000
LOADING CAPACITY	150 KG	500 KG	1000 KG
TABLE DIMENSION (MM)	700*450*35	815*500*50	1200*600*420
MAX. HEIGHT (MM)	720	900	900
WEIGHT (KG)	49	85	115
PACKAGING (MM)	820*480*265	960*530*420	1190*630*430



HYDRAULIC HAND TABLE TRUCK DOUBLE SCISSOR -304

MODEL	304-350	304-500
LOADING CAPACITY	350 KG	500 KG
TABLE DIMENSION (MM)	815*500*50	905*500*50
MAX. HEIGHT (MM)	1300	1500
WEIGHT (KG)	105	136
PACKAGING (MM)	1010*530*390	1190*630*460



DRUM STACKER & TILTER -305

CAPACITY(KG)	350
MAX. LIFTING HEIGHT(MM)	1600
LIFTING SPEED(MM/STROKE)	20
LOWERING SPEED(MM/STROKE)	CONTROLLABLE
FRONT WHEEL SIZE(MM)	\$85X50
REAR WHEEL SIZE(MM)	\$180X50
OVERALL SIZE(MM)	1190X890X2000MM
WEIGHT(KG)	160



DRUM TRUCK -306

CAPACITY(KG)	300
MAX. LIFTING HEIGHT(MM)	400
LIFTING SPEED(MM/STROKE)	20
LOWERING SPEED(MM/STROKE)	CONTROLLABLE
FRONT WHEEL SIZE(MM)	485X50
REAR WHEEL SIZE(MM)	\$180X50
OVERALL SIZE(MM)	1025X915X1180
WEIGHT(KG)	60





HYDRAULIC HAND STACKER -307

MODEL	307-2000	307-2000
CAPACITY (KG)	1000	2000
MAX. LIFTING HEIGHT (MM)	1600	1600
LOWERED HEIGHT OF FORKS (MM)	85	85
FORK LENGTH (MM)	900/1150	900/1150
ADJUSTABLE WIDTH OF FORK (MM)	270-680	270-680
LIFTING SPEED (MM)	14	14
LOWERING SPEED (MM)	Controllable	Controllable
OUTER WIDTH OF FRONT LEGS (MM)	750	750
WEIGHT (KG)	130	160



HYDRAULIC HIGH LIFT PALLET TRUCK -312

CAPACITY	1500
MIN. FORK HEIGHT (MM)	85
MAX. FORK HEIGHT (MM)	800
FORK LENGTH (MM)	1150
FORK OVERALL WIDTH (MM)	685
WEIGHT (KG)	85



ELECTRIC STACKER -308

CAPACITY(KG)	1500
MIN. FORK HEIGHT(MM)	90
MAX. FORK HEIGHT(MM)	3000
FORK WIDTH(MM)	320-695
FORK LENGTH(MM)	1000
BATTERY(V/AH)	12/120
LIFTING MOTOR POWER(KW)	1.5-1.6
TYPE OF MOVING	MANUAL
WEIGHT(KG)	520



PLASTIC TROLLEY 24 X 36 - 309

MATERIAL	STAINLESS STEEL
SIZE	24 X 36 INCH
COLOR	SILVER
CART SIZE	5 INCH
NUMBER OF CASTOR	4 (WITH 2 BRAKES)
WHEEL TYPE	CASTOR WHEEL



IRON TROLLEY 20 X 32 - 310

MATERIAL	STAINLESS STEEL
SIZE	20 X 32 INCH
COLOR	SILVER
CART SIZE	5 INCH
NUMBER OF CASTOR	4 (WITH 2 BRAKES)
WHEEL TYPE	CASTOR WHEEL



MOBILE /SHOP CRANE - 311





ADHESIVE PRINTED TAPES



ADHESIVE NON PRINTED TAPES



AIR BUBBLE POLY BAGS



AIR BUBBLE POLY ROLL



CORRUGATED PAPER REEL



POLYSTER POUCHES



POLYSTER ROLLS



HEAT GUN



HOT AIR GUN BLACK & DECOR



LD/PP/HM NON PRINTED & NON PRINTED POLY BAGS



HDPE TRIPAL



POLYOLEFIN SHRINK FILM



HDPE BAGS



HEAVY DUTY SS STRAPPING BAND ROLL



LD/PP/HM POLYESTER PRINTED ROLLS



PUSH TYPE STRAPPING SEAL



FINE TWINE



PET STRAPPING TOOL



MATERIAL TROLLEY



SHOPPING TROLLEY



SHYAM PLASTIC INDUSTRIES
complete packing solutions

Serving To Industry Since 35 Years



PACKAGING MACHINERY




MATERIAL HANDLING EQUIPMENTS




Visit us online
www.shyampack.in

TO ORDER


The SHYAM PLASTIC INDUSTRIES product selection may vary from one distribution centre to another.
REFER TO YOUR SPECIFIC PRODUCT CODE LIST TO ORDER.



Near SBI Bank, Opposite Oswal Street, Gill Road, Ludhiana-141003, Punjab, India.



Office: +91-161-2538214, 2540918
Works: +91-161-5051808
Mobile No: +91-98762-41555, 98142-15018
WhatsApp: +91-98762-00733



info@shyampack.in
sales@shyampack.in
shyamplastic86@gmail.com