

Incremental encoders

Solid shaft with clamping flange

100...5000 pulses per revolution

EIL580-SC - OptoPulse®



EIL580-SC with clamping flange

Features

- Size ø58 mm
- Precise optical sensing
- Output signal level TTL or HTL
- Clamping flange
- Connection axial, radial or tangential
- Pulses per revolution up to 5000
- High protection up to IP 67
- High resistance to shock and vibrations

Technical data - electrical ratings

Voltage supply	5 VDC ±5 % 8...30 VDC 4.75...30 VDC
Reverse polarity protection	Yes
Short-circuit proof	Yes (HTL) Yes (TTL, max. 1 s and 1 signal)
Consumption w/o load	≤70 mA
Pulses per revolution	100...5000
Phase shift	90° ±10°
Duty cycle	40...60 %
Reference signal	Zero pulse, width 90° ±10 %
Sensing method	Optical
Output frequency	≤300 kHz (TTL) ≤160 kHz (HTL)
Output signals	A+, B+, R+, A-, B-, R-
Output stages	TTL/RS422 HTL/push-pull
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL 508 / CSA 22.2

Technical data - mechanical design

Size (flange)	ø58 mm
Shaft type	ø10 x 20 mm, solid shaft with flat ø3/8" x 4/5" (ø9.525 x 20.32 mm), solid shaft with flat
Admitted shaft load	≤40 N axial ≤80 N radial
Flange	Clamping flange
Protection DIN EN 60529	IP 65 (without shaft seal), IP 67 (with shaft seal)
Operating speed	≤6000 rpm (+20 °C, IP 67) ≤12000 rpm (+20 °C, IP 65)
Starting torque	≤0.015 Nm (+20 °C, IP 65) ≤0.02 Nm (+20 °C, IP 67)
Materials	Housing: aluminium die-cast Flange: aluminium Solid shaft: stainless steel
Operating temperature	-40...+85 °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 30 g, 10-2000 Hz DIN EN 60068-2-27 Shock 300 g, 6 ms
Connection	Flange connector M12, 8-pin Flange connector M23, 12-pin Cable
Weight approx.	300 g

Incremental encoders

Solid shaft with clamping flange
100...5000 pulses per revolution

EIL580-SC - OptoPulse®

Part number

EIL580-S **C** **.A**

Pulse number - see table

Voltage supply / output stages

E 5 VDC, TTL/RS422, 6 channel

H 8...30 VDC, TTL/RS422, 6 channel

N 8...30 VDC, HTL/push-pull, 6 channel

Q 4.75...30 VDC, HTL/push-pull, 6 channel

Connection

R Cable radial, 1 m

L Cable radial, 2 m

F Flange connector M23, 12-pin, radial, male, CCW

B Flange connector M12, 8-pin, radial, male, CCW

T Cable axial, 1 m

U Cable axial, 2 m

D Flange connector M23, 12-pin, axial, male, CCW

A Flange connector M12, 8-pin, axial, male, CCW

P Cable tangential, 1 m

Q Cable tangential, 2 m

Protection

5 IP 65

7 IP 67

Specification solid shaft

U3 $\varnothing 3/8 \times 4/5$ inch ($\varnothing 9.525 \times 20.32$ mm), with flat

10 $\varnothing 10 \times 20$ mm, with flat

Flange

C Clamping flange, centering collar $\varnothing 36$ mm, M3/M4

Printed in **bold** = standard items (up to the quantity of 10 will be supplied within 5 working days).

Pulse number

100	300	720	1250	2500
120	360	800	1440	3000
150	400	900	1500	3600
200	500	1000	1800	4000
250	512	1024	2000	4096
256	600	1200	2048	5000

Incremental encoders

Solid shaft with clamping flange

100...5000 pulses per revolution

EIL580-SC - OptoPulse®

Accessories

Connectors and cables

10127844	Connection cable 2 m shielded with female connector M12, 8-pin, straight (ESG 34FH0200G)
10129332	Connection cable 5 m shielded with female connector M12, 8-pin, straight (ESG 34FH0500G)
10129333	Connection cable 10 m shielded with female connector M12, 8-pin, straight (ESG 34FH1000G)
11053961	Connection cable 2 m shielded with female connector M12, 8-pin, angled (ESW 33FH0200G)
11053962	Connection cable 5 m shielded with female connector M12, 8-pin, angled (ESW 33FH0500G)
10170054	Connection cable 10 m shielded with female connector M12, 8-pin, angled (ESW 33FH1000G)
10164705	Connector M23, 12-pin
11095302	Connection cable 1 m shielded with female connector M23, 12-pin
11100408	Connection cable 2 m shielded with female connector M23, 12-pin
11100430	Connection cable 5 m shielded with female connector M23, 12-pin
11100431	Connection cable 10 m shielded with female connector M23, 12-pin

Mounting accessories

11065915	Coupling CPS25 L=19 d1=04/d2=10
11065918	Coupling CPS25 L=19 d1=07/d2=10
11065920	Coupling CPS25 L=19 d1=08/d2=10
11065921	Coupling CPS25 L=19 d1=09/d2=10
11065922	Coupling CPS25 L=19 d1=10/d2=06
11065923	Coupling CPS25 L=19 d1=10/d2=10
11065924	Coupling CPS25 L=19 d1=10/d2=11
11065925	Coupling CPS25 L=19 d1=10/d2=12
10141132	Spring washer coupling D1=6 / D2=10 (Z 121.C01)
10141133	Spring washer coupling D1=10 / D2=10 (Z 121.C03)
11034138	Spring washer coupling D1=10 / D2=16 (Z 121.C04)
11034140	Spring washer coupling D1=10 / D2=14 (Z 121.C06)
11034141	Spring washer coupling D1=10 / D2=12 (Z 121.C07)
11050507	Bellows coupling aluminium/stainless steel D1=06 / D2=10
11101781	Double loops coupling D1=10 / D2=10

Mounting accessories

10125051	Mounting adaptor for encoders with clamping flange (M3) (Z 119.017)
11065545	Set of eccentric fixings type A
11101893	Tether arm

Matching measuring wheels available as accessories, see under "measuring wheels" (MR).


Incremental encoders

Solid shaft with clamping flange
100...5000 pulses per revolution

EIL580-SC - OptoPulse®

Output signals

Clockwise rotating direction when looking at flange.

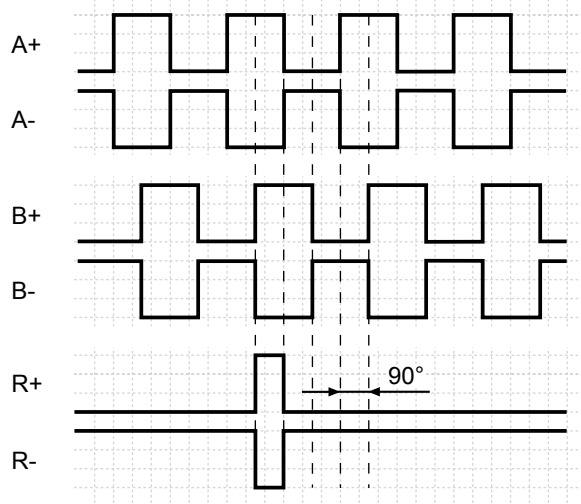

Trigger level

Outputs TTL/RS422

Output level High	$\geq 2.5 \text{ V}$
Output level Low	$\leq 0.5 \text{ V}$
Load	$\leq 20 \text{ mA}$

Outputs HTL/Push-pull

Output level High	$\geq \text{UB} - 3 \text{ V}$
Output level Low	$\leq 1.5 \text{ V}$
Load	$\leq 20 \text{ mA}$


Terminal assignment

Flange connector M23, 12-pin / cable

Pin	Core color	Assignment
1	pink	B-
2	—	—
3	blue	R+
4	red	R-
5	green	A+
6	yellow	A-
7	—	—
8	grey	B+
9	—	—
10	white	GND
11	—	—
12	brown	UB


Screen: Connected to housing

Cable data: PVC, [4x2x0.14 mm²], bending radius
>32.5 mm, outer diameter 6.5 mm



Flange connector M12, 8-pin

Pin	Assignment
1	GND
2	UB
3	A+
4	A-
5	B+
6	B-
7	R+
8	R-




Incremental encoders
Solid shaft with clamping flange
100...5000 pulses per revolution

EIL580-SC - OptoPulse®


Dimensions

Flange connector M12, radial

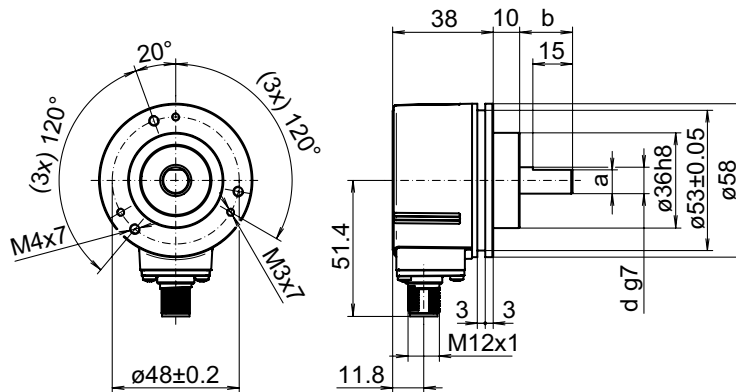


d g7	a	b
ø9.525	8.64	20.32
ø10	9.	20

Flange connector M23, radial

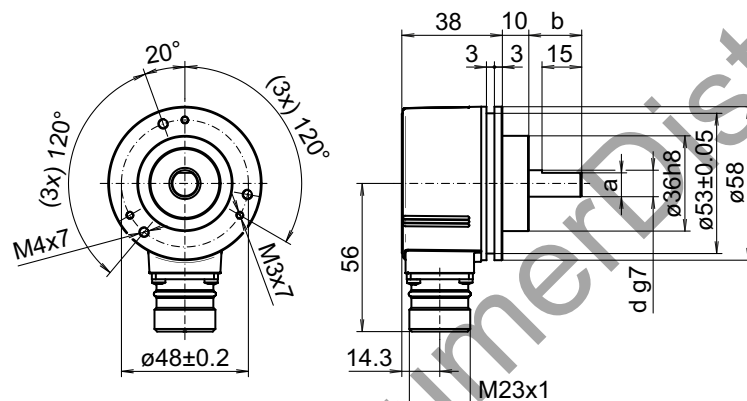

d g7	a	b
ø9.525	8.64	20.32
ø10	9.	20

Cable, radial

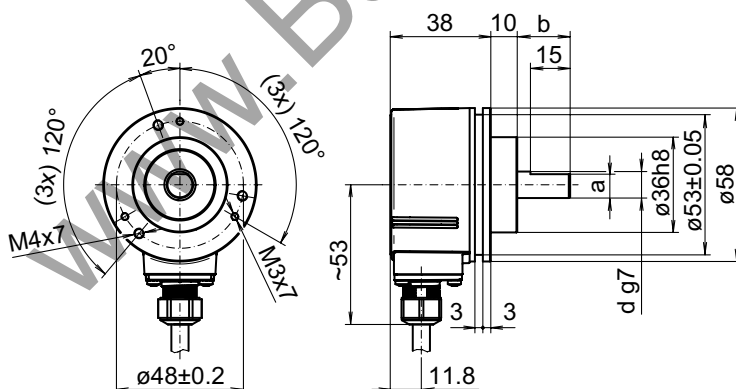

d g7	a	b
ø9.525	8.64	20.32
ø10	9.	20


Incremental encoders

Solid shaft with clamping flange
100...5000 pulses per revolution


EIL580-SC - OptoPulse®

Dimensions


Flange connector M12, axial

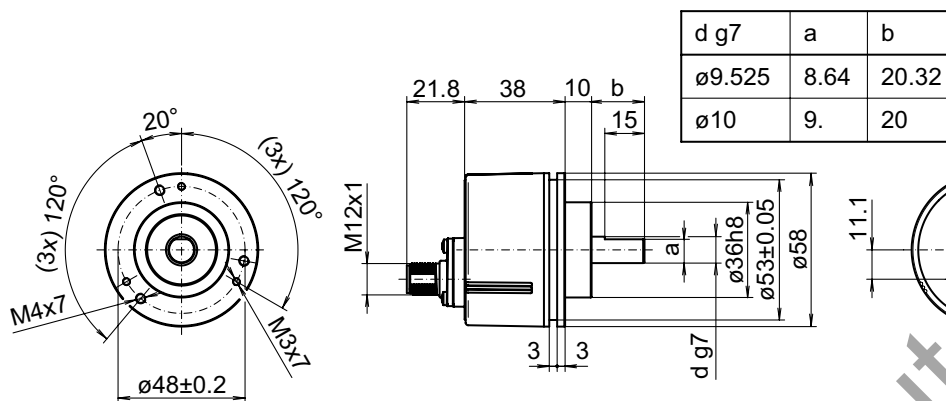

Flange connector M23, axial

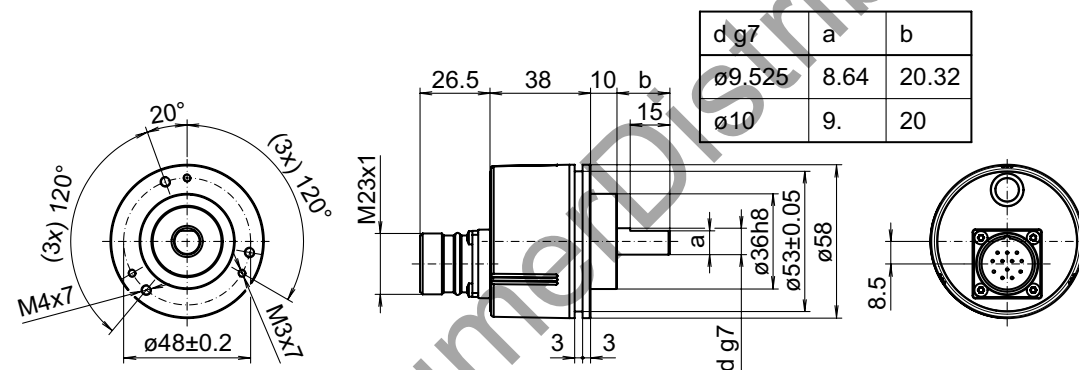

Cable, axial

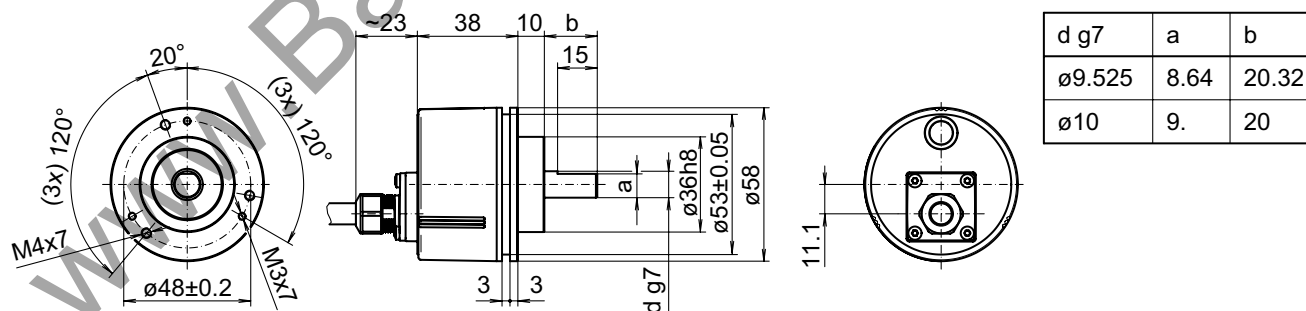

Incremental encoders

Solid shaft with clamping flange
100...5000 pulses per revolution

EIL580-SC - OptoPulse®

Dimensions

Cable, tangential

