
WOODMASTER® BAND SAW BLADES

Noodmaster®C &	Woodmaster®B	39
Noodmaster®CT		40



WOODMASTER® CT

Carbide Tipped Blades For Optimum Performance

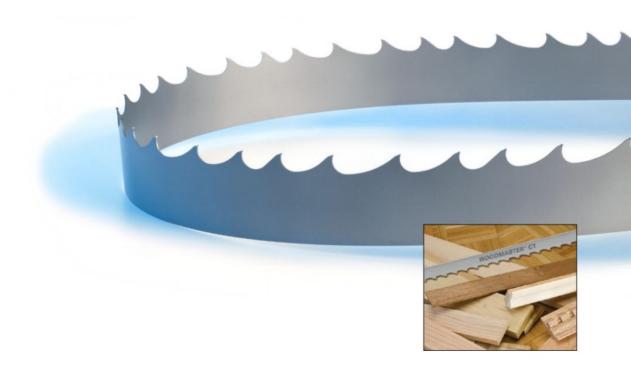

SMOOTH, PRECISE FINISH

Precision ground carbide tooth tips deliver the straightest cuts

ENGINEERED FOR EXTENDED LIFE AND OPTIMAL SPEED

Effectively cuts exotic or difficult to machine wood

IDEAL FOR SPECIALTY WOOD APPLICATIONS

Designed to cut moulding, hardwood flooring, wood siding, paneling and other millwork applications

EXTREME CUTTING RATES. LONGER BLADE LIFE. MAXIMUM PRODUCTIVITY.

WIDTH X	THICKNESS	KERF	TOOTH SPACING	1/2"	3/4"	VARI- TOOTH®
IN	MM	IN	TPI	2	1.3	.7/1
1 x .035	27 x 0.90	0.051		•	•	
2 x .035	54 x 0.90	0.051			•	
2 x .035	54 x 0.90	0.065				•
2 x .042	54 x 1.07	0.072				•
2 x .042	54 x 1.07	0.085				•

WOODMASTER® C

Carbon Steel Blades For Reliable Performance

DELIVERS STRAIGHT CUTS AT HIGH BAND SPEEDS

Engineered for demanding saw mill and resaw applications


BLADES LAST LONGER AND WEAR EVENLY

One piece carbon steel construction with induction hardened tooth tips

FASTER CUTTING AND INCREASED PRODUCTIVITY

Improved beam strength for high feed rates

WIDTH X TH	IICKNESS	KERF	TOOTH SPACING	1/2"	3/4"	7/8"	1"
IN	MM	IN	TPI	2	1.3	1.1	1
1 x .035	27 x 0.90	0.072		•	•		
1 x .035	27 x 0.90	0.078		•	•		
1-1/4 x .035	34 x 0.90	0.080			•	•	•
1-1/4 x .042	34 x 1.07	0.085		•	٠	•	•
1-1/2 x .042	41 x 1.07	0.085			•	•	•
2 x .035	54 x 0.90	0.090			+		•
2 x .045	54 x 1.14	0.091			+	•	•



WOODMASTER® B

Precision Engineered Bi-Metal Blades

CUTS FASTER AND LONGER THAN ONE-PIECE CARBON STEEL BLADES

Two-piece steel construction provides excellent blade life

INCREASED HEAT AND WEAR RESISTANCE

Cobalt rich, high-speed steel tooth tips

INCREASED BEAM STRENGTH FOR LONGER FATIGUE LIFE

Durable spring steel backing material

DELIVERS CONSISTENT, RELIABLE PERFORMANCE

WIDTH X TH	IICKNESS	KERF	TOOTH SPACING	1/2"	3/4"	7/8"	1"	1-1/4"	VARI- TOOTH®
IN	MM	IN	TPI	2	1.3	1.1	1	.78	1.0/1.3
1 x .035	27 x 0.90	0.072		•	•				
1-1/4 x .035	34×0.90	0.072			•	•	•		
1-1/4 x .042	34 x 1.07	0.080			•	•	•		
1-1/2 x .050	41 x 1.27	0.092				•			
2 x .042	54 x 1.07	0.085					•		
2 x .050	54 x 1.27	0.090						•	
2 x .050	54 x 1.27	0.092							+
3 x .050	80 x 1.27	0.100						•	



LENOX USA WOODMASTER CARBIDE TIPPED AND WOODMASTER BIMETALIC BLADE PRICE 22.5.22

			SELLING PRICE
SR NO	DESCRIPTION	BLADE SIZE	(PER FOOT)
		27 MM WIDTH X 0.9 MM THICKNESS X 1.3 TPI	160
		34 MM WIDTH X 0.9 MM THICKNESS X 1.1 TPI	185
1	1 BIMETALIC	34 MM WIDTH X 1.07 MM THICKNESS X 1.1 TPI	210
		34 MM WIDTH X 1.07 MM THICKNESS X 1.3 TPI	185
		54 MM WIDTH X 1.07 MM THICKNESS X 1 TPI	340
WOODMASTER CT	WOODMASTER CT	27 MM WIDTH X 0.9 MM THICKNESS X 1.3 TPI	485
	(CARBIDED TIPPED)	54 MM WIDTH X 1.07 MM THICKNESS X 0.7/1 TPI	720
		54 MM WIDTH X 0.9 MM THICKNESS X 1.3 TPI	655

TERMS: 1. Courier charge will be extra

- 2. GST @18% will be extra
- 3. Blade delivery within 7 to 10 days after your full payment with PO
- 4. blade will be deliver subject to availability of stock in company
- 5. Blade order will not cancel in any case after your payment and PO