


Premium

- PVC WIRING CHANNELS (CABLE DUCTS)
- PVC TRUNKING (CABLE TRUNKING)



A Commitment To Achieve Innovative Quality

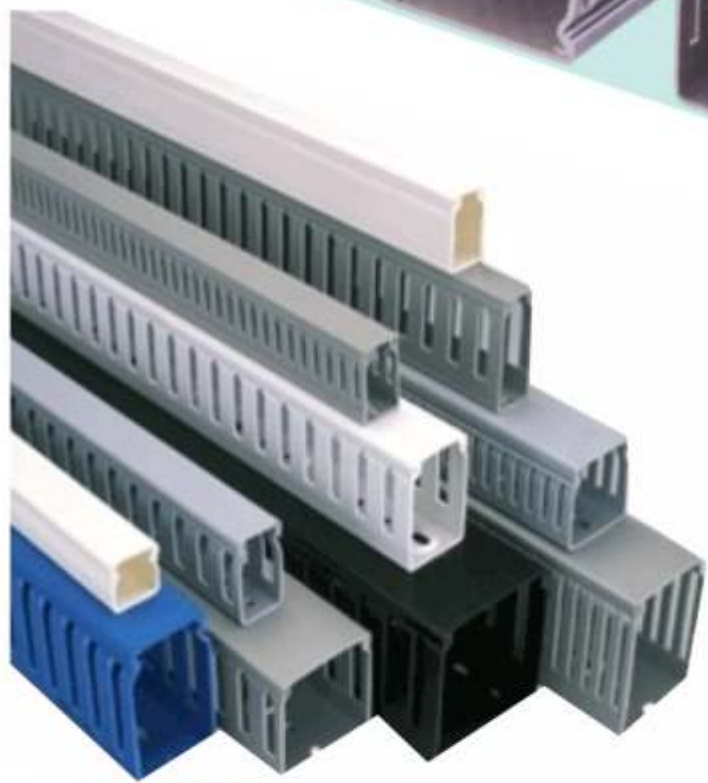

MARUTI PROFILE INDUSTRIES

■ **MATERIAL :**

Rigid Polyvinyl Chloride

■ **COLOUR / LENGTH :**

Grey / One Metre

■ **MECHANICAL PROPERTIES:**

Tensile Strength - 320kg/cm
Izod Impact Strength - 7kg/cm

■ **ELECTRICAL PROPERTIES :**

Dielectric Strength - 16kv/mm
Specific Resistance - 6.1×10^9 ohm.o

■ **TEHRMAL PROPERTIES :**

Flammability - UL94V-0

■ **APPLICATION :**


Wiring Of Control Panel, Ducting,
Lift Hoise Way Wiring , Computer
Lan Wiring And
Tele-communication Wiring Etc.

■ **OPTION :**


Apart from above, we can supply
as per you specification, design,
drawing, colour and cut lenght.

Sr. No.	Size HxW (mm)	Available in type		Std Pkg (Per Box)
		PII	PIII	
1	15X15	✓	✗	200MTRS
2	25X25	✓	✗	120MTRS
3	30X25	✓	✓	100MTRS
4	40X30	✓	✗	100MTRS
5	45X25	✓	✓	120MTRS
6	45X45	✓	✓	90MTRS
7	45X60	✓	✗	50MTRS
8	60X25	✓	✓	90MTRS
9	60X45	✓	✓	80MTRS
10	60X60	✓	✓	55MTRS
11	75X25	✓	✗	72MTRS
12	75X45	✓	✗	48MTRS
13	75X60	✓	✗	40MTRS
14	75X75	✓	✗	30MTRS
15	80X25	✗	✓	50MTRS
16	80X40	✗	✓	48MTRS
17	80X45	✗	✓	48MTRS
18	80X60	✗	✓	30MTRS
19	80X80	✗	✓	30MTRS
20	100X100	✓	✗	20MTRS

TYPE - P-II



TYPE - P-III




We Introduce ourselves as manufactures of **Premium - MPI Brand** of high Quality PVC Channels. We adhere to International standard in all processes of manufacturing, thus ensuring a product which meets the highest level of Quality & Safety.

- Mode of Rigid PolyVinyl Chloride (PVC) of high tensile & Compressive Strength.
- Highly Durable, will not crack, peel or chip, also resistant to Oil, Fungus, Salt Solution etc.
- Non Britte, Non Inflammable and also Warp Proof
- Fast & Efficient lockign Guaranteed because of Specially Designed Duct & Cover.
- Slotting Patterns Prevents Wire From Popping up, While Removing Cover.
- Elongated Slots at the Bottom makes flexible mounting Possible.
- Special orders regarding colours, Length or Modification of Existing range can be manufactured as per your Specification on requirement.

■ **Wiring Ducts Cutting Tool :**



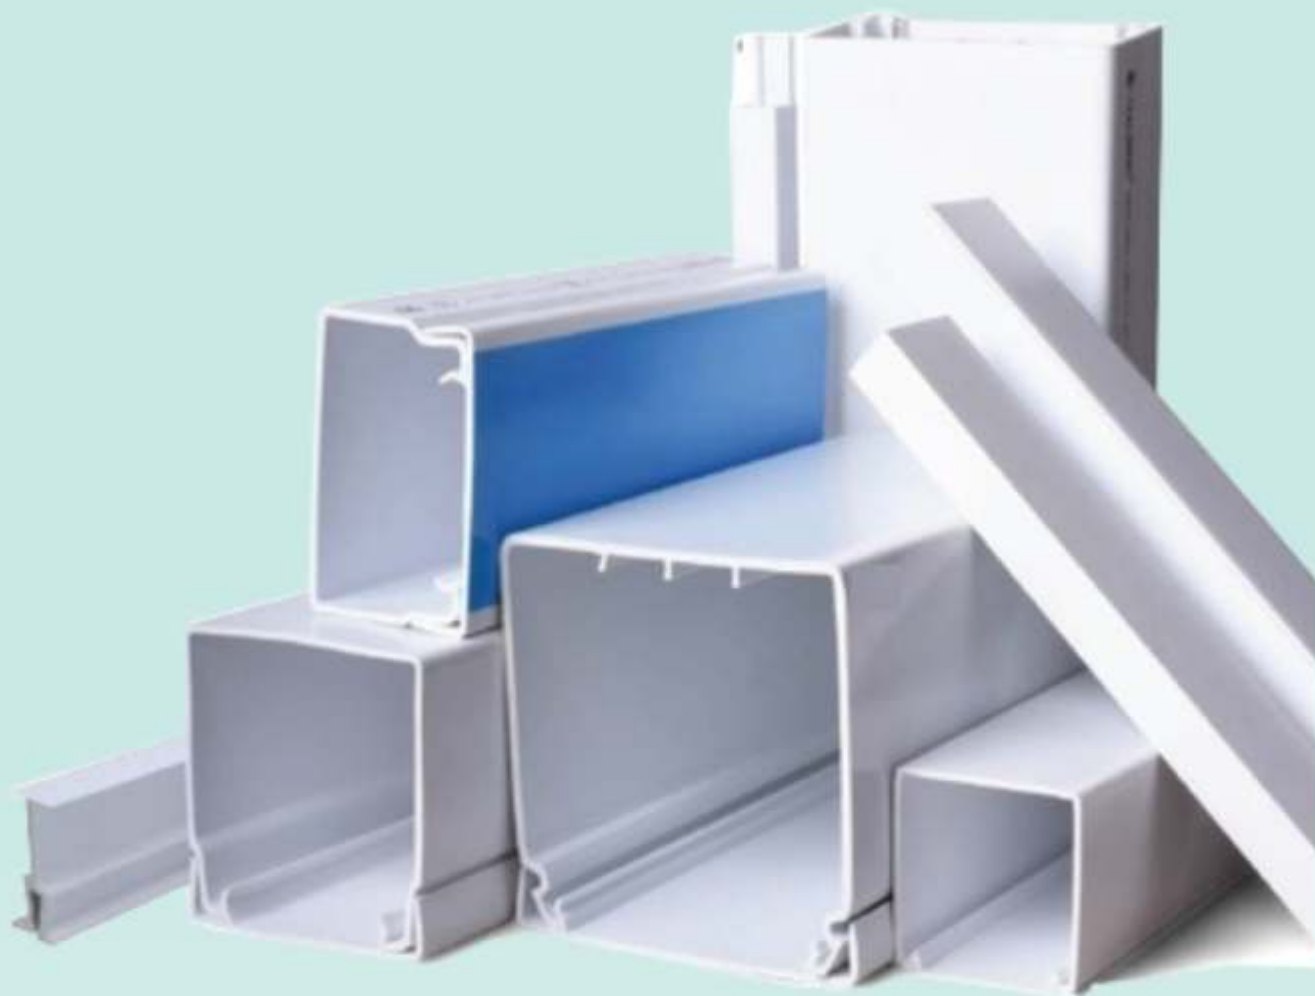

Premium Mini/maxi Trunking Profile And Fittings

Are Manufacture From High Impact Unplasticised Polyvinyl Chloride (UPVC) Grade Material Capable Of Withstanding The Most Hazardous Condition On-site and exceeds the most stringent requirements of indian and international standards. the product range brings a whole new world of sophistication and convenience to home, office and commercial establishments and is in accordance with BS EN 50085-2-1

Application

- To organize and protect cables on surface

Features

- Fast installation and easy maintenance
- Secure and elegant look
- Wide range of sizes to suit all cabling requirements
- Durable and impact resistant
- Fire retardant
- Corrosion free
- Thermal resistant from -5°C to +60°C

UPVC TRUNKING PROFILE	
SIZE W x H (MM)	STANDARD PACK Pc x Mtr
25 x 25	60 x 2m
45 x 45	50 x 2m
50 x 50	30 x 2m
60 x 60	32 x 2m
75 x 50	20 x 2m
75 x 75	18 x 2m
100 x 50	15 x 2m
100 x 100	08 x 2m
150 x 50	10 x 2m

Premium DIN RAILS ARE manufactured according to DIN standards hence accepted throughout the world, allowing the control cabinet designer to mount a wide variety of control panel blocks, on the same rail.

35mm wide DIN rails available in 7.5mm and 15mm deep configuration for light duty application to heavy duty application

premium DIN mounting rails comply with DIN En60715, DIN50022, DIN50035 Standards. DIN Mounting rails are made of cold rolled unalloyed low carbon steel, skin passed after annealing & as per DIN EN 10130 & past electro plated acc. to DIN 50961 with homogenous zinc layer & thick film of trivalent chromate passivation (RoHS)

post electroplating protect the DIN mounting rail against corrosion including all cut edges.

35/7.5/PERFORATED



35/15/PERFORATED



FLEXIBLE POLYAMIDE CONDUIT

S.No	Size	Inner Diameter	Outer Diameter	Standard Packing
1)	Pg7	6.5 mm	10.0 mm	100 Mtrs
2)	Pg9	10 mm	13.0 mm	100 Mtrs
3)	Pg11	12.0 mm	15.8 mm	50 Mtrs
4)	Pg13.5	14.5 mm	18.5 mm	50 Mtrs
5)	Pg16	16.0 mm	21.2 mm	50 Mtrs
6)	Pg21	21.9 mm	28.5 mm	50 Mtrs
7)	Pg29	27.8 mm	34.5 mm	25 Mtrs
8)	Pg36	36.0 mm	42.5 mm	25 Mtrs
9)	Pg48	48 mm	54.5 mm	25 Mtrs

Please do call on us with your queries, it would give us immense pleasure to be of service to you.



MARUTI PROFILE INDUSTRIES



CONTACT Us

Address : 21, Revabhai Estate-2, CTM, Ahmedbad-380026 Guj.india
Phone : +91 -79-25851597, (M) +91 9327000309, +91 9998314619
Website : www.marutiprofile.com
E-mail : marutiprofileindustry@yahoo.in



MARUTI FLEXOPLAST INDUSTRIES
 (Group Company of Maruti Profile Industries)

Plot No 3/B, Ground Floor, Revabhai Estate, Part-2, CTM, Ahmedabad, Gujrat, 380026
E-mail : marutiprofileindustry@yahoo.in, marutiflexoplastindustries@gmail.com

Mo : 9327000309 / 9998314619

