

www.gorecycle.in

GoRecycle

Plastics and Compound

Member of-



The Plastics Export
Promotion Council

HDPE

High Density

Polyethylene Compound

Colour- Black, White, Green, Blue, Yellow, Red

PARAMETER	MELT FLOW INDEX (g/10')	DENSITY	FILTRATION	CARBON BLACK
LIMIT	0.3-2.5	0.950-0.965	100um	1%-2% (Only Black Colour)
APPLICATION	Extrusion Double & Single Wall Corrugated Pipes + Blow Molding			




LLDPE

Linear Low Density

Polyethylene Compound

Colour- Black

PARAMETER	MELT FLOW INDEX (g/10')	DENSITY	FILTRATION	CARBON BLACK
LIMIT	1-2	0.92-0.94	150um	1%-2%
APPLICATION	Extrusion of Pipes & Films			

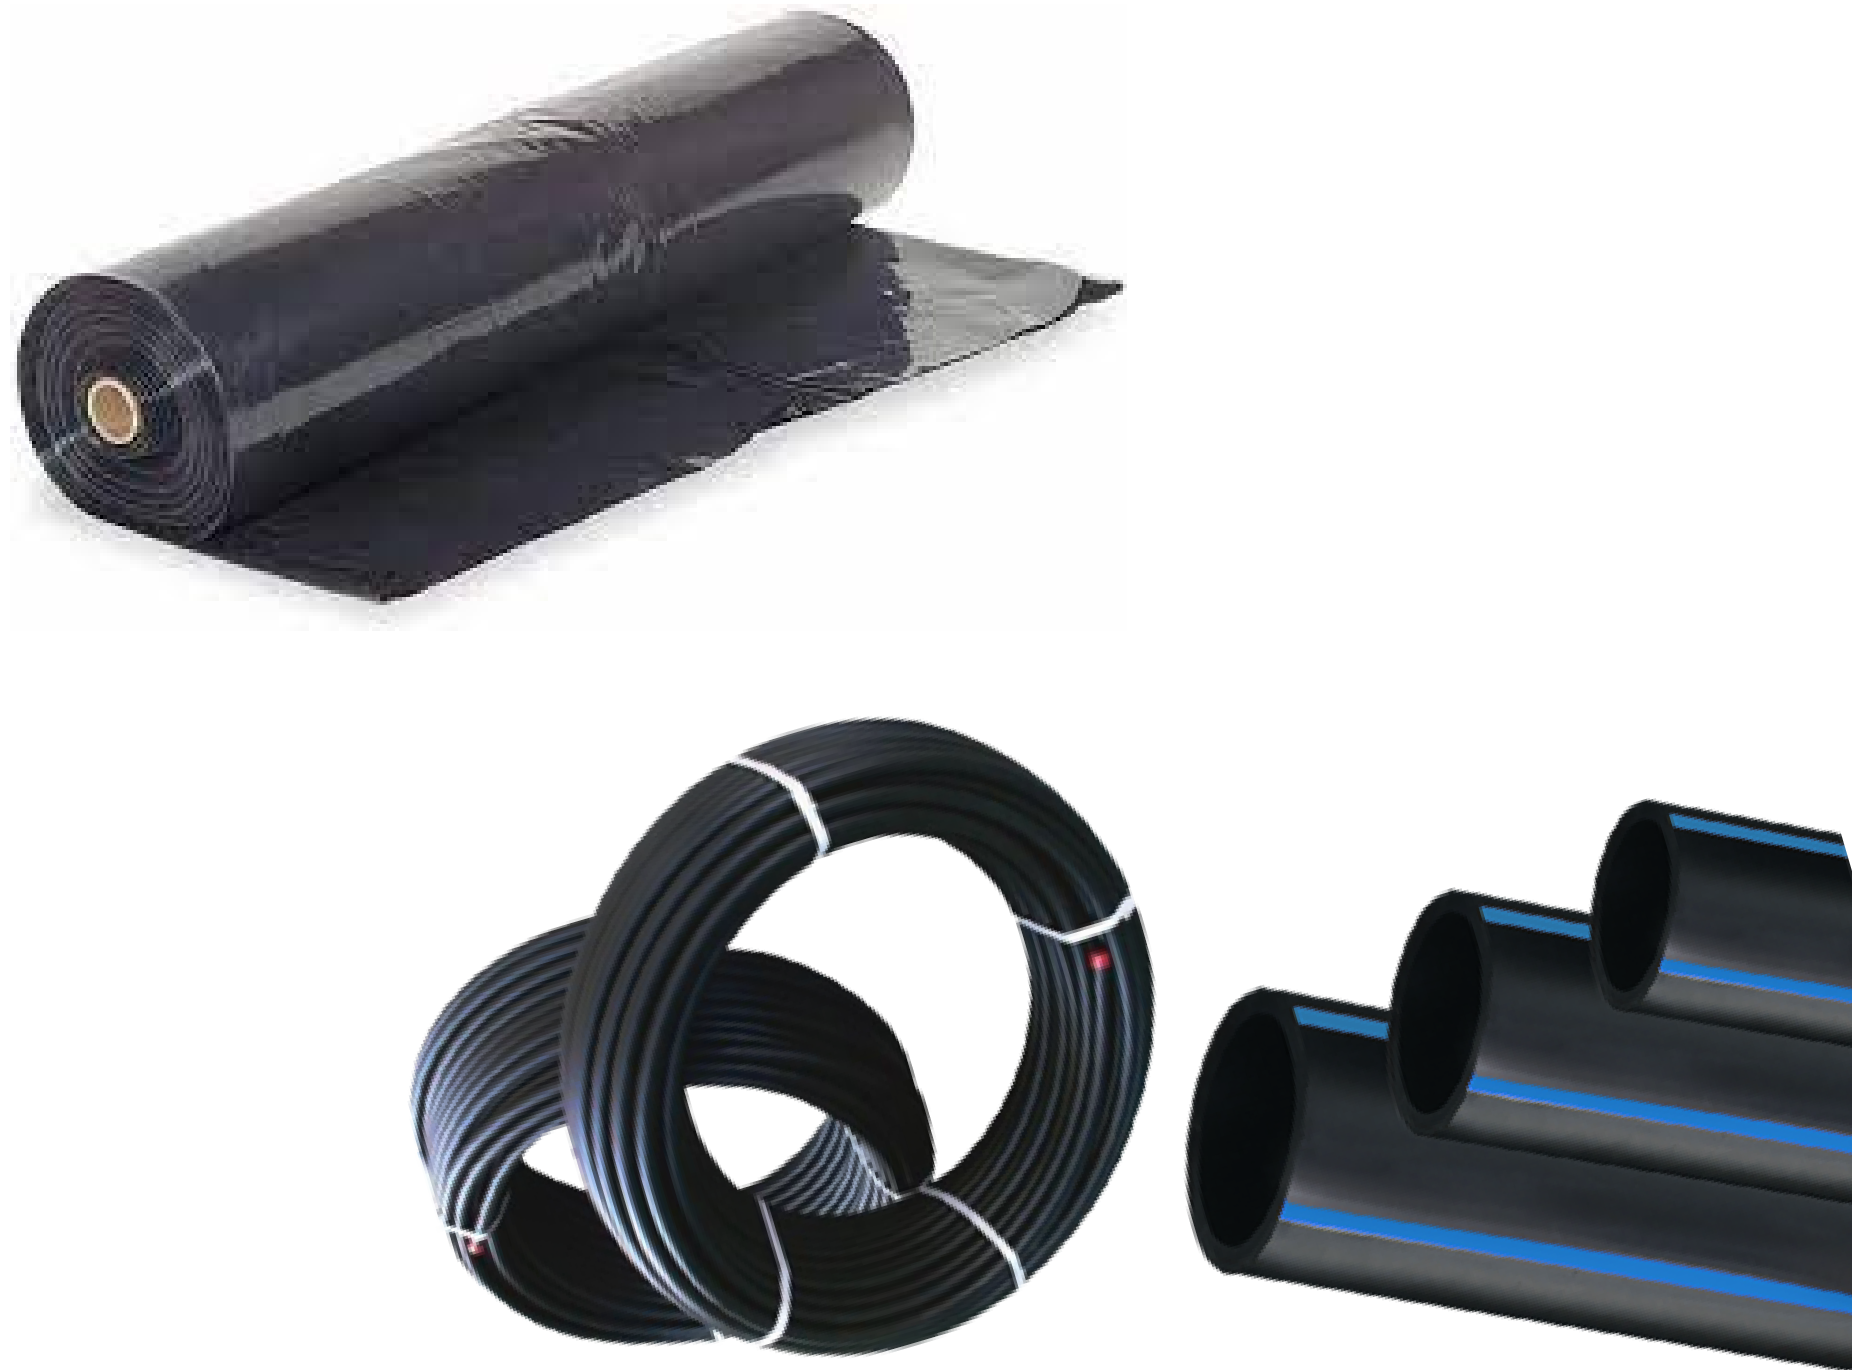

LDPE

Low Density

Polyethylene Compound

Colour- Black, Natural, Mix

PARAMETER	MELT FLOW INDEX (g/10')	DENSITY	FILTRATION	CARBON BLACK
LIMIT	0.5-1	0.92-0.94	100um	1%-2% (Only Black Colour)
APPLICATION	Extrusion of Pipes & Films, Tarpaulin			



HDPE INJ.

High Density
Polyethylene Compound

Colour- Black, Green, Blue, Red

PARAMETER	MELT FLOW INDEX (g/10')	DENSITY	FILTRATION
LIMIT	4-7	0.93-0.95	150um
APPLICATION	Injection Molding		



PP

Polypropylene Compound

Colour- Black, Grey, White, Natural, Red, Blue, Green, Yellow, Pink, Orange

PARAMETER	MELT FLOW INDEX (g/10')	DENSITY	FILTRATION	CARBON BLACK
LIMIT	4-9	0.92-0.94	100um	1%-2% (Only Black Colour)
APPLICATION	Injection Molding			



LDPE

Low Density
Polyethylene Compound

Colour- Grey, Mix

PARAMETER	MELT FLOW INDEX (g/10')	DENSITY
LIMIT	0.5-1	0.98-1
APPLICATION	ACP Sheet	



MAKE IN INDIA



Kh. No.-80 Street No.-4 Ground Floor Samaipur New Delhi-110042

M. +91 9311174274 | www.gorecycle.in | hitesh.gorecycle@gmail.com

