


STANDARDS

VALVE DESIGN	: BS 1868
FACE TO FACE	: ANSI B 16.10
END CONNECTIONS	: ANSI B 16.5
PRESSURE & TEMP RATINGS	: ANSI B 16.34
TESTING STANDARDS	: API 598



Check Valve Lift Type Class 150

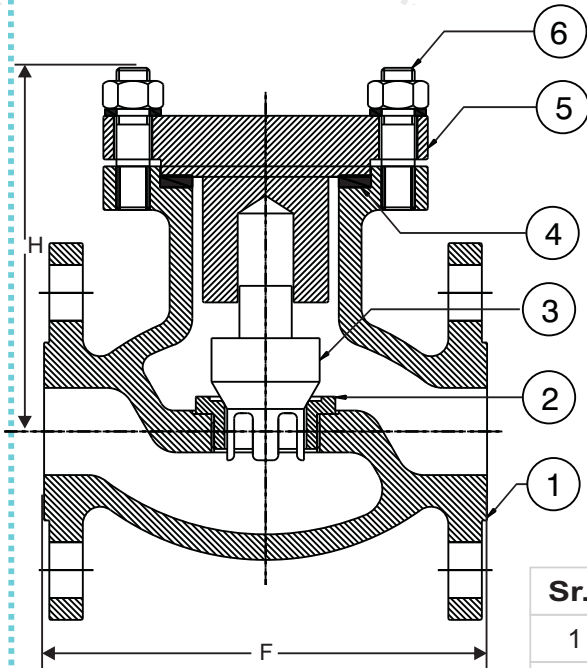

Sr.	Parts Name	Material Specifications
1	Body	ASTM A 216 GR WCB/ A 352 LCB/ A 217 WC6/ A 351 CF8/ A351 CF8M/ A 351 CF3/ A 351 CF3M/ IS 210 Gr. 220
2	Cover	ASTM A 216 GR WCB/ A 352 LCB/ A 217 WC6/ A 351 CF8/ A351 CF8M/ A 351 CF3/ A 351 CF3M/ IS 210 Gr. 220
3	Plug	AISI - 410/304/316.
4	Gasket	CAF - 20/59, Spiral Wound SS With Graphite filler
5	Seat	AISI - 410/304/316.
6	Stud & Nut Washer	ASTM-A-193 Gr.B7, ASTM-A-194 Gr.2H.

SIZE	MM	15	20	25	40	50	65	80	100	125	150	200
	INCH	ø1/2"	ø3/4"	ø1"	ø1.5"	ø2"	ø2.5"	ø3"	ø4"	ø5"	ø6"	ø8"
F		108	117	127	165	203	216	241	292	365	406	495
H		80	84	101.5	114.2	151.5	170	164	186	197	250	267

Note : Standard Material Specifications Can Be Changed According To Service Condition

SAHAJANAND
VALVES PVT LTD



SWASTIK

FLUSH-BOTTOM VALVE

CONTROL VALVE

PRESSURE REDUCING VALVE

SAFETY VALVE

GAS GOVERNOR VALVE

SYMBOLS, DIAMETERS, CONVERSION

MENU

