



STANDARDS

| | |
|-------------------|--------------------------|
| VALVE DESIGN | : BS 5351 (SINGLE PIECE) |
| FACE TO FACE | : GIVEN BELOW IN TABLE |
| END CONNECTIONS | : ASME B 16.11 |
| TESTING STANDARDS | : BS 5146/ API 598 |



Ball Valve Full Bore

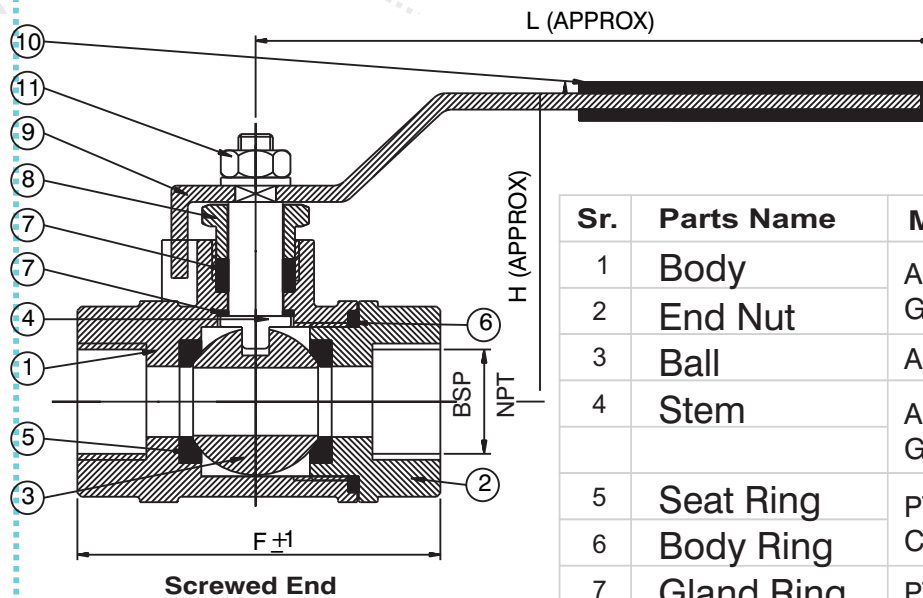

| Sr. | Parts Name | Material Specification |
|-----|--------------|---|
| 1 | Body | ASTM A 216 Gr. WCB / A 351 Gr. Cf8 / A 351 Gr. CF8M |
| 2 | End Nut | ASTM A 216 Gr. WCB / A 351 Gr. Cf8 / A 351 Gr. CF8M |
| 3 | Ball | AISI -202/410/304/316 |
| 4 | Stem | ASTM A 216 Gr. WCB / A 351 Gr. Cf8 / A 351 Gr. CF8M |
| 5 | Seat Ring | PTFE/ Glass Filled PTFE/ Carbon Filled PTFE |
| 6 | Body Ring | PTFE/ Grafoil/ Viton |
| 7 | Gland Ring | AISI 304/316 |
| 8 | Gland Nut | MS/ ASTM A 351 Ca15/ Cf8/ CF8M |
| 9 | Handle | Plastic |
| 10 | Sleeve | ASTM-A-193 Gr.B7, ASTM-A-194 Gr.2H. |
| 11 | Nut & Washer | |

Features :

- Rotary Actuator Can Be Mounted.
- Electro Plating For SS Ball Valves.
- Three Way " L " Port And " T " Port.
- Special Seating Arrangement For Low Torque.
- Fire Safe Design.
- Socket Weld / Butt Weld Ends.

| SIZE | INCH | 1/2" | 3/4" | 1" | 1 1/2" | 2" | 3" |
|------|------|------|------|-----|--------|-----|-----|
| | MM | 15 | 20 | 25 | 40 | 50 | 80 |
| F | | 65 | 76 | 85 | 114 | 125 | 181 |
| H | | 59 | 70 | 80 | 91 | 107 | 143 |
| L | | 139 | 139 | 163 | 205 | 224 | 297 |

Note : Standard Material Specifications Can Be Changed According To Service Condition

SAHAJANAND
VALVES PVT LTD



GATE VALVE

GLOBE VALVE

CHECK VALVE

BALL VALVE

FILTER VALVE

STRAINERS Y TYPE VALVE



[CONTACT US](#)

[GO TO](#)

