


FEATURES

- High Torque Ratings • Large Bore Capacity • Interchangeability
- High Misalignment Capacity

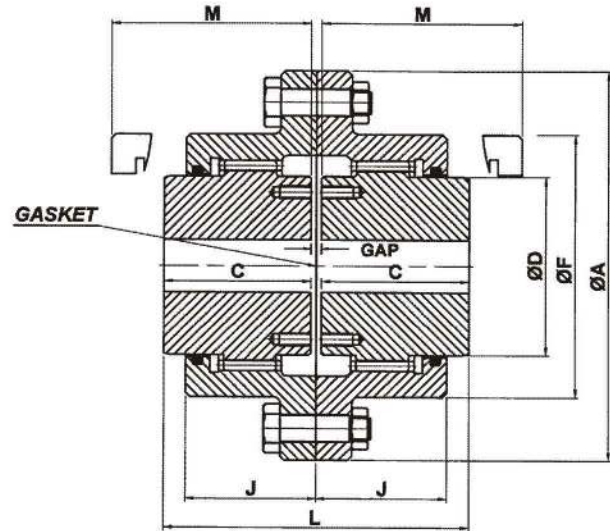

Coupling Size	Coupling Rating		Max. Speed rpm	Bore Dia mm		Dimensions (mm)							Solid Hub		
	kW at 100 rpm	Rated Torque Nm		Min. Bore	Max. Bore	ØA	L	C	ØD	ØF	J	M	GAP	Mass Kg	MI WR ² KGM ²
KGD-10	14	1337	8000	14	52	116	89	43	69	84	39	51	3	4.4	0.0052
KGD-15	30	2865	6500	22	65	152	103	50	86	105	48	61	3	9	0.0192
KGD-20	53	5061	5600	27	80	178	127	62	105	127	60	76	3	15	0.041
KGD-25	105	10027	5000	32	98	213	159	77	131	155	72	92	5	27	0.105
KGD-30	168	16043	4400	42	115	240	187	91	152	181	84	106	5	40	0.195
KGD-35	231	22059	3900	47	135	279	220	107	178	211	98	130	6	65	0.454
KGD-40	336	32086	3600	47	160	318	248	121	210	250	111	145	6	96	0.86
KGD-45	472	45073	3200	52	180	346	278	135	235	274	123	165	8	131	1.39
KGD-50	650	62070	2900	72	195	389	314	153	254	306	141	183	8	186	2.53
KGD-55	880	84034	2650	72	215	425	344	168	279	334	158	203	8	247	3.83
KGD-60	1205	115069	2450	77	235	457	384	188	305	366	169	228	8	299	5.21
KGD-70	1823	174084	2150	92	280	527	451	221	356	425	196	266	9	473	11

Note : *All Dimensions are in mm unless otherwise specified.

Spacer couplings are also available on request.

In view of our constant Endeavour to improve quality of our products, we reserve the right to alter or change specifications without prior notice .