

CUBE|30touch

SED-RATE SYSTEM



TECHNICAL CHARACTERISTICS

POWER SUPPLY 110 to 230 VAC (50 – 60Hz)	MIXING OF SAMPLES in compliance with CLSI and ICSH requirements
ABSORBED ELECTRICAL POWER max 100 W	DIMENSIONS 450 x 390 x 297 mm (w x h x d)
DISPLAY 10,1" wide vertical type	WEIGHT 14 Kg
NOISE LEVEL < 80 Db	WORKING TEMPERATURE + 15° to + 35°C
BAR-CODE READER Automatic internal	RELATIVE HUMIDITY from 20% to 80% without condensation

INSTRUMENTS AND ACCESSORIES

CUBE 30 TOUCH	1	Ref. 10395
TEST DEVICE NEXT 500	500 tests	Ref. 10293
TEST DEVICE NEXT 1K	1.000 tests	Ref. 10294
TEST DEVICE NEXT 5K	5.000 tests	Ref. 10296
TEST DEVICE NEXT 10K	10.000 tests	Ref. 10297
ESR CONTROL CUBE	4 x 9 ml	Ref. 10435
ESR CONTROL CUBE	2 x 9 ml	Ref. 10436
EXTERNAL BAR-CODE READER	1	Ref. 20550510
THERMAL PAPER	1	Ref. 10403



CUBE|30touch

SED-RATE SYSTEM



30 ESR RESULTS
IN 25 MIN WITH MODIFIED
WESTERGREN METHOD



DIESSE Diagnostica Senese SpA
Via del Pozzo, 5 - Loc. San Martino
53035 Monteriggioni (SI) Italy
Ph: +39 0577 319560/61 - Fax: +39 0577 318763 - salesoffice@diesse.it
www.diesse.it



www.rajbiosis.com +91-998-3333-469

INNOVATIVE CLINICAL DIAGNOSTIC SYSTEMS

CUBE130touch

SED-RATE SYSTEM



TEST PERFORMED ON EDTA/CBC SAMPLES


The test is performed on blood samples collected in the same top lavender tubes used for full blood count.

USER FRIENDLY

- Up to 30 samples simultaneously
- Internal bar-code reader
- Ease of use
- Reduction of turn-around time
- Standardization
- Internal mixing of samples by complete inversion of the tubes
- 10 inches colour touch screen
- Innovative graphic interface
- 3 working modes: batch, continuous, mixed
- Fast Turn-Around Time (TAT)
- 30 results in less than 25 minutes

FEATURES

- BATCH/CONTINUOUS WORKING MODE
- TOUCH SCREEN INTERFACE
- REDUCED SIZE
- NO SAMPLE CONSUMPTION
- NO WASTE FLUIDS
- SAFETY

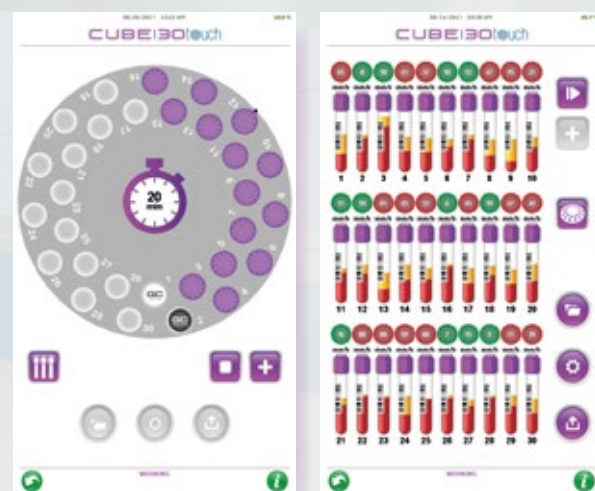

ENVIRONMENTALLY FRIENDLY

No production of waste materials, without extra-cost for liquid waste disposal.



ANALYZE DIFFERENT AND NON-DEDICATED TUBES