


Drawing Of EOT Single Girder

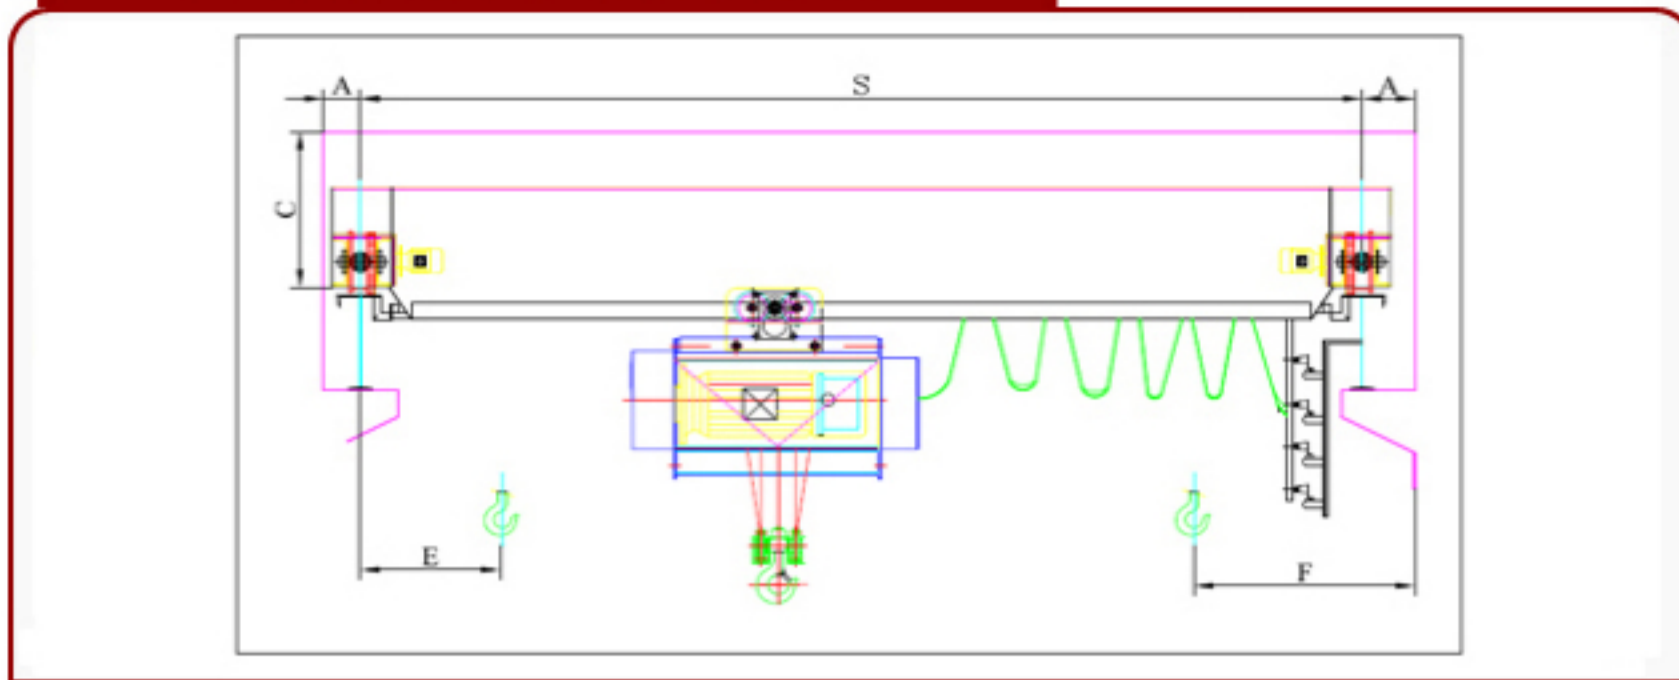

Technical Parameter for Single Girder E.O.T. Cranes

S.W.L. (M.T.)	Span (mtrs.)'s'	Head Room (mm) 'c'	Wheel Base (mm)	Hook Approach (mm) E/F	End Clearance (mm) A	Wheel Load Per Wheel (Approx)
1.	5	750	1800	700	250	0.9
	10	850	2400	700	250	1.02
	15	900	2800	700	250	1.27
2.	5	850	2000	700	270	1.6
	10	950	2400	700	270	1.7
	15	1050	2800	700	270	1.9
	20	1200	3600	700	270	2.3
3.	5	850	1900	800	275	2.07
	10	950	2400	800	275	2.2
	15	1100	2800	800	275	2.6
	20	1300	3600	800	275	3.2
5.	10	1000	2400	900	275	3.5
	15	1250	2800	900	275	4
	20	1350	3600	900	275	4.4
7.5	10	1100	2400	950	300	5.02
	15	1300	2800	950	300	5.5
	20	1500	3600	950	300	6.02
10	10	1200	2400	1000	300	6.5
	15	1400	2800	1000	300	7.1
	20	1550	3600	1000	300	7.6
20	10	1250	2500	1000	300	9.4
	15	1550	3000	1000	300	10.15
	20	1600	4000	1000	300	10.7