

XVIEW

LED X-RAY VIEW BOX

Premium // Deluxe // Economy

Thickness:
25 mm
45 mm
70 mm



LED X-RAY VIEW BOX


All the four sizes comes with dimmer (intensity controller) and film sensor (Auto Switch)



Single Film	1 Dimmer and 1 Sensor
Double Film	2 Dimmers and 2 Sensors
Three Film	3 Dimmers and 3 Sensors
Four Film	4 Dimmers and 4 Sensors

Characteristics:

- Slimmest X-Ray viewer with a thickness of 25mm (Just 1 inch)
- High brightness of more than 7500 Lux, exclusive for viewing detail image freely
- Excellent uniformity of luminance which is more than 90%
- Adopt LED light source with life of 100,000 hours
- Free from flickering, hence reduced eye-fatigue
- Inbuilt power supply
- Wall & table mounted.
- 2 years off-site warranty

Please ask for Customization for modular Operation Theatre

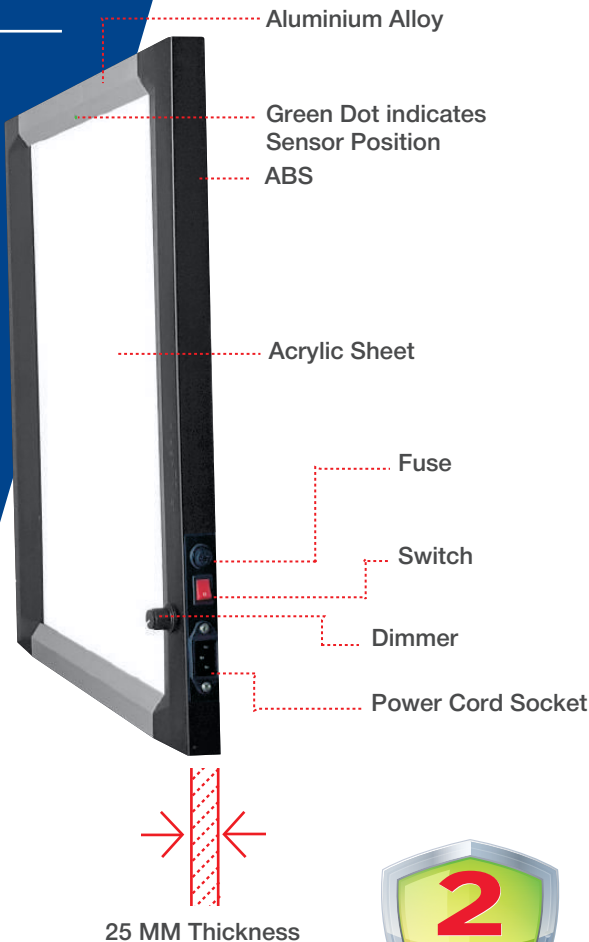

	Parameters			
	Single Film	Double Film	Three Film	Four Film
				
View Area (inches L x H)	14 x 17"	28 x 17"	42 x 17"	56 x 17"
External Dimension (MM) L X H X T	505 x 504 x 25 (MM)	884 x 504 x 25 (MM)	1257 x 504 x 25 (MM)	1635 x 504 x 25 (MM)
Light Source	LED	LED	LED	LED
Colour Temp.	8000K	8000K	8000K	8000K
Brightness	>7500 LUX	>7500 LUX	>7500 LUX	>7500 LUX
LED Life	100,000 Hours	100,000 Hours	100,000 Hours	100,000 Hours
Power	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)
Power Supply	30W	60W	90W	120W

XVIEW DELUXE

LED X-RAY VIEW BOX


All the four sizes comes with dimmer (intensity controller) and film sensor (Auto Switch)

Single Film	1 Dimmer and 1 Sensor
Double Film	2 Dimmers and 2 Sensors
Three Film	3 Dimmers and 3 Sensors
Four Film	4 Dimmers and 4 Sensors

Characteristics:

- X-Ray viewer with a thickness of 45mm (less than 2 inches)
- High brightness of more than 10000 Lux, exclusive for viewing detail image freely
- Excellent uniformity of luminance which is more than 90%
- Adopt LED light source with life of 100,000 hours
- Free from flickering, hence reduced eye-fatigue
- Inbuilt power supply
- Wall & table mounted.
- 2 years off-site warranty

Please ask for Customization for modular Operation Theatre

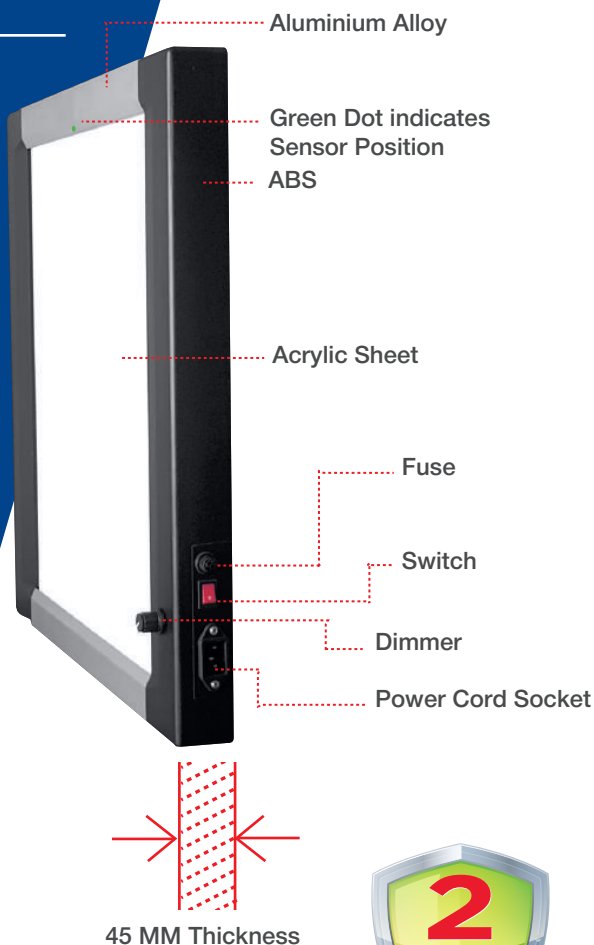


	Parameters			
	Single Film	Double Film	Three Film	Four Film
View Area (inches L x H)	14 x 17"	28 x 17"	42 x 17"	56 x 17"
External Dimension (MM) L X H X T	496 x 512 x 45 (MM)	866 x 512 x 45 (MM)	1217 x 512 x 45 (MM)	1570 x 512 x 45 (MM)
Light Source	LED	LED	LED	LED
Colour Temp.	7000K	7000K	7000K	7000K
Brightness	>10,000 LUX	>10,000 LUX	>10,000 LUX	>10,000 LUX
LED Life	100,000 Hours	100,000 Hours	100,000 Hours	100,000 Hours
Power	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)
Power Supply	40W	80W	120W	160W



LED X-RAY VIEW BOX


Both sizes comes with dimmer
(intensity controller) and film sensor (Auto Switch)

Single Film	1 Dimmer and 1 Sensor
Double Film	2 Dimmers and 2 Sensors
Three Film	3 Dimmers and 3 Sensors
Four Film	4 Dimmers and 4 Sensors

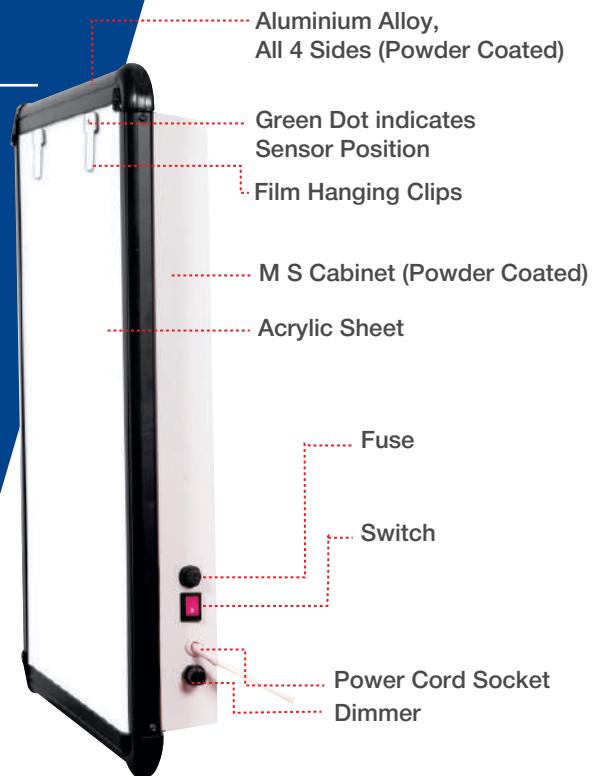

Characteristics:

- X-Ray viewer with a thickness of 70mm (less than 3 inches)
- High brightness of upto 3000 Lux, exclusive for viewing detail image freely
- Excellent uniformity of luminance which is more than 85%
- Adopt LED light source with life of 100,000 hours
- Free from flickering, hence reduced eye-fatigue
- Film hanging clips are made from the best quality of unbreakable plastic
- Inbuilt power supply
- Wall mounted.
- 2 years off-site warranty



Please ask for Customization for modular Operation Theatre

	Parameters			
	Single Film	Double Film	Triple Film	Four Film
View Area (inches L x H)	14 x 17"	28 x 17"	42 x 17"	56 x 17"
External Dimension (MM) L X H X T	423 x 515 x 70 (MM)	773 x 515 x 70 (MM)	1123 x 515 x 70 (MM)	1473 x 515 x 70 (MM)
Light Source	LED	LED	LED	LED
Colour Temp.	6000-6500K	6000-6500K	6000-6500K	6000-6500K
Brightness	UPTO 3000 LUX	UPTO 3000 LUX	UPTO 3000 LUX	UPTO 3000 LUX
LED Life	100,000 Hours	100,000 Hours	100,000 Hours	100,000 Hours
Power	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)	AC 100-270V (47-53 HZ)
Power Supply	10W	20W	30W	40W



Hail Mediproducts Private Limited

Head Office: Plot No.1, 2nd Floor, Commercial Community Centre
Phase-1, Mayapuri Industrial Area, New Delhi-110064, India

Mobile: +91-9810077648
Phone: +91-11-40197171, 40197272
Email: info@hailmediproducts.com

Works: Chandigarh
Plot No.1, Khasra No.923 (2-17)
Chandigarh-Ambala Road
Dappar, Punjab-140506

www.socareindia.com