



# O2FLO High Flow Therapy



Scan for more information.

## Optional Medical Accessories (Individual sales)

| Product Name                                                | P/N                                              |
|-------------------------------------------------------------|--------------------------------------------------|
| High Flow Nasal Cannula (Adult)                             | VANC-01(S) VANC-02 (M) VANC-03 (L)               |
| High Flow Nasal Cannula (Infant)                            | VINC-01 (S) VINC-02 (M) VINC-03 (L) VINC-04 (XL) |
| Autofeed Humidification Chamber                             | VHC60                                            |
| 510-090 Adult Heated Breathing Tube                         | 51006729                                         |
| 510-091 Pediatric Heated Breathing Tube                     | 51006728                                         |
| VUN-200 Temperature Probe<br>(Used for 510-090 and 510-091) | 51006737                                         |
| Heater Connection Cable                                     | 51006736                                         |
| 510-049 Adult integrated heated circuit                     | 51006765                                         |
| 510-050 Pediatric integrated heated circuit                 | 51006766                                         |
| VUN-300 connection cable<br>(Used for 510-049 and 510-050)  | 51006767                                         |
| Oxygen Tube (0.6m PVC tube)                                 | 51006741                                         |
| Filter                                                      | 51006764                                         |

### Sales Office

1st Floor, Building 10, Guantai Biotech Technical Cooperation Center, Songshan Lake Science and Technology Industrial Park, Dongguan Guangdong 523808, China

+86 769 2166 7698 info@inspired-medical.com

### Hong Kong Headquarters

RM B2, 7/F, Phase 2, Hang Fung Industrial Bldg, 2G Hok Yuen Street, Hung Hom, Kowloon, Hong Kong, China

+852 2365 5688 +852 2765 8428



www.inspired-medical.com


### Inspired Medical Japan

302, NAKAGAWA Bldg. 3-31-1 Yushima, Bunkyo-ku, Tokyo 113-0034, Japan

+81 3 5817 8471

# inspired O2FLO™

High Flow Oxygen Therapy is a simple-to-use system that delivers warm, moist gas at high flow rates that generates positive airway pressure. When used at flow rates of 1- 2 L/kg/min it acts as a bridge between Low Flow Oxygen Therapies and Continuous Positive Airways Pressure (CPAP), reducing the need for intubation.

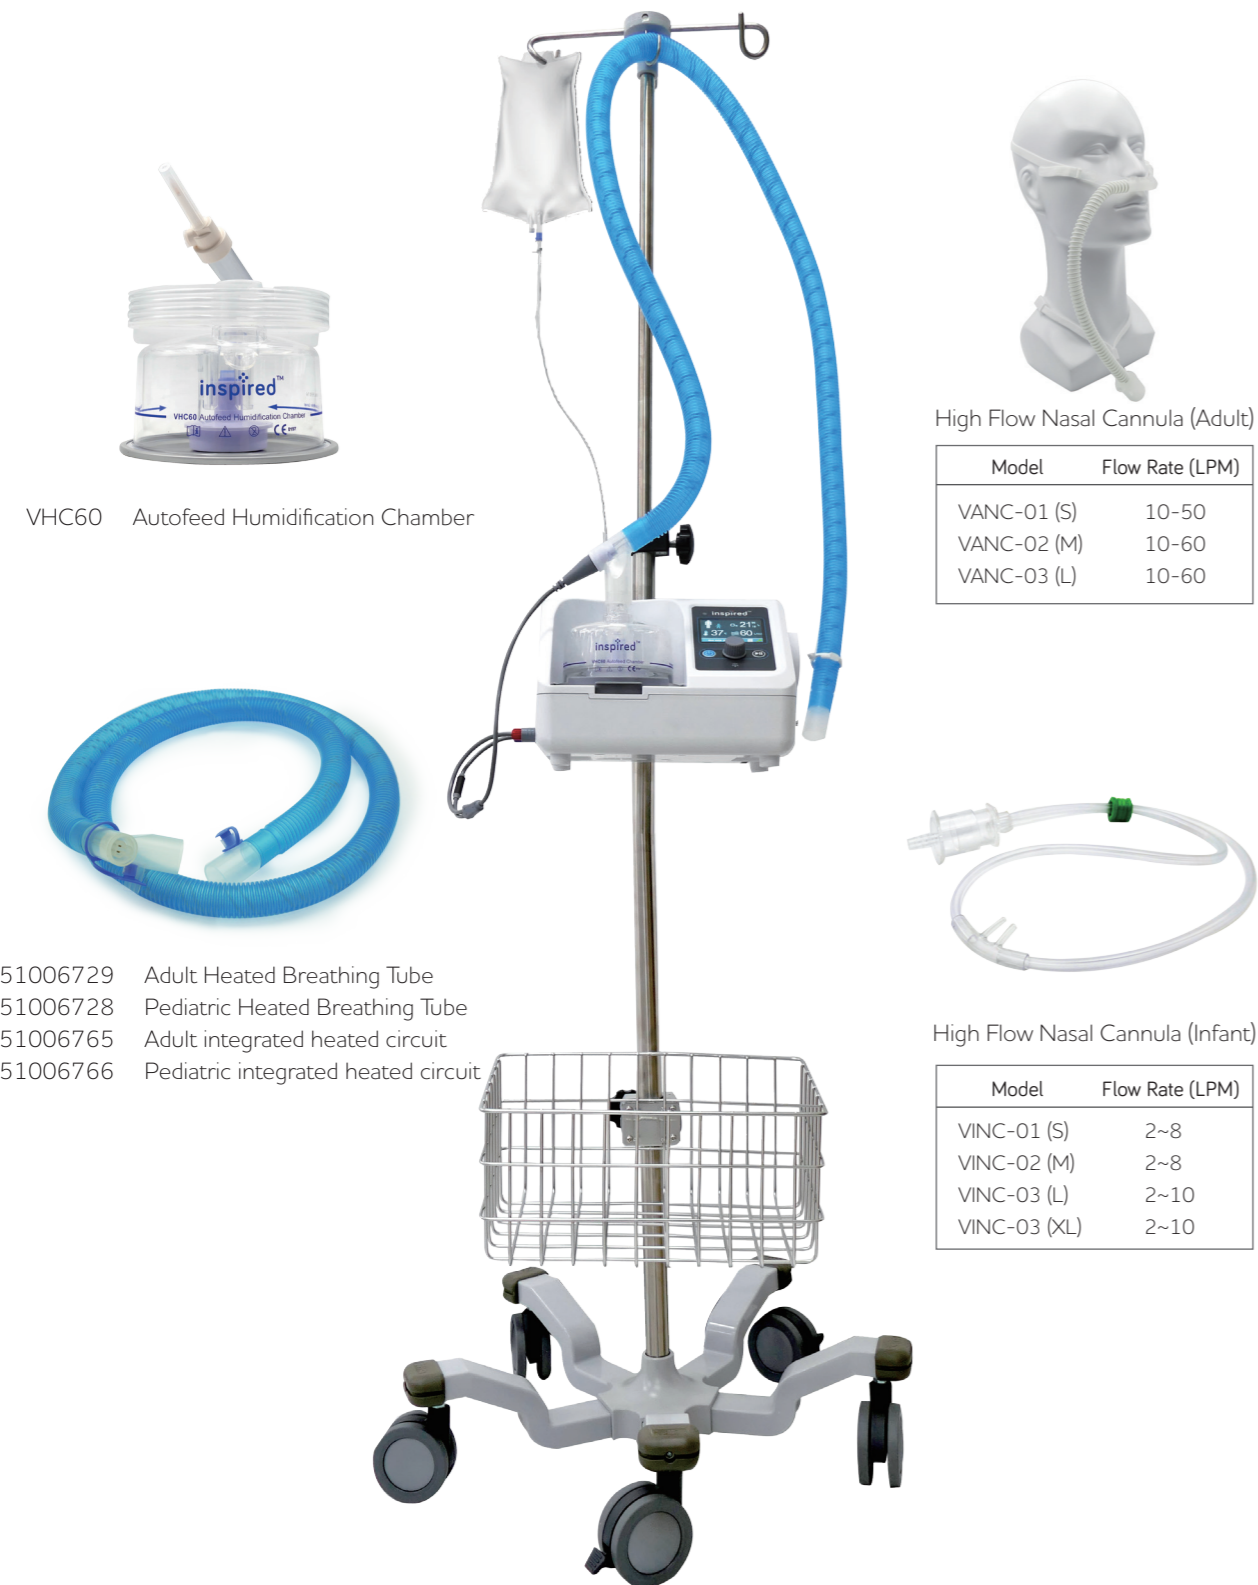

VHC60 Autofeed Humidification Chamber

High Flow Nasal Cannula (Adult)

| Model       | Flow Rate (LPM) |
|-------------|-----------------|
| VANC-01 (S) | 10-50           |
| VANC-02 (M) | 10-60           |
| VANC-03 (L) | 10-60           |

High Flow Nasal Cannula (Infant)

| Model        | Flow Rate (LPM) |
|--------------|-----------------|
| VINC-01 (S)  | 2~8             |
| VINC-02 (M)  | 2~8             |
| VINC-03 (L)  | 2~10            |
| VINC-03 (XL) | 2~10            |

- 51006729 Adult Heated Breathing Tube
- 51006728 Pediatric Heated Breathing Tube
- 51006765 Adult integrated heated circuit
- 51006766 Pediatric integrated heated circuit



| O2FLO Respiratory Unit (MUN-001) |                                                                     |
|----------------------------------|---------------------------------------------------------------------|
| Flow Rate Range                  | 10~60 LPM (Adult Mode)<br>2~25 LPM (Paediatric Mode)                |
| Humidification Output            | Complies with ISO 80601-2-74 standard                               |
| Dew Point Temperature Range      | 31- 37 °C, ±2 °C (Adult Mode)<br>31- 34 °C, ±2 °C (Paediatric Mode) |
| Oxygen Concentration Range       | 21%-95%, Accuracy ±5%                                               |
| Sound Pressure Level             | ≤50 dB(A)                                                           |
| Power Input                      | 100-240V~, 50/60Hz                                                  |
| Net Weight                       | 2.8±0.2kg                                                           |
| Size                             | 243mm x 220mm x 170mm                                               |
| Standard                         | IEC/EN 60601-1, IEC/EN 60601-1-2, ISO 80601-2-74                    |