



S.K. SALES

SAFETY & SECURITY FIRST

**INDUSTRIAL SAFETY, PERSONAL SAFETY
ROAD SAFETY & SECURITY EQUIPMENTS**

Deals with reputed Brands as under



ACMC

3M



Enhancing road safety
and its vision.

It stays
committed
to manufacture
quality

innovative and versatile
road-safety products

Certified by
MSME
MICRO, SMALL & MEDIUM ENTERPRISES



SAFETY CONES

Traffic Cones are made of Resistant Virgin Linear Low Density Poly Ethylene (LLDPE) Et Ethylene Vinyl Acetate (EVA) Polymer. Its chemical Et mechanical properties shall withstand even in bad weather conditions Et in extreme change in temperatures (-10 to 60 degrees). It has High Micro Prismatic Reflective Sleeve Band Type IV (as per ASTMD 4956-09) for excellent night visibility). It also has provision for fixing of Plastic Chain or Caution Message Plate. These are also available with heavy weight base fixed at bottom which makes the cone heavy Et it won't fly off with fast traffic or strong winds.



SKS750 F

Height	750 mm
Base Size	385 x 385 mm
Weight	3.8 Kg
Sleeve Size	4"/6" reflective
Body Colour	Red / Orange
Base Colour	Black
Rubber Fitted	Machine Moulded



SKS750 F

Height	750 mm
Base Size	385 x 385 mm
Weight	4.8 Kg
Sleeve Size	4"/6" reflective
Body Colour	Red / Orange
Base Colour	Black
Rubber Fitted	Machine Moulded



SKS 750 HR

Height	750 mm
Base Size	385 x 385 mm
Weight	5 Kg
Sleeve Size	6" reflective
Body Colour	Red / Orange
Base Colour	Red / Orange
Rubber Fitted	Machine Molding



SKS750

Height	750 mm
Base Size	380 x 380 mm
Weight	1.8 Kg
Sleeve Size	4" reflective
Body Colour	Red
Base Colour	Black



SKS1000 F

Height	1000 mm
Base Size	420 x 420 mm
Weight	5 Kg
Sleeve Size	6" reflective
Body Colour	Red
Base Colour	Black



SKS1000

Height	1000 mm
Base Size	390 x 390 mm
Weight	4.5 Kg
Sleeve Size	6" reflective
Body Colour	Red
Base Colour	Black



SAFETY CONES ACCESSORIES



CONE CONNECTING ROD

MADE OF PLASTIC AND HAVING TWO CIRCLE RINGS ON THEIR ENDS TO HANG ON SAFETY CONES. TS REFLECTIVE IN NIGHT AND DARK WEATHER.



SPRING POST OR FLEXIBLE DELINEATORS

SPRING POSTS by Pioneer Swift are made of UV Resistant special flexible PU material capable to restore to its original state without damage to the vehicle or to the spring post. It has high impact resistance Et tensile strength. Its chemical a mechanical properties shall withstand even in bad weather conditions Et in extreme change in temperatures (-10 to 70 degree celsius). It has High Intensity Micro Prismatic Type IV Reflective Bands (as per ASTM D 4956-09). The Spring Posts are installed by applying epoxy Et nails.

APPLICATION Spring Posts are used at/for Center Lane Dividing, Dangerous U-Turn, Dangerous Medians, Sharp Curves, Construction Zones, No-Entry Zones, Multi-Lanes, Parking Lots, Freeways, Highways Et more.

SKS-934



Height	300 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	1 band
Band Size	75 mm

SKS-935



Height	600 mm
Base Dia	170 mm
Pole Dia	78 mm
Reflective Band	3 band
Band Size	75 mm

SKS-930



Height	710 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	2 bands
Band Size	75 mm

SKS-932



Height	750 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	3 bands
Band Size	65 mm

SKS-988



Height	800 mm
Base Size	200 mm
Pole Dia	80 mm
Reflective Band	3 bands
Band Size	70 mm

SKS-1900



Height	900 mm
Base Dia	200 mm
Pole Dia	80 mm
Reflective Band	4 bands
Band Size	75 mm

RUBBERZIED SPEED BREAKERS

Made of Synthetic Rubber with interlocking sub units make it bind perfectly in one firm bump. The bumps are pre - coloured (Black - Yellow) and UV stabilised. Each sub unit studded with good quality reflective Glass Beads on either side. The bumps are not hollow from back side therefore not need to be filled with concrete base. Directly can fixed with Adhesive (Epoxy and Resin) and Bolts or fasteners.

SKS-1200



Length	250 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	35 Tons

SKS-1014



Length	500 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	40 Tons

SKS-1012




Length	500 mm
Width	425 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	35 Tons

SKS-1013



Length	500 mm
Width	425 mm
Height	75 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	35Tons

SKS-1300



Length	500 mm
Width	400 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	40 Tons


SKS-1400



Length	500 mm
Width	400 mm
Height	75 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	40 Tons



Front



Back

SKS-1201

Length	250 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	40 Tons
Weight	11 Kg

ABS / PE SPEED BREAKERS

SPEED BREAKERS : - Made of ABS (Acrylnitrile - Butadiene - Styrene) / PE (Poly Ethylene) provide with dovetail interlocking sub units make it bind perfectly in one firm bump. The bumps are pre - coloured (Black - Yellow) and UV stabilised. Each sub unit studded with good quality reflectors on either side. The bump are hollow from back side and shall be filled with concrete base and then is to be fixed to ground surface with Adhesive(Epoxy and Resin) and Bolts or fasteners.



SKS1005

Length	250 mm
Width	350 mm
Height	50 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	30 Tons
Colour	Yellow / Black
No. Of Reflectors	2
End Cap	will be extra



SKS1007

Length	500 mm
Width	400 mm
Height	50 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	30Tons
Colour	Yellow / Black
No. Of Reflectors	4
End Cap	will be extra



SKS1006

Length	500 mm
Width	400 mm
Height	75 mm
No. of Pieces Per Meter	2 PC
Load Bearing Capacity	30Tons
Colour	Yellow / Black
No. Of Reflectors	4



SKS1008

Length	250 mm
Width	750 mm
Height	75 mm
No. of Pieces Per Meter	4 PC
Load Bearing Capacity	35Tons
Colour	Yellow / Black
No. Of Reflectors	2

RUMBLERS STUDS AND STRIPS



SKS 1011

Length	500 mm
Width	125 mm
Height	25 mm
Colour	Yellow / Black
No. Of Reflectors	NA
Load Bearing Capacity	15 Tons



SKS 1011A

Length	500 mm
Width	200 mm
Height	15 mm
Colour	White / Yellow
No. Of Reflectors	2 Reflective Strips
Load Bearing Capacity	35 Tons

Portable Speed Breaker



SKS 1011B

Width	350 mm
Open Length	3 meter
Height	40 mm
Colour	Yellow / Black
Handle	Available
Use as	Portable



SKS 1011PU

Length	500 mm
Width	100 mm
Height	15 mm
Colour	Yellow / Black
No. Of Reflectors	NA
Load Bearing Capacity	35 Tons

SKS 900



Length	250 mm
Width	150 mm
Height	32 mm
Colour	Yellow
No. Of Reflectors	2
Load Bearing Capacity	30 Tons

SKS 901



Length	275 mm
Width	150 mm
Height	32 mm
Colour	Yellow
No. Of Reflectors	4
Load Bearing Capacity	35 Tons

SKS 902



Length	270 mm
Width	150 mm
Height	32 mm
Colour	Yellow
No. Of Reflectors	12 Glass Beads
Load Bearing Capacity	60 Tons

SKS 5000

Material	HDPE Plastic
Density of Material	0.950 g/cm3
Height	1000mm
Width	440 mm x 50 mm
Base Overall Shape	450 mm x 600 mm
Advertisement Area	380mm x 600mm
Weight w/o Filling	4 Kgs
Weight with Filling	Upto 20 Kgs
Colour	Grey & Red
Reflective	High reflective advertisement sticker
Portability	Portable & Easy to Move



Application Area : Industrial, Commercial, Construction Sites, Diversion, Area Marking, Warning, Advertisement & Promotion in Outside Retail Stores, Malls, Parking Areas, Airports etc.



ROAD BARRIERS



Size L : 2140XW-400X H-1000 MM
WATER BALLAST : 100 LTR

Lenght	1650 mm
Width	600 mm
Hieght	1000 mm
Colour	Red
Water Capacity	50 ltr.

Key Features:

- > Lightweight make it very easy to install or de - Install even with single person
- > Modular design allows choosing the desired length
- > Tongue & groove interlocking system holds the barrier in place
- > Plank barrier reduces the cost by nearly 40%
- > Stand Barriers are detachable for low transportation cost
- > Provides greater degree of safety than drums
- > Highly visible around work zones with coloured interlocking sections



Available Colours :



BARRIER 2 OVAL

Key Features :

- High impact resistance
- 2 mtr. length works out most economical
- Easy to setup and knockdown
- Interlocking barriers enables continuous lines
- High impact resistant, long lasting colors
- Provision to put reflective markers/Tapes



BARRIER PYRAMID



Size L : 1000xW-490X H-815mm
Water Ballast : 25 ltr.

ROAD BARRIERS

FENCE WITH STAND



Size L: 2010X W-40X H-1010MM



Size L: 400X W-150X H-735MM



Key Features:

- > High Impact Resistant, long lasting colours, UV stabilized PE barriers
- > 2 mtr. length works out most economical
- > Extremely easy to setup and remove
- > Interlocking barriers enables continuous lines
- > Feet can be adjusted 360 degree

Available Colours :



Key Features:

- > Unique double walled structure which saves space and freight cost by 75%
- > No sharp edges or corners, smooth exterior finish deters graffiti
- > Quick and easy to assemble
- > Use of water inside reduces loss of life & damage to vehicles
- > High impact strength, UV stabilized and long lasting colors
- > Finish and colour treatment for high visibility even in work zones with dense infrastructure and manpower.
- > Aids in clear movement guidance for pedestrians and vehicles in hazardous zones.



Available Colours :



BARRIER 6 VERTICAL



Size L: 1610X W-415X H-1020MM
Water Ballast : 60 Ltr.

PVC MESSAGE CONES / BOLLARDS

FOUR HEADED MESSAGE CONES WITH SAFETY SIGNS

We have developed a new line of products which enable operators to follow the latest safety rules and prevent accident at work.

Wholly in plastic . These signs are lights and strong at the time they are hardy, easy to use and robust, and can be easily moved around. If placed outside they resist wind blows.



PLASTIC VIEW CUTTER / ANTI GLARE PANEL SYSTEM FOR HIGHWAYS

Made of durable, flexible, impact resistant plastics. It reduces road accidents by protecting drivers from the flash lights going in the opposite directions. Reverse S Shape Construction

Application :

Highways, Motor Ways, Tool Ways, Freeways, Road Curves, Flyovers, Bridges

Features

Fire retardant temp range - 30 c to + 80 c Flexible & cos saving May be mounted to concrete or steel, easy adjustable of angle, low maintenance, Huge cost savings

Model - RS AG - 900
Colour - Green

Size : 900 mm x 200mm x 5mm


900mm is the most widely used size, resitant to environmental. Factors like sun / rain / snow/ wind



METAL PIPE SAFETY BOLLARD

Meant to guide the traffic installed at crossing / start of central verge diversions etc. Consists of 2/3 plates

Square Plate With 9 Acrylic Reflects
Message Plates (optional)
Round Plate With Hip Retro Reflective Tape Mounted On Powder Coated M.s.pipe

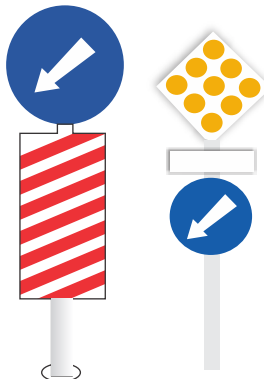

FLUORESCENT REFLECTIVE BOLLARD

Consists of

- Central M.S. Square Rod
- Reflective cylindrical ACP Box
- Powder Coated M.S. Base Plate
- Circular Top Arrow Box



SPECIFICATIONS OF SOLAR TRAFFIC BLINKER - 300mm

- # Solar Cell : Type - Mono Crystalline / Poly Crystalline
- # Voltage : 18V / 450mA.
- # Batter : Type - Plumbic acid, Voltage - 12V / 7.2Ah.
- # LED : Size 5mm, 61 Numbers LED encapsulated in Conves lenses
- # Luminous Intensity : 8000 - 9000 mcd.
- # Colors : Red or Yellow.
- # Operationg Time : Sustain power supply continously for over 4 days when in the wet or rainy days after fully - charging.
- # Also Available in 200 mm



PLASTIC SCISSOR BARRIER

This Scissor Barrier light weighted for easy to carry. The User can adjust the working length as per their choice or according to actual demand. It is pasted with highly reflective sheeting on the strips to reflective in night and plays a good role for warning. The design of side stands can be in filled by water to increase the weight.

SKS B200

Height
Closed length
Opened length
Width
Weight
Weight with water
Colour of stand
Colour of strips

950 mm
250 mm
2500 mm
370 mm
3kgs
upto 7-8 kgs.
Yellow
Red and Yellow



SKSB200A

Height
Closed length
Opened length
Width
Weight
Weight with water
Colour of stand
Colour of strips


950 mm
450 mm
3500 mm
370 mm
5 kgs
upto 8-10 kgs.
Yellow
Red and Yellow



SKS B201

Height
Closed length
Opened length


1 mtr
300 mm
2.7mtr

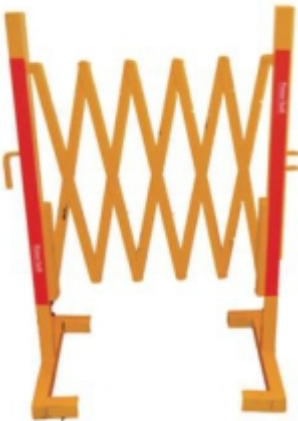

SKS B202

Height
Closed length
Opened length
Wheel Nylon


1 mtr
300 mm
2.7 mtr
2 Nos

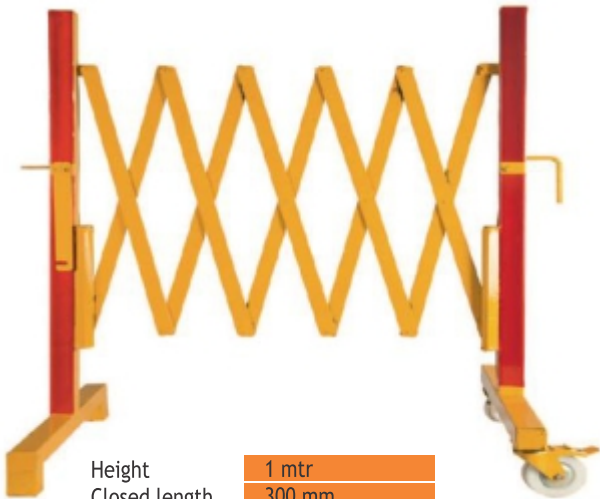

ABS ROAD STUDS / CAT EYES

(ABS) PLASTIC ROAD STUDS: - Raise Reflective Pavement Marker made of Engineering Grade ABS Body with Polycarbonate / Acrylic micro Prismatic reflectors.

 <p>SKS 972 90mm X 100mm X 18mm</p>	 <p>SKS 972A 90mm X 100mm X 18mm with Hole</p>	 <p>SKS 998 100mm - Dia</p>
 <p>SKS 976 100mm X 100mm X 20mm Mesh Type</p>	 <p>SKS 976A 100mm X 100mm X 20mm with Solid Base</p>	 <p>SKS 976B 100mm X 100mm X 20mm with Double Shank</p>
 <p>SKS 979 100mm X 120mm X 20mm Mesh Type</p>	 <p>SKS 979A 100mm X 120mm X 20mm with Solid Base</p>	 <p>SKS 979B 00mm X 120mm X 20mm with Double Shank</p>

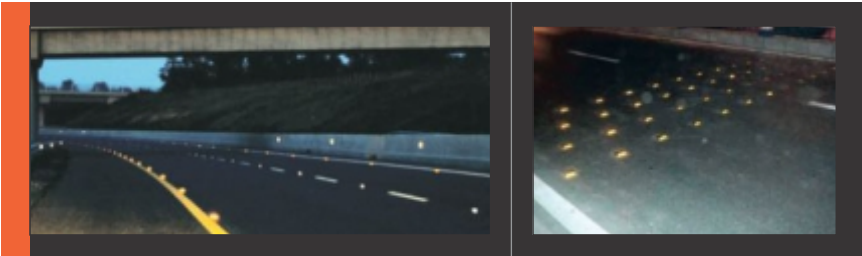




SKS 971P
110mm X 128mm X 30mm



SKS 999
130mm X 150mm X 30mm



SKS 977
100mm X 100mm X 18mm
with 6 Glass Beads



3M REGULAR



3M DOUBLE SHANK



AVERY DENNISON

SOLAR POWERED ROAD STUDS OF ALUMINUM ALLOY WITH 3 LED's EACH SIDE

1. Model No. PS 970 : Aluminium Solar Studs :

The Solar studs have automatic switching on & off system under dark weather and bright conditions & each unit should be completely independent composite unit.

- Construction – Aluminium
100% water proof
Dimension – Apx. 125mm x 125mm x 20mm (Shank Size – 30mm)
One Ni-Mh rechargeable battery (1.2v / 1600mA)
Three super bright LED's on each side with over 5000mcd (Milicandle) luminous intensity.
View Distance – More than 500Mtrs
Bearable weight Capacity – Apx - 10Tons
Working Time – 2 to 3 Days after fully charged battery
Charging time apx – 6Hrs from direct sunlight.
Color of LED's – Amber / Red / Green



SKS 970B



SKS 970A

2. Model No. PS 966 / 967 : Aluminium Solar Flasher & Delineator:


The Solar Power Flasher made of Poly Carbonate cup apx. Dia – 80mm and 90mm height fitted on aluminium base / PE base in such a way that it can be fitted in suitable MS Pipe. The Solar flasher has solar power unit at the top to make it easy for charging in day time and below the solar power unit provide with six Red/Yellow colour LED to blink in the night time.



SKS 966



SKS 966A

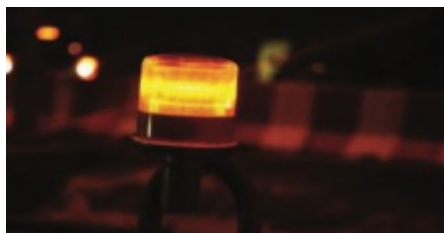

SKS 967

SAFETY ALUMINIUM ROAD STUDS

ALUMINIUM ROAD STUDS: - Raise Reflective Pavement Marker dual Directional made of Aluminum Alloy Body with proper Acrylic or Poly Carbonate Prismatic Reflectors.



SKS 975
100mm X 100mm X 20mm
with Hole



SKS 973
100mm X 100mm X 20mm
with 20mm Shank



SKS 965
100mm X 100mm X 20mm
with 7 x 3 Glass Beads & Hole



SKS 964A
100mm X 100mm X 20mm
with Shank



SKS 620
100mm X 100mm X 20mm




SKS 962
100mm X 100mm X 20mm
with 7 x 3 Glass Beads & Shank



SKS 620
100mm X 100mm X 20mm
with 7 x 3 Glass Beads & Hole



SKS 973A
100mm X 100mm X 20mm
with 43 Glass Beads & Shank



SKS 975A
100mm X 100mm X 20mm
with 43 Glass Beads & Hole

WARNING BOLLARDS & ACCESSORIES

Warning Bollard can be used as unique body or assembled with big sign boards to make barricade. These barricades are widely used in social activities or events as well as construction areas by its clip to extend each other. Collapsed boards can be used for indoor or outdoor areas. It is easy to stack with foldable foot. Weather resistance between -20° to +60° Celsius.

Application: Barriers are used for Lane Dividing, Dangerous Area, Dangerous Medians, Sharp Curves, Constructions Zones, No-Entry Zone, Multi Lanes, Parking Lots and Highway etc.



SKS3000

Height	1200 mm
Pole Dia	100 mm
Base Dia	350 mm
Base Height	75 mm
Reflective Band	4nos x 75mm
Weight	12.5 Kgs
Message Slot	Slot plate at top



SKS 3000A

Height	1300 mm
Pole Dia	100 mm
Base Dia	440 x 440 mm
Base Height	75 mm
Reflective Band	4nos x 75mm
Weight	8.5 Kgs



SKS 3000B

Height	1050 mm
Pole Dia	100 mm
Base Dia	400 x 400 mm
Base Height	40 mm
Reflective Band	1nos x 250mm
Weight	6 Kgs







Also available with Rubberized Base, Weight - 10Kgs

Bollard's Accessories



SKS 3005

SKS 3006

SKS 3007

SKS 3008

WARNING BARRICADING BOLLARDS

Warning Barricading Bollard can be used as unique body or assembled with big sign boards to make barricade and highly visible in night. These barricades are widely used in social activities or events as well as construction areas by its clip to extend each other. Collapsed boards can be used for indoor or outdoor areas. It is easy to stack with foldable foot. The Sign Board of Barricading Bollard is made on ACP (Aluminium Composite Panel) Sheet with HIP (High Intensity Prismatic) reflective tape. We can make any design on board as per yours requirements. Weather resistance between -20° to +60° Celsius.



SKS 3200

Dimension LxH	2000 x 1200 mm
Pole Size	100 x 1200 mm
Sign Board Size	750 x 1200 mm
Weight	35 Kgs
Material	PP-CP Body - PP Base - Reflective sheeting 3mm ACP
Features	Reflective sheeting - sand filled base - wind resistance - water resistance - easy to assemble and dismantle



MEDIAN MARKERS



1. **Model No. PS 960 PLASTIC MEDIAN MARKERS:** - Made up of tough, impact resistant thermoplastic body, reflectorized on both side using appx. 85 x 85mm (for square shape Fluorescent yellow prismatic sheeting (type – XI) reflective surface should be incline to appx. 20 degree to vertical to provide maximum reflective. Height & Width of Median marker is approx 110mm with all fixing arrangements.



2. **Model No. PS 960F PLASTIC FLAP MEDIAN MARKERS:** - Made up of Flexible, impact resistant thermoplastic body, reflectorized on both side using appx. 90 x 100mm (Fluorescent yellow prismatic sheeting (type – XI) reflective surface should be flat to 90° degree to vertical to provide maximum reflective. Height & Width of Median marker is approx 110mm with all fixing arrangements.



3. **Model No. PS 960A MS MEDIAN MARKERS:** - Made up of Moulded Galvanized Sheet, impact resistant MS body, reflectorized on both side using appx. 85 x 85mm (for square shape Fluorescent yellow prismatic sheeting (type – XI) reflective surface should be incline to appx. 20 degree to vertical to provide maximum reflective. Height & Width of Median marker is approx 110mm with all fixing arrangements.

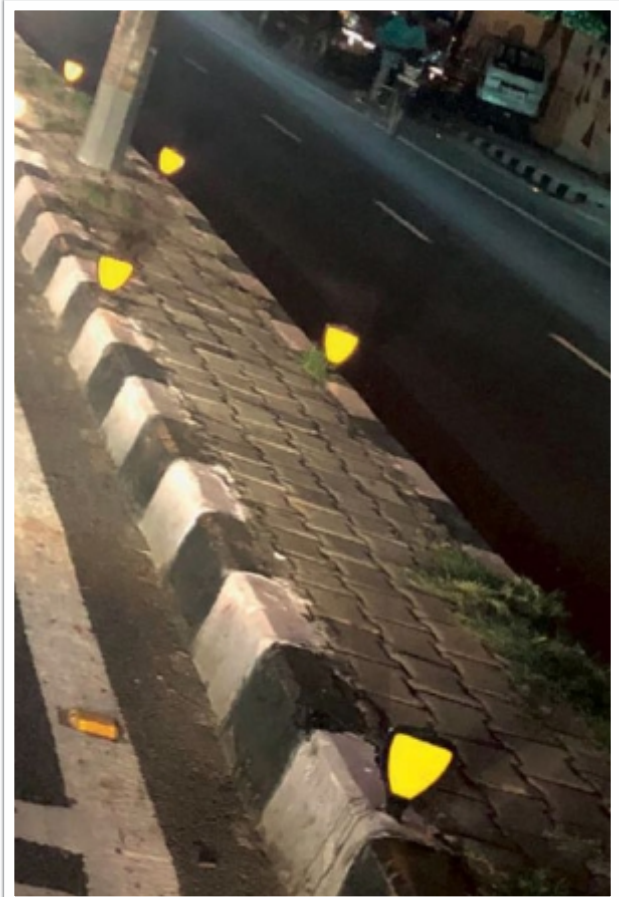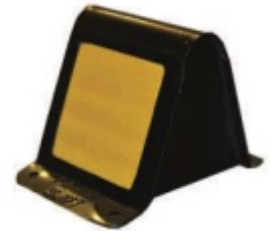

MS Delineators are ideally suitable for dangerous curves, central verges, Island etc. High Quality reflectors and tapes are fixed on post to make it highly visible in night and dark weather condition. They can be installed horizontally as well as vertically. Due to specially designed body and reflectors fixation method, their reflectivity and durability remain for a long life.




Made up of M.S. Holder, duly powder coated in black / white colour. It shall be fitted with two nos.100mm dia and high reflective reflectors (Acrylic) to give excellent reflectivity during night times. MS Holders having Jali & Mesh for reflector protection & for anti theft. Blt Clump Delineator shall be fixed on Bridges or Flyover's Poles.

SKS 953 Clump Delineator



L - 600mm

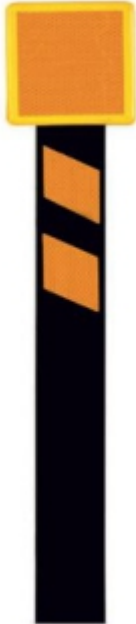

L - 750mm

DUAL-DIRECTIONAL delineator made out of 16 gauge MS RECTANGULAR PIPE of size 25 x 68 mm and of length 600 mm / 750mm Pipe stove enamelled and baked to 1200C OR powder coated. Head made out of ABS plastic rectangular moulded with flat face provided with High Intensity Prismatic Reflectors of colour (white/yellow/red) of size 100 x 125 mm with additional 2 reflective strips of 50 mm wide.



SKS945



SKS 915



SKS 952



SKS 954



SKS 944

PART NO.	SKS 945	SKS 915	SKS 952	SKS 954	SKS 944
Dimensions (Dia x Length)	50 x 750mm	50 x 750mm	50 x 750mm	65 x 750mm	75 x 900mm
No. of Tapes or Reflectors	x3 Radium Tapes	x3 HIP Tapes	x2 Acrylic Reflectors	x2 Acrylic Reflectors	R a d i u m Tapes
Mesh	Available	Available	Available	Available	Available



SKS 943



SKS 951



SKS 946



SKS 949

PART NO	SKS 943	SKS 951	SKS 946	SKS 949
Dimensions (Dia x Length)	50 x 900mm	75 x 1200mm	25 x 50 x 1000mm	30 x 115 x 1200mm
No. of Tapes or Reflectors	x 2 Round & 1 Rectangle Reflectors both sides	x3 HIP Tapes	x2 HIP Tapes with PVC Box	HIP Tapes
Mesh	NA	Available	NA	NA



SKS 1954

PART NO.	S2M 1954
Length	1070mm
Face Width	87mm
Shape	Edge Curves
No. of Tapes	x3 HIP Tapes both Sides



S2M 948

Model No. PS 948: Road Safety Bollards having : - 3mm thick 400 x 400mm square ACP Sheet duly affixed with 9nos. 100mm round acrylic made highly intensity reflectors. Or Aluminium Composite Metal (ACM) (Overall thickness – 3mm, having aluminium foil of thickness 0.2mm on both the side). All the three plates shall be mounted on 65mm dia, 1.2mm powder coated M.S. Pipe in the sequential arrangement (downward). The plates shall be fixed with pipe having anti theft locking arrangement. The overall length of Bollard including grouting portion is 3000mm.

S.S. QUEUE MANAGER WITH BELTS



SKS 2114

OPTIONAL

S.S. QUEUE MANAGER WITH VELVET ROPE



SKS 2114A

PLASTIC QUEUE MANAGER



SKS 1800A

SKS 1800

SKS 1800B





PAIR IMAGE

PART NO.	S2M 1800A	S2M 1800	S2M 1800B	
MATERIAL	STAINLESS STEEL	STAINLESS STEEL	POLYETHYLENE	HDPE
HEIGHT	1000mm	900mm	1000mm or Can Be Adujust	1000mm or can be Adjust
BASE DIA	350mm	350mm	350mm	300mm
WEIGHT	8Kgs	8Kgs	2.8Kgs	Sand filled upto 5Kgs
BARRICADE BELT	Nylon Belts Upto 2.5Mtrs	VELVET ROPES x 1.5Mtr	No Belts Only Chain Connector Available	No Belts Only Chain Connector Available

Made from Virgin Plastic & Synthetic rubber parking blocks and corner guards. **Applications:** • Parking

SKS 824

PU Corner Guard
H-900mm x W 100mm

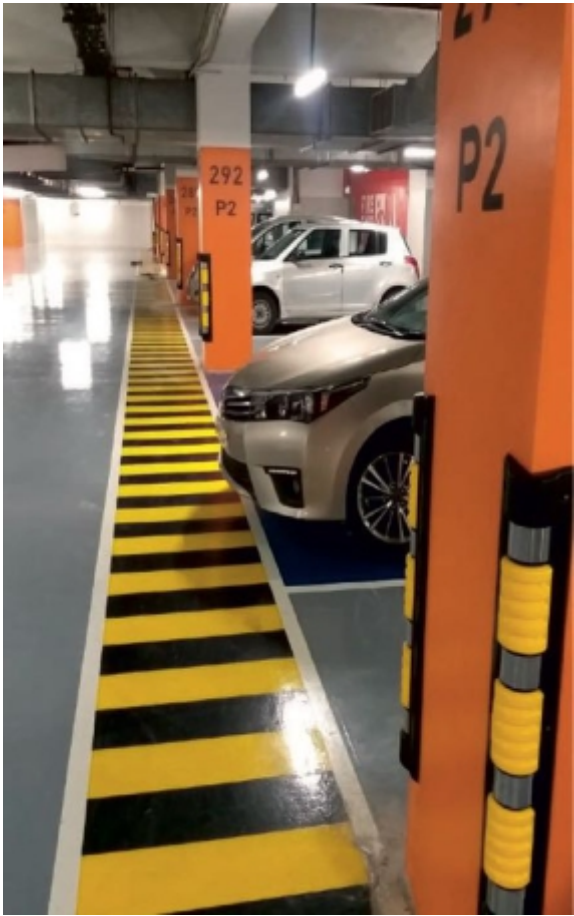

CORNER GUARD / PILLAR GUARD

We can also manufacture any size/design according to customers requirement

Plastic Corner Guard
H-800mm x W 100mm
All Colours Available



Rubber Corner Guard
H-800mm x W 100mm



Rubber Corner Guard
H-1000 mm x W 100mm



Rubber Corner Guard
H-1200mm x W 100mm



Rubber "U" Shape Corner Guard
H-900mm x W 100mm



Rubber "U" Shape Corner Guard
H-1000mm x W 100mm



Rubber "U" Shape Corner Guard
H-1200mm x W 100mm



S2M-L-800 CG 9(P)

S2M-L-800 CG (P)

S2M-L-1000 CG (R)

S2M-L-1200 CG (R)

S2M-L-900 CG (R)

S2M-R-1000 CG (R)

S2M-R-1200 CG (R)


WHEEL CHOCKS



SKS 804
240 x 175 x 160 mm
Weight - 3 Kg



SKS 807
250 x 170 x 182 mm
Weight - 6.5 Kg



SKS 805
375 x 220 x 225 mm
Weight - 11.5 Kg



SKS 804
250 x 170 x 150 mm
Weight - 1.2 Kg



SKS 810
285 x 175 x 200 mm
Weight - 1.8 Kg



SKS 811
470 x 200 x 280 mm
Weight - 4.5 Kg



SKS 803
500 x 160 x 100 mm



SKS 806
500 x 160 x 100 mm

SKS 802
500 x 150 x 100 mm



Wheel Chock with stand



Wheel Chock with Trolley

WHEEL STOPPERS

WHEEL CHOCK

CABLE PROTECTORS



2 CHANNELS



3 CHANNELS



5 CHANNELS



Rubber Lane Divider
1000x150x60 mm



Dock Bumper
450x250x100 mm
Weight - 10 Kg




Dock Bumper D-Type
500x150x150 mm
Weight - 13 Kg




Round Pillar Guard
1000x190x10 mm

OPEN CHANNELS

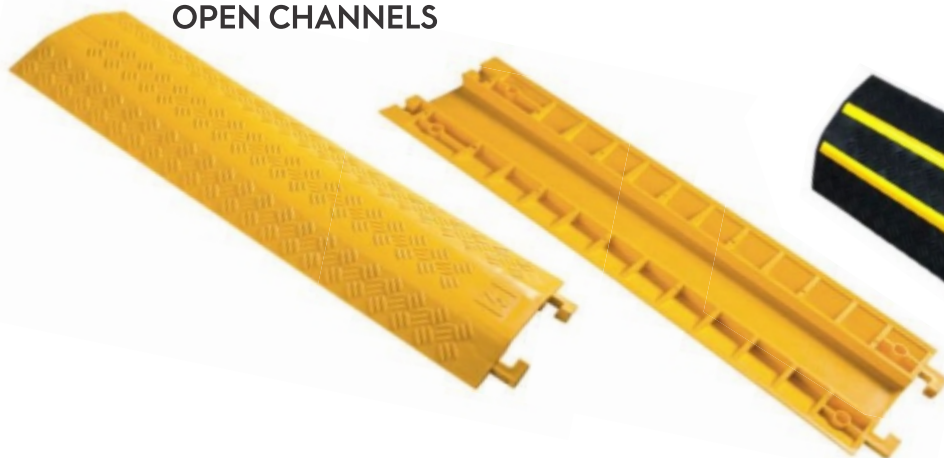

SKS 851

Material: Poly Ethylene
Dimension: 1000x285x35 mm
Slot Size: 110x27 mm

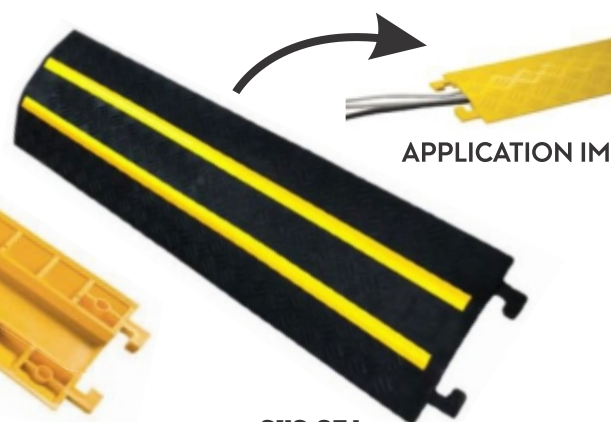

SKS 851

Material: PVC Rubber
Dimension: 1000x285x35 mm
Slot Size: 110x27 mm
Weight: 4 Kg

MISCELLANEOUS PRODUCTS

12. Model No. S2M 4108 Breathe Analyser



SKS4108

13. Model No. S2M 4109 Nose Mask



14. **Model No. SKS 4112 BARRICADING TAPE:** - Made of Polythene strip in two colour lamination, Ultraviolet scratch resistant, width of strip 50mm, 75mm & 100mm and length of roll 100/ 300/500mtr. Printing message shall be accordingly to requirement of purchaser.



15. Canopy All Sizes



**STANDARD SIZE
10 x 10 FEET**



SEARCH MIRRORS

Under Vehicle Bombs Search Trolley Mirror Handle Bar-Stright or telescopic handle bar length 4ft approx
Moment Roller wheels provided for free & easy movement Base Tilt Suitable design for clear view Light
Source (optional) Commando touch Fully Telescopic Extension Search Mirror Approx Telescopic handle
bar Handle extendable up to 4ft approx Light Source can be mounted (optional)



S2M 1204

Mirror Size : 2 ft x 1 ft
Also available
Mirror : size 24" x 18"



S2M 1205

Mirror size : 9"x 5"

CONVEX MIRROR

Made up of Polycarbonate Reflective Mirrors. Body is made of
ABS/Fiber/ Palstic. Suitable for indoor/Outdoor use with hood.
Complete with mounting hardware (with/without pipe).



Dimension- 45cm



Dimension- 60cm



Dimension- 80cm



Dimension- 100cm



PERSONAL PROTECTIVE EQUIPMENTS (PPE)



SKS 601



SKS 602



SKS 603



SKS 604



SKS 605



SKS 610



Loader



NAP



Ratchet



Gum Boot



S2M 201



S2M 202



S2M 203



Shoes



High ankle shoe



Electrical Gloves




Leather Gloves



Rubber Gloves



Dotted Gloves

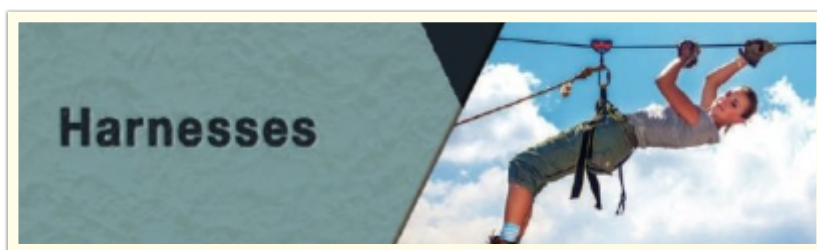

Harnesses




Safety Harness



8 mm Knotted Triple Layer Type Safety Nets
 Herder & Tie Cord Rope - 12mm IS:5175:1992 Inside Rope/ Mesh
 Rope - 6mm -15:5175:1992 Mesh size 100mm x 100mm Square/
 4"x 4" Second Layer - Overlay Containment Net of HOPE UV
 Stabilized Blue Net Third Layer - Monofilament IN Stabilized Net
 Green/Red 120 GSM Fabricating - Passing With Knelled Type De
 Roue & De Caul Tie cords 2 metre long at four corners and 1 metre
 long at every 2 metre Standard Size - 5 x 10 Mir or 3 x 10 MO
 Standard/ Approved - P.P. Rope Certified to IS:5175:1992 & Safety
 Net Made By as Per IS:11057:1984 (OPT

2.5 mm Braided Safety Nets (Single Layer - 25mm)

Bowler & TIE Bore Rope -12mm - IS:5175:1992 Insure Twine Mesr
 Twine - 2.5 mm HOPE Twine Mesr Sae - 25mm i 25mm Square :-
 "atincating - hew treated knotting Tic Rope & Tie Cord - Tie cords 2
 metre long at four corners and 1 metre long at ever; Stanoarc Size -
 5 r 10 Mb Stanoara Approved - P.P. Rope Certified to IS:5175:1992
 & Safety Net Made By EN-1263 (OPTIONS DE CUSTOMIZED
 SIZES ARE ALSO AVAILABLE)



2.5 mm Braided Safety Nets (Double Layer - 25mm Mesh)
 Border & Tie Cord Rope - 12mm -15:5175:1992 Inside Twine/
 Mesh twine - 2.5 non HOPE Twine Mesh Size - 25runi x
 2511m) Square Second Layer Monutilament 00 Stabilized
 Net with Welding / Grinding Splatter Resistant Green/ried 100
 GSM tie Rope & Tie Cord Tie cords 2 metre long al lour
 corners and 1 metre long at even/ 2 metre Standard Size - 5
 x 10 Mir Standard/ Approved P.P. Hope Certified to
 IS:5175:1992 & Safety Net Made By EN-1263 (OPTIONS 01
 CUSIOMIZLO SIZES ARE ALSO AVAILABLE)

14 mm Knotted Triple Layer Type Safety Nets




Border & Tie Cord Rope - 12mm
Inside Rope/ Mesh Rope - 4mm
Mesh size - 100mm x 100mm Square/ 4"x4"
Second Layer - Overlay Containment Net of HOPE UV Stabilized Blue Net
Third Layer - Monofilament UV Stabilized Net Green/Red
100 GSM Fabricating - Diamond type Knotted
Tie Rope & Tie Cord - Tie cords 2 metre long at four corners and 1 metre long at every 2 metre
Standard Size - 5 x 10 Mtr or 3 x 10 Mtr
Standard/ Approved - P.P. Rope Certified to IS:5175:1992 & Safety Net Made By as Per IS:11057:1984 (OPTIONS OF CUSTOMIZED SIZES ARE ALSO AVAILABLE)

Mono Nets Type Safety Nets

Green/Red 120 GSM
Fabricating - Diamond type Knotted
Tie Rope & Tie Cord - Tie cords 2 metre long at four corners and 1 metre long at every 2 metre
Standard Size - 5 x 10 Mtr Or 3 x 10 Mtr
Standard/ Approved - P.P. Rope & Safety Net
(OPTIONS OF CUSTOMIZED SIZES ARE ALSO AVAILABLE)



6mm Knotted Triple Layer Type Safety Nets

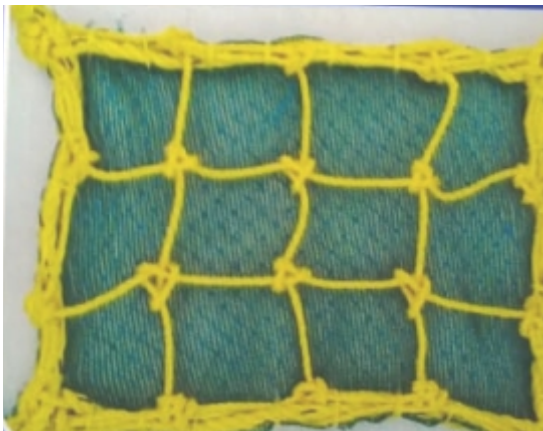

Border & Tie Cord Rope - 12mm
Inside Rope/ Mesh Rope - 6mm
Mesh size - 100mm x 100mm Square/ 4"x4"
Second Layer - Overlay Containment Net of HOPE UV Stabilized Blue Net
Third Layer - Monofilament UV Stabilized Net Green/Red 120 GSM
Fabricating - Diamond type Knotted
Tie Rope & Tie Cord - Tie cords 2 metre long at four corners and 1 metre long at every 2 metre
Standard Size - 5 x 10 Mtr Or 3 x 10 Mtr
Standard/ Approved - RP. Rope & Safety Net (OPTIONS OF CUSTOMIZED SIZES ARE ALSO AVAILABLE)

FIRE EXTINGUISHER



COMMERCIAL DUSTBIN



GLOW & GENERAL SIGNAGES



S.K.SALES

ALL SAFETY ITEM & HELMETS, SAFETY SHOES, NOES MASK , EAR PLUG
SPEED BREAKERS, CAUTION TAPES SAFETY JACKETS CONES, CON SEARCH
LIGHT BATON LIGHT, RAIN COST REFLECTORS, ROAD STUDS ETC.

S.K SALES.F-7/22 SECTOR - 11 PRATAP VIHAR GHAZIABAD 201009

9990077046,9540749589

GSTIN 09EEDPS5359B1ZA

ACCOUNT NO.

S.K.SALES AC - 6151057406

**INDIAN BANK, CROSSING REPUBLIC
GHAZIABAD (U.P.)**

IFSC CODE - IDIB000C178