

DT-450

Datasheet

DEHUMIDIFIER

© 2016 DehuTech AB



Desiccant dehumidifier for drying air at all conditions, but especially suitable at low temperature and low humidity operation.

Complete self-contained unit including desiccant rotor, Erp-2015 compliant fans, reactivation heater and controls. Casing in stainless steel.

The unit is ready for connection to standard size duct work, electrical power supply and external humidity sensor.

SALES
SPARES AND
SERVICE

Sales-Tech Engineers 



Customer Care: +91 92901 33482, +91 90431 81186

E mail: salestechengineers@rediffmail.com

salestechengineers@gmail.com

Technical data

Dimensions

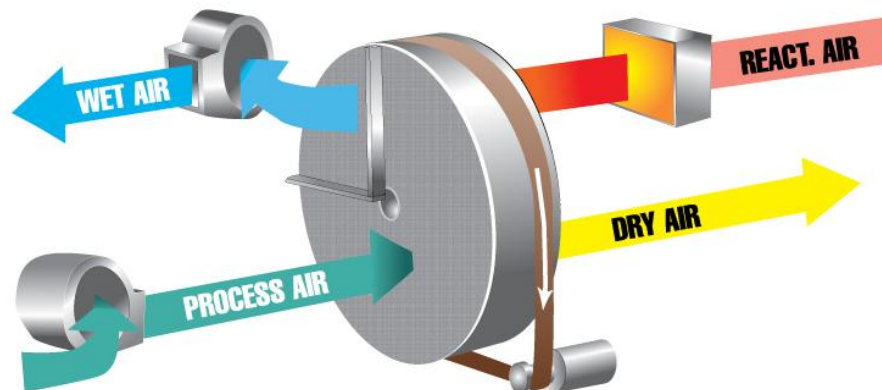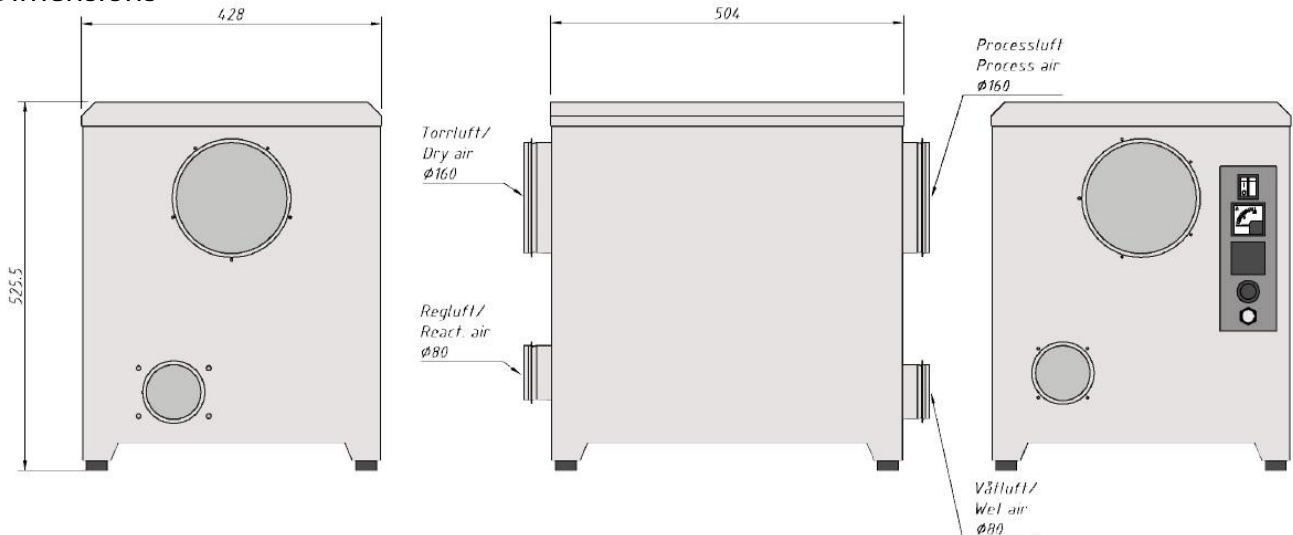

Technical data

Dehumidification capacity	2.2 kg/h	(at +20°C and 60 % RH See performance chart for other data)
Process air flow	450 m ³ /h	(free blowing)
Wet air flow	120 m ³ /h	(free blowing)
Power supply	3.5 kW	(230 V, 50 Hz)
Current (A / phase)	15.2 A	(connection fuse: 16 A / phase)
Weight	31 kg	
Noise level	63 dB(A)	

Note: Valid only for standard units, with standard air-flows.

<p>SALES SPARES AND SERVICE</p>	<p>Sales-Tech Engineers</p> 	<p>Customer Care: +91 92901 33482, +91 90431 81186 E mail: salestechengineers@rediffmail.com salestechengineers@gmail.com</p>
--	--	---