



JYOTI
HYDRAULIC

www.jyotihydraulic.com

12V/24V/48V/60V Automatic Hydraulic Tipper Kit



SPECIFICATIONS

VOLT	CAPACITY	STROKE	TANK CAP.
• 48V/60V	600 Kg	195 mm	300 ml
• 48V/60V	600 Kg	250 mm	300 ml
• 48V/60V	600 Kg	300 mm	1.5 Ltr.
• 48V/60V	1000 Kg	450 mm	1.5 Ltr.
• 48V/60V	1000 Kg	600 mm	4 Ltr.
• 48V/60V	1500 Kg	450 mm	4 Ltr.



***Note : Stroke Length As Per Specification.**

Manual Hydraulic Tipper Kit




SPECIFICATIONS

CAPACITY	STROKE	TANK CAP.
• 600 Kg	195 mm	2 Ltr.
• 600 Kg	250 mm	2 Ltr.
• 600 Kg	315 mm	4 Ltr.
• 1000 Kg	450 mm	4 Ltr.
• 1000 Kg	600 mm	4 Ltr.
• 1500 Kg	450 mm	4 Ltr.

***Note : Stroke Length As Per Specification.**

Scissor Jack For EV Vehicles

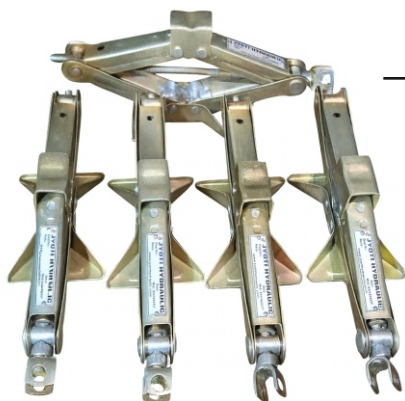

SPECIFICATIONS

- Capacity : 1.2 Ton Max.
- Self Weight : 1.7 Kg
- Close Height : 60 mm
- Open Length : 300 mm



12V/24V/48V/60V DC Hydraulic Power Pack



Bolero & Pickup



COMPACT POWER PACK

SPECIFICATIONS

VOLT	CAPACITY	STROKE	TANK CAP.
• 12V/24V	2500 Kg	400 mm	8 Ltr.
• 12V/24V	3000 Kg	400 mm	8 Ltr.
• 12V/24V	4000 Kg	500 mm	12 Ltr.
• 12V/24V	5000 Kg	550 mm	12 Ltr.
• 12V/24V	7000 Kg	550 mm	12 Ltr.

*Note : Stroke Length As Per Specification.

Industrial Hydraulic Cylinders

SPECIFICATIONS

- Bore Size : 32 mm to 700 mm
- Stroke Length : 5 mm to 7500 mm
- Working Pressure : 5 Bar to 700 Bar




*Note : Stroke Length As Per Specification.

Hydraulic Baling Press Machine

SPECIFICATIONS

- For Carton & Corrugated Boxes
- For Pet Bottles
- For SS Scrap, Iron Scrap, Clothes

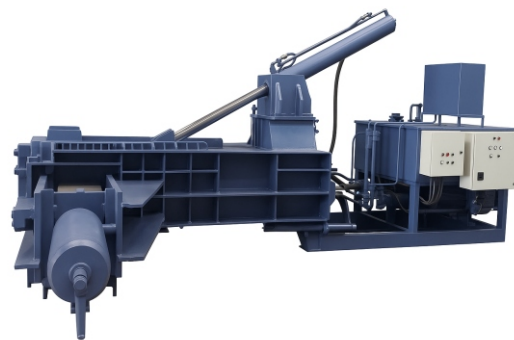

Manual Pumps

SPECIFICATIONS

- Double Piston Pump
- Discharge 18 ml Per Stroke
- Including Gasket, Bolts, Handle





CONTACT US :

Plot No.1&2, Sector-57,
Faridabad (HR) - 121004, INDIA

+91-9541424317
+91-8826533889

info@jyotihydraulic.com
jyotihydraulic@gmail.com

www.jyotihydraulic.com



JYOTI
HYDRAULIC

Worldwide exporter of Hydraulic Products.