







LARGEST EXPORTER

VENUS HOME APPLIANCES (P) LTD., manufacturers of Venus Water Heaters for 60 years is a market leader and pioneer in the Water Heater industry. Venus is one of the leading brands of water heaters in India and stands for Quality, Reliability and Performance, Venus water heaters have sleek exteriors that complement the performance.

With a Presence in more than 30 countries across the World, Venus Home Appliances is the No.1 in Exports with reference to the Water heater Industry.





*Based on customs data

NATIONAL & INTERNATIONAL CERTIFICATION



Winter of the National Averaging Quality Product in 2000 by Gorc of India



Twice writer of the 'Tamil Nado Quality Award'



60 years marter leader and a pronour in this water heater industry



50 900 & 1400 Certification from BVC











Enameling Process- Hi-Tech Plant

Porcelain Enamel Glass lined tanks are produced in a world-class fully automated plant in Venus using the best raw materials and the highest quality assurance practices.



Stage 1 - EORMING

Deep drawing of 1.8-2mm steel blanks to form lids in a heavy duty Hydraulic Press.



Stage 2 - WHILEHOUSE

Welding of lids and shells in an automatic Plasma/MiG Welding Line. All welded tanks are tested immediately at 3 bars pressure: 100% leakage free.



Stage 3 - PRE THEATMENT

Inner surface of the tank is blasted at high pressure in the shot blasting machine to remove any surface impurities and oxides.



Stage 4 - ENAMEL APPLICATION-

Dry Powder Enamel is sprayed on the tanks by 2 robots.

Automatic controls maintain a homogeneous coating thickness
of 250µ across the surface of the tank.



Stage 5 - FIRING

Enamel coated tanks are fired inside the high temperature furnace at 830°C - 850°C. The enamel melts to fuse and bond with the steel to form a protective glass lining.

UNIQUE FEATURES

DURABILITY



Porcelain Enamel Glass Lined Tank



30% larger enode for longer Protection



Full face Gastell with Neck Protection



Zn-Ni coated fasteners 53 Rest Resistance



Double side enameling prevents rusting of flange and door plate

PERFORMANCE



Porcelain Ename! Glass Lined Tank: Menufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.



100% pure cooper tanks For long life and corresion free performance.



Glass Lined incolor Heating Element, Withstands, temperatures up to 3000°C Long lasting even in hard water reduces scala formation. Prevents premature element failure.



Glass Lined Double Geramic Heating Elements: Shock-proof hard Water proof and long-lasting



Hard water protection: Low density, Glasslined elements for long life in hard water areas.



8 bar pressure: Suitable for pressure purces and multi-storey buildings.



Pressure Performance: with stands pressure upto 6.5 bar.



Flexi Mount; Flexible mounting options (Horizontal Model) Wall/Floor mounting. Left/right side opening options available - Ideal for modern apartments.

SAFETY



Multi-function valve: Acts at pressure release valve, non-return valve, drain valve, expansion valve and vacuum release valve.



Sacrificial Magnesium Anode: A special device to enhance the corrosion protection of the tank by means of "Cathodic action".



Triple Safety : Multi-function Safety Valve, Capillary Thermostal & Thermal cultout.



IPX4 Resistant to water spinshes from any direction.

ENERGY SAVINGS



5 Star rating for more energy savings.



3cm Thick Polygrethane Foam (PUF) insulation: Reduces heat loss and keeps water hot for much longer.

DIGITAL



InT Enabled: Mariage your device worldwide through inT-enabled functionality



Wi-Fi Enabled: Set , Schedule & View at your convenience



Smart mode: Energy saying mode with water temperature @ 45°C



Digital Display For visual indication of temperatura



Mobile Application control : One mobile device can control many heaters. Multi-user can control and heater.



Temperature Display: The display will show the real time Semperature.



Vacation Model Safety feature for customers while leaving the house.

ENDURANCE



30 Years* Guaranteen On Copper tank and Porcelain Enamel glass lined tank (Spiash Pro-Smort and Solain Pro In T Medials pnly).



7 Years** Guarantee: On Porcelain Ename! GlassLined Tenk



4 Years*** Guarantoo: On Heaping Element

5-Anti Corrosion Features

Ultimate Durability - Splash pro is designed for durability. With innovative anticorrosion features and hard water protection splash pro is the best among water heaters. Splash pro is built to last for years.



Types of Heating Element

We use different types of heating elements in our water heaters. Which ensures hard water protection and shock protection. They are designed for reliable & energy efficient performance in all types of water conditions. We have higher grade heating elements for hard water areas to resist scale deposits & premature failure. There are 3 types of heating elements: 1. Ceramic Heating element, 2. Glass lined incolor element, 3. Copper Heating element.








Scale Guard Technology



In Ceramic heating element, heat is transferred over a much larger surface area, which reduces the stress on heating element, lowers watts density/sq.cm and ensures less scale deposition on the heating element.

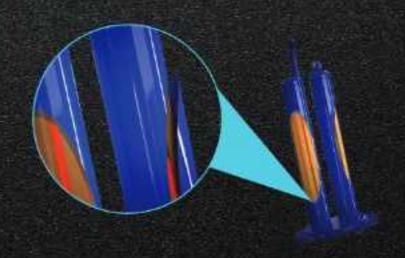

WARMTH FOR LIFE


Venus water heaters are built with state-of-the-art technology and comes equipped with the most innovative features.

- · Storage Water Heaters
- · Instant Water Heaters
- · Tankless Water Heaters
- · Solar and Heat Pump Water Heaters



VENUS TECHNOLOGY

Ultimate Durability and Corrosion Resistance






Scale Guard Technology



3em Thick Polyurethane Foam (PUF) Insulation



Colour-Changing Smart LED's

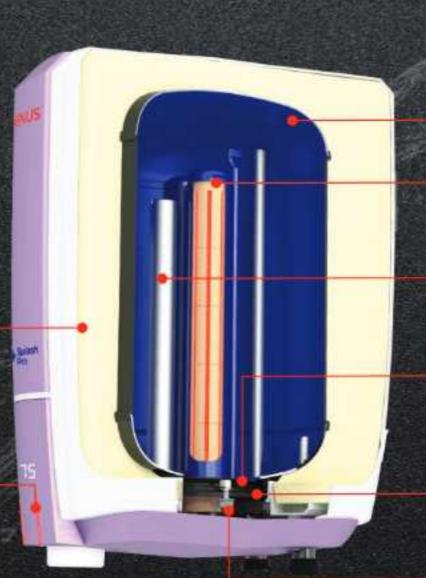



Porcelain Enamel Glass Lined Tank



Glasslined Double Ceramic Heating Elements with Scale Guard Technology



30% larger anode for longer Protection




Double side enameling prevents rusting of flange and door plate



Full face Gasket with Neck Protection



Zn-Ni coated fasteners 5X Rust Resistance

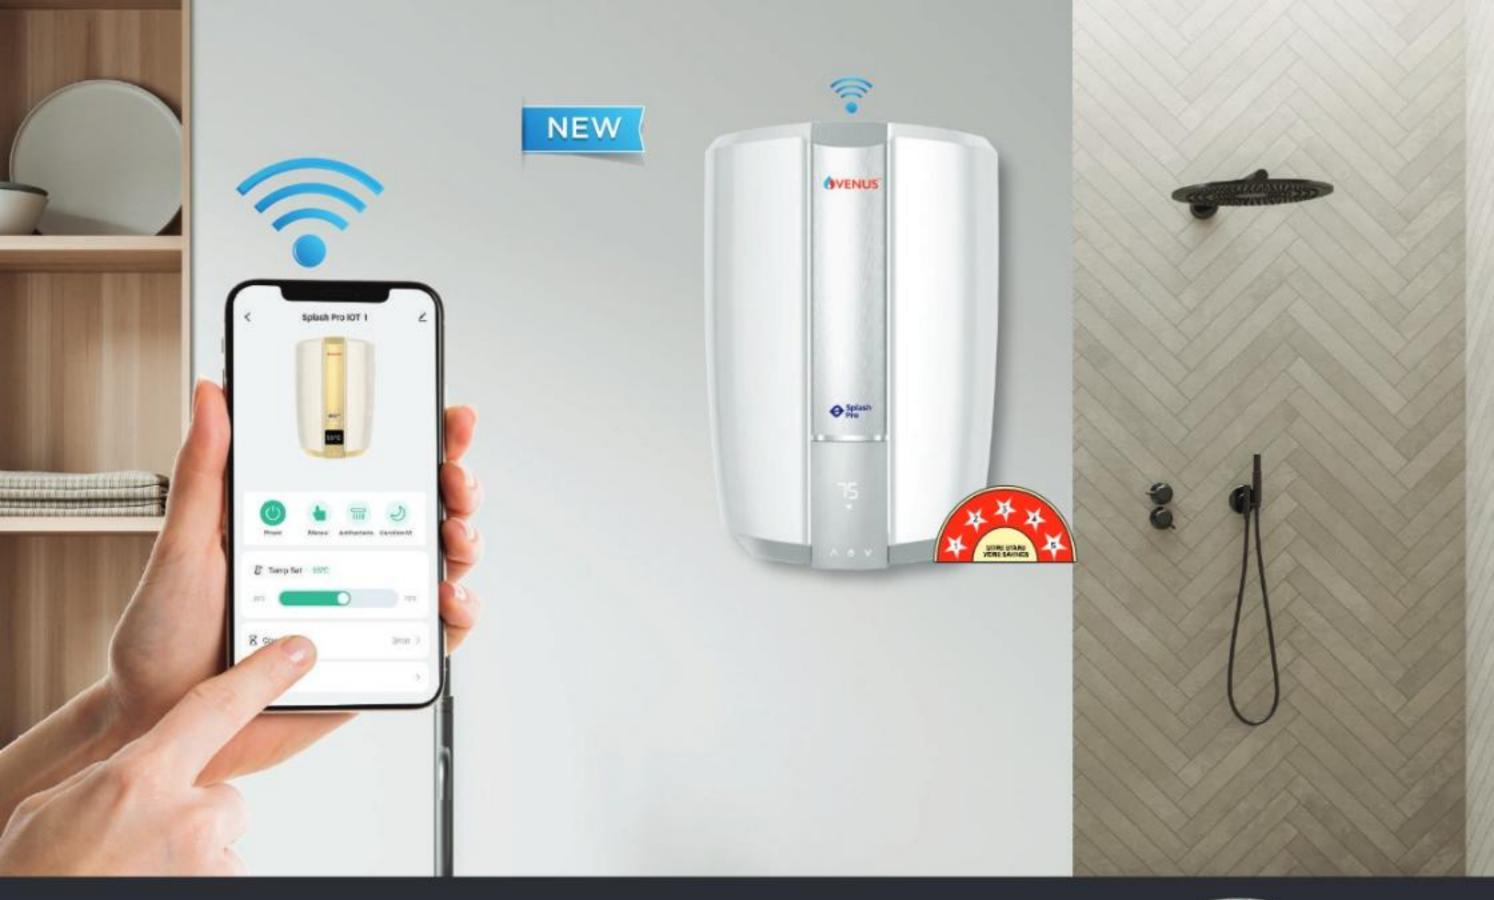





Splash Pro IOT

Embrace the incredible potential of Splash Pro IoT-enabled water heaters to elevate your home's comfort, convenience, and energy efficiency. The smart home revolution has arrived, and with Splash Pro IoT water heater, you can be at the forefront of this exciting transformation. Whether you're seeking convenience, savings, or a greener lifestyle, our Splash IoT water heater your gateway to a future of intelligent, connected living. Embrace the IoT revolution today.



IoT Enabled: Control your Water heater from anywhere in the world



Anti-bacterial Mode: Water heating system that prevents bacterial growth and delivers pure water



Smart Digital Display:

Precise temperature instantly on the Smart LED display



Wi-Fi Enabled; Set , Schedule & View at your convenience



Mobile Application control: One mobile device can control many heaters. Multi-user can control one heater



Smart mode: Energy saving mode with water temperature @ 45°C



App sharing: One Tap to share devices among family members



Timer: A suitable time and day can be set for the Heater to turn on and off.



Vacation Mode: Safety feature for customers while leaving the house.



Hard Water Protection



Anticorrosion Features



Guarantee on inner tank

| Model | Model | Wattage | Capacity | Time to Raise | Dime | (rmm) |
|-------|-------|-----------|--------------------------|---------------|------|-------|
| | | in Litres | Temp by 35°C Vertical | Α | 8 | c |
| 155W | 2000 | 15 | 20mm | 488 | 326 | 375 |
| 255W | 2000 | 25 | 33min | 545 | 386 | 433 |





| GU | ARANTI | EE |
|------------|-----------------|---------|
| Inner Tank | Heating Element | Product |
| 10 Years | 4 Years | 2 Years |











Graphite Silver

Splash Pro Smart

Introducing "Splash Pro Smart" the smart upgrade of splash pro water heater from venus with elegant central panel design and brushed finish with a collection of delighting colors, Splash pro smart has a convenient digital display to exacity know the temperature of the hot water for a comfortable bath.



Glasslined Double Ceramic Heating Elements with Scale Guard Technology



Smart indicator: Digital Display

Colour Changing Smart LED'S

Blue Heating **Red Ready** to use





Porcelain Enamel Glass Lined Tank



30% larger anode for longer Protection



Full face Gasket with **Neck Protection**



Zn-Ni coated fasteners 5X Rust Resistance



Double side enameling prevents rusting of flange and door plate



Porcelain Enamel Glass Lined Tank



3cm Thick Polyurethane Foam (PUF) Insulation



Scale Guard Technology



Hard Water Protection



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout



pressure: Suitable for pressure pumps and multi-storey buildings.


| Model | Wattage | Capacity | Time to Raise | Dimensions (in | | mm) |
|-------|---------|-----------|----------------|----------------|-----|-----|
| | | in Litres | Temp by 35°C - | Α | В | c |
| 06SB | 3000 | 06 | 06mm | 298 | 336 | 340 |
| IOSX. | 2000 | 10 | 13min | 368 | 326 | 375 |
| 155X | 2000 | 15 | 20min | 488 | 326 | 375 |
| 255X | 2000 | 25 | 33min | 545 | 386 | 433 |

Rated Pressure: 8 bars (Big/cm²; max, 80m water head) "Specifications subsect to change without prior notice. *6 Ltr Image is different look, *Copper Heating Dement in 658 Model





| | 103X, 153X & | 258X | 0688 |
|-----------|-----------------|----------|---------|
| GUARANTEE | Inner Tank | 10 Years | 7 Years |
| | Heating Element | 4 Years | 2 Years |
| | Product | 2 Years | 2 Years |

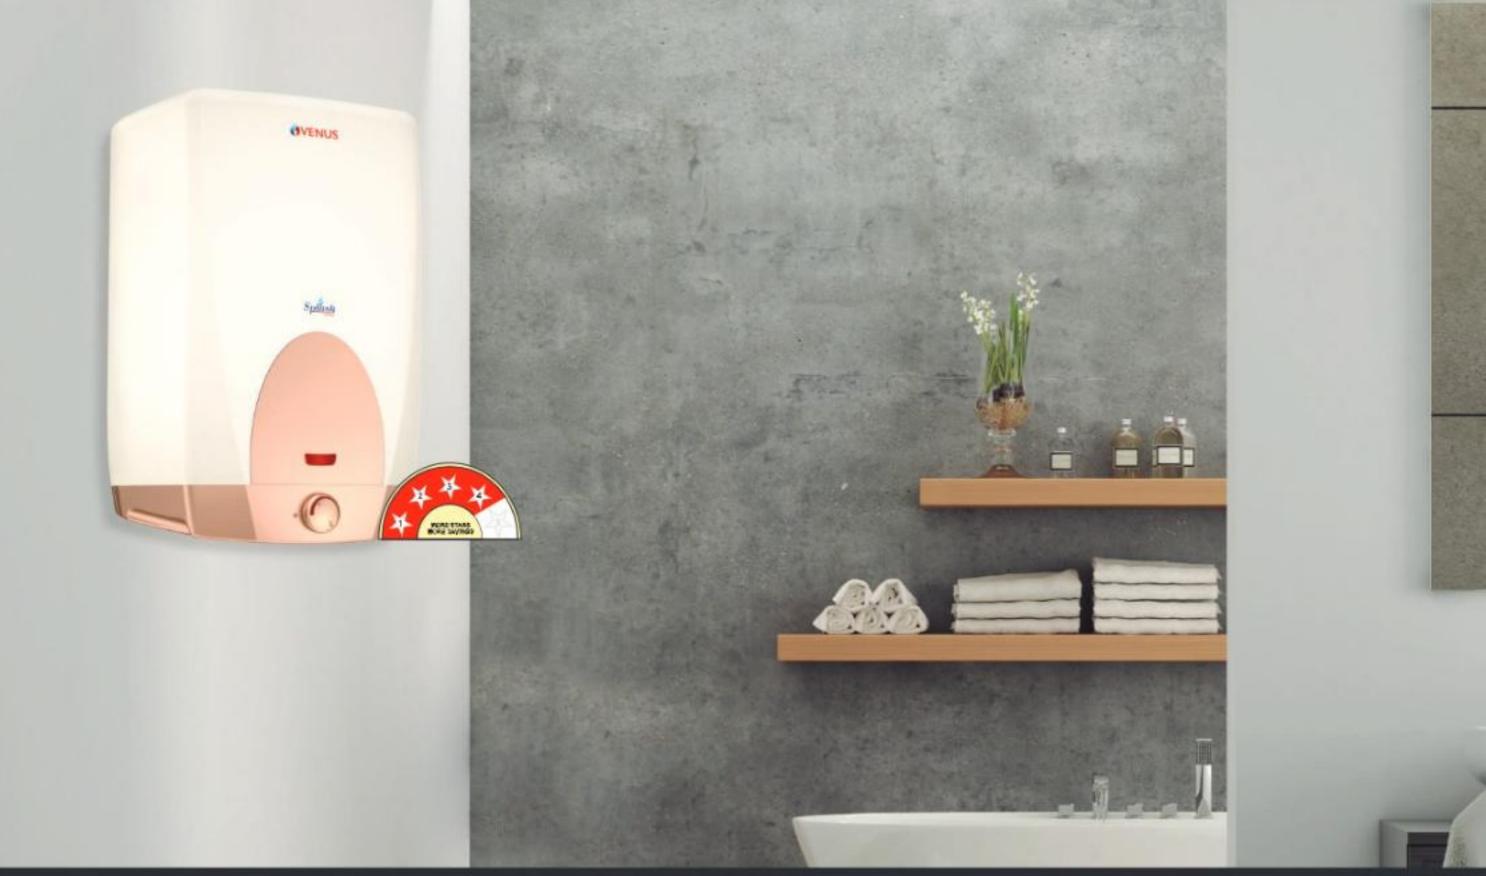



Splash Copper

Splash copper is built to last. Made with sturdy & 100% copper parts - copper tank and heavy gauge copper heating element which guarantees corrosion proof performance for ages. A completely reliable water heater, Splash Copper provides you years of trouble free performance.



Copper Tank + Copper Element



100% pure copper tank: For long life and corrosion free performance. Heavy Gauge, Ribbed for extra strength.



Super Heavy Gauge Copper Heating Element



Hard Water Protection



Thick Polyurethane Foam (PUF) Insulation



Sacrificial Magnesium Anode for Corrosion protection

Product

2 Years



Pressure Performance: with stands pressure upto 6.5 bar;




Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout



Guarantee on inner tank

| Model Wattag | Wattage | Capacity | Time to Raise | Dimensions (in mm) | | |
|--------------|---|-----------|---------------|--------------------|-----|-----|
| | 111111111111111111111111111111111111111 | in Litres | Tomp by 35°C | Α | В | c |
| | | | Vertical | ~ | | - |
| 10CU | 2000 | 10 | 13min | 350 | 316 | 316 |
| 15CU | 2000 | 15 | 20min | 475 | 316 | 325 |
| 25CU | 2000 | 25 | 33min | 520 | 366 | 380 |





"Specifications subject to change without prior notice.







Vectra

Introducing VECTRA, a matchless beauty with one of its kind square design and convenient that matches the elegance of your bathroom interiors. Optimum performance with Porcelain Enamel Glasslined tank, this beauty gives long life and lower energy consumption. This unique model comes with a 3.5cm PUF insulation ensuring better heat retention



Compact Form: Square design - The Unique square design adds a class of elegance for the bathroom interiors



3.5cm Thick Polyurethane Foam (PUF) Insulation



Porcelain Enamel Glass Lined



Glasslined Incoloy Heating Element



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.



Sacrificial Magnesium Anode for Corrosion protection




Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Disc Thermal cutout

| Model | Wattage | Capacity in Litres | Time to Raise Temp by 35°C | Dimensions (in mn | | |
|-------|---------|-----------------------|-------------------------------|-------------------|-----|-----|
| | | | Vertical | Vertical A | В | С |
| 10VS | 2000 | 10 | 13min | 374 | 374 | 288 |
| 15VS | 2000 | 15 | 20min | 410 | 410 | 315 |
| 25VS | 2000 | 25 | 33min | 460 | 460 | 372 |

| 12 | 1 |
|----|---|
| | 1 |
| _ | 4 |

| - | | _ | 7 | <u></u> |
|-----|------------|---|---|---------|
| | | | | |
| | / : | | | В |
| 11/ | 0 | | | |



| GUARANTEE | | | | | |
|------------|-----------------|---------|--|--|--|
| Inner Tank | Heating Element | Product | | | |
| 7 Years | 2 Years | 2 Years | | | |

*Specifications subject to change without prior notice.

Rated Pressure: 8 bars (8kg/cm²; max, 80m water head)











Mystic Rose

Sedra

Introducing Sedra Storage water heaters, built to withstand the test of time and provide you with reliable warmth and comfort. From the robust outer shell to the internal components, every aspect of our water heaters is engineered for longevity. Sedra water heaters are built tough for the long haul and have been constructed to resist corrosion.



Glasslined Double Ceramic Heating Elements Shock-proof, hard water proof, long-lasting (All vertical & except 6SV model).



Colour Changing Smart LED's



Ready to use



Porcelain Enamel Glass Lined Tank



3.5cm Thick Polyurethane Foam (PUF) Insulation



Elegant Design



Temperature Display: The display will show the real time temperature.



Plastic Outer Body: Corrosion free, Shock proof.



Scale Guard Technology



Sacrificial Magnesium Anode for Corrosion protection



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout




8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

Product Specifications*

| Model Wa | Wattage | Capacity | Time to Raise | Dimensions (in mm) | | | |
|----------|---------|-----------|---------------|--------------------|-----|------|-----|
| | waitage | In Litres | Temp by 35°C | A | ВС | D | |
| | | | Vertical | | | | |
| 065V | 3000 | 8 | 6min | 308 | 337 | | 201 |
| 10SV | 2000 | 10 | 13min | 381 | 337 | - | 201 |
| 15SV | 2000 | 15 | 20min | 498 | 337 | | 201 |
| 258V | 2000 | 25 | 33min | 565 | 387 | 1000 | 201 |
| 35SV | 2000 | 35 | 45min | 700 | 387 | - | 201 |

Rated Pressure: 8 bars(kg/cm²; max, 80m water head)



| GUARANTEE | | | | | |
|------------|-----------------|---------|--|--|--|
| Inner Tank | Heating Element | Product | | | |
| 7 Years | 3 Years | 2 Years | | | |

^{* 2} Years Guarantee on Copper Heating Element.

[&]quot;Specifications subject to change without prior notice.

^{*}Copper Heating Element in 6SV Model













Lyra

Introducing the all new Lyra - the ultimate water heater for the new generation. A sleek new design that will suit your modern bathroom interiors and smart indicator with color changing LED rings (Blue for heating and Red for ready to use) gives you the ease and Convenience !!!



Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.

Smart Indicator Colour Changing LED ring







Glass lined Incoloy Heating Element



Thick Polyurethane Foam (PUF) Insulation



Sacrificial Magnesium Anode for Corrosion protection



Hard Water Protection





Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout




8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

| Model | Wattage | Capacity | Control of the contro | Dimensions (in mm) | | | |
|-------|---|-----------|--|--------------------|-----|-----|--|
| | 111111111111111111111111111111111111111 | in Litres | Temp by 35°C | Α | В | С | |
| IOR | 2000 | 10 | 13min | 367 | 325 | 325 | |
| ISR | 2000 | 15 | 20min | 470 | 325 | 325 | |
| 25R | 2000 | 25 | 33min | 530 | 377 | 374 | |







| GU | ARANTI | EE |
|------------|-----------------|---------|
| Inner Tank | Heating Element | Product |
| 7 Years | 3 Years | 2 Years |









Honey Gold

Magma Plus

Magma plus have been built to last and designed to be hard water proof with scale guard technology. An updated and pleasing design with colors in metallic finish lends this model a new grace and charm to blend with your bathroom decor.



Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.



Glasslined Double Ceramic Heating Elements with Scale Guard Technology



Glasslined Incoloy Heating Element (Horizontal Models only)



3cm Thick Polyurethane Foam (PUF) Insulation



Flexi Mount (Only for Horizontal)



Temperature Display: The display will show the real time temperature.



Hard Water Protection



Scale Guard Technology




8 bar pressure: Suitable for pressure pumps and multi-storey buildings.



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout

| Model | W | Capacity | Time to Raise | D | imensio | ns (în me | n) |
|--------|---------|-----------|---------------|------|---------|-----------|-----|
| Photes | Wattage | in Litres | Temp by 35°C | A | В | C | D |
| | | | VERTICAL | | | | |
| 050GV | 2000 | 50 | 64min | 590 | 453 | 200 | 201 |
| 070GV | 3000 | 70 | 60min | 765 | 453 | 367 | 201 |
| 100GV | 3000 | 100 | 85mm | 1005 | 453 | 609 | 201 |
| 140GV | 3000 | 140 | 115min | 1320 | 461 | 867 | 201 |
| 200GV | 3000 | 200 | 165min | 1380 | 510 | 970 | 201 |
| | | | HORIZONTAL | | | | |
| 010GH | 2000 | 10 | 13min | 390 | 313 | 145 | 201 |
| 015GH | 2000 | 15 | 20min | 505 | 313 | 160 | 201 |
| 050GH | 2000 | 50 | 64mm | 890 | 363 | 474 | 201 |
| 070GH | 3000 | 70 | 60min | 765 | 453 | 367 | 201 |
| 100GH | 3000 | 100 | 85min | 1005 | 453 | 609 | 201 |
| 140GH | 3000 | 140 | 115min | 1320 | 461 | 867 | 201 |



GUARANTEE

Inner Tank Heating Element Product 2 Years 2 Years

^{*}Specifications subject to change without prior notice.

^{*}Cupper Heating Element in 10GH models.







Celo Smart

The Stylish designed water heater with a combination of safety, efficiency and technology ensures energy efficient performance. The versatile water heater with the smart Indicator digital display & color changing LED rings makes you ready to enjoy a hot shower !!!



Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.



Heat Retention Technology: No Thermal Bridge between the Tank and the external Housing, thereby enabling 16% lower Thermal Losses.



Digital Display: For visual indication of temperature.



Glasslined Incoloy Heating Element



3cm Thick Polyurethane Foam (PUF) Insulation



Temperature Display : The display will show the real time temperature.



Sacrificial Magnesium Anode for Corrosion protection



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.




Blue for Heating



Red for Ready to use

| Model \ | Wattage | Capacity in Litres | Time to Raise Temp by 35°C | Di | Dimensions | | 9 |
|---------|---------|-----------------------|-------------------------------|-----|------------|------|-----|
| | | | Vertical | А | В | c | D |
| 010CVD | 2000 | 10 | 13min | 385 | 321 | - | 201 |
| DISCVD | 2000 | 15 | 20min | 475 | 321 | 8 | 201 |
| 025CVD | 2000 | 25 | 33min | 530 | 371 | - 32 | 201 |
| 050CVD | 2,000 | 50 | 64min | 875 | 371 | 474 | 201 |





| GUARANTEE | | | | | | |
|------------|-----------------|---------|--|--|--|--|
| Inner Tank | Heating Element | Product | | | | |
| 7 Years | 2 Years | 2 Years | | | | |

*Specifications subject to change without prior notice









Ivory

White

Celo

Celo the most versatile water heaters is energy efficient in performance with a stylish design. Safety, efficiency and technology combined in one water heater.



Porcelain Enamel Glass Lined Tank: Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion.



Heat Retention Technology: No Thermal Bridge between the Tank and the external Housing, thereby enabling 16% lower Thermal Losses.



Glasslined Incoloy Heating Element



3cm Thick Polyurethane Foam (PUF) Insulation



Temperature Display: The display will show the real time temperature.



Sacrificial Magnesium Anode for Corrosion protection




Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

| Model | Wattage | Capacity in Litres | Time to Raise Temp by 35°C | Di | mension | ıs (in me | n) |
|--------------|---------|-----------------------|-------------------------------|------|---------|-----------|-----|
| | | | Vertical | Α | В | С | D |
| 006CV | 3000 | 6 | 6min | 2.95 | 321 | - | 201 |
| 010CV | 2000 | 10 | 13min | 385 | 321 | 0.00 | 20 |
| DISCV | 2000 | 15 | 20min | 475 | 321 | 2. | 20 |
| 025CV | 2000 | 25 | 33mm | 530 | 371 | 18 | 201 |
| 035CV | 2000 | 35 | 45min | 667 | 371 | 1.5 | 20 |
| 050CV 2000 S | 50 | 64min | 875 | 371 | 474 | 20 | |
| | | | Horizontal | | | | |
| 015CH | 2000 | 15 | 20min | 475 | 321 | 160 | 20 |
| 025CH | 2000 | 25 | 33min | 655 | 321 | 317 | 201 |
| 035CH | 2000 | 35 | 45min | 667 | 371 | 474 | 201 |
| 050CH | 2000 | 50 | 64min | 875 | 371 | 474 | 20 |


[&]quot;Specifications subject to change without prior notice.

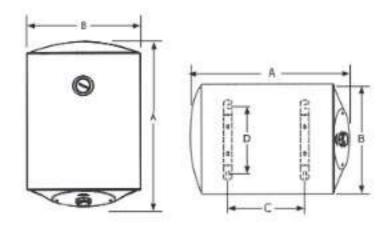



^{*}Copper Heating Element 2 Years Guarantee for 6CV model.

^{*}Horzontal models are also available (10CH, 15CH, 25CH & 50CH) in CHR & CH L

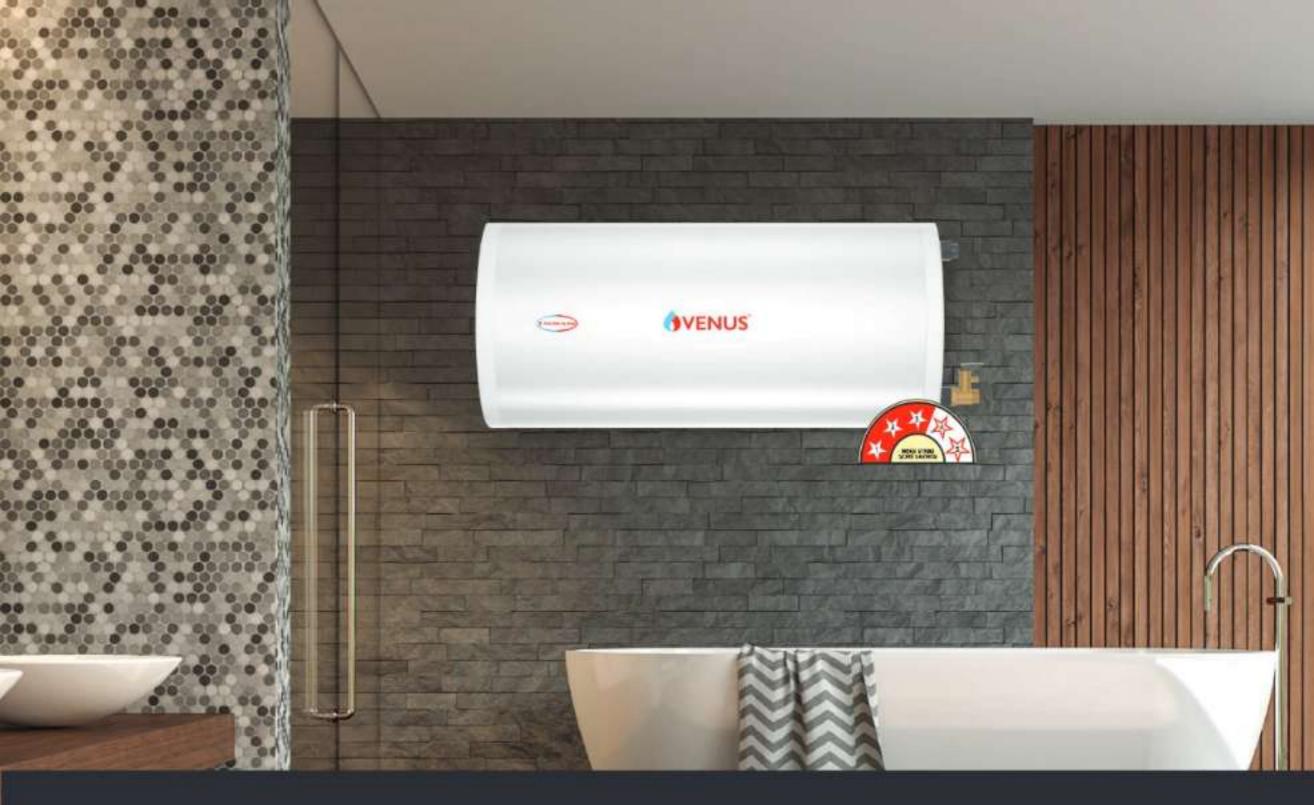


Slim Series



Slim Series

Introducing Slim series water heater. With only 12" Diameter it is ideal for fixing above false ceilings and in bathrooms with low ceilings.



Slim design with 12" diameter: It can be easily concealed inside a false ceiling or fixed in the smallest space.



Rustproof ABS Lids: With Aesthetic Design and Stylish bottom inspection cover.



Porcelain Enamel Glass Lined



Glasslined Incoloy Heating Element



Thick Polyurethane Foam (PUF) Insulation



Copper Heating Element (for 10Hs model only).



Triple Safety: Multi-function Safety Valve along with Capillary Thermostat & Thermal cutout



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.





Sacrificial Magnesium Anode for Corrosion protection

| Model | Wattage | Capacity in Litres | Time to Raise Temp by 35°C | Di | mension | is (in mn | n) |
|-------|---------|-----------------------|-------------------------------|-----|---------|-----------|-----|
| | | | Vertical | А | В | С | D |
| 010HS | 2000 | 10 | 18min | 355 | 305 | 145 | 20 |
| 015HS | 2000 | 15 | 20min | 475 | 305 | 192 | 201 |
| 025HS | 2000 | 25 | 33min | 645 | 305 | 365 | 201 |

^{*}Specifications subject to change without prior notice.

Rated Pressure: 8 bars (8kg/cm²; max, 80m water head)





| GUARANTEE | | | | | |
|------------|-----------------|---------|--|--|--|
| Inner Tank | Heating Element | Product | | | |
| 5 Years | 2 Years | 2 Years | | | |

[&]quot;Copper Heating Element in 10HS Model.



Quik Tankless









Q123 / Q153 / Q183 / Q243

Q90

QU75

QUSS

Quik Tankless

Get hot water in no time with QUIK Tankless water heaters designed with a unique heat exchanger technology for an instant relaxing shower every day this water heater also has an advanced microprocessor control for constant temperature output.



Tankless Heat Exchanger Technology: The heating element and water pipe are molded together for quick transfer of heat from element to the water without contact. This ensures quick heating, long life and safety.



Digital Temperature Display: The set and actual temperature are prominently displayed.



Flow Based Operation



Over heat Protection



Constant temperature output



Earth Leakage Protection



10 bar pressure: Suitable for pressure pumps and multi-storey buildings. (ablicable for QU55 & QU75 models).





Pressure Performance: with stands pressure upto 6 bar. (ablicable for Q90, Q123, Q153, Q183 & Q243 models).





ABS Outer Body : Corrosion free. Shock proof.

| Quilic | | Q10 | QIZI | Q153 | Q183 | Q143 | QU55 | QUITS |
|---------------------------------------|-----------|---------------------|------------------------|---------------|--------------------|---------------------|------------|-----------|
| Warrage | | 9000 VV | 12000 W | 15000 W | 18000 W | 24000 W | 5500 W | 7500 W. |
| Rated Voltage | | 220-240 V, 50Hz, AC | 70000 | 400 V, 50/60F | tr 3Ptase, AC | 10000 | 220-230V,3 | 0/6/Hz.AC |
| Wiring Size | | 3×6mm) | 4×25 mm² | 4x25mm | 4x4mm ^r | 4×6 mm ³ | 3×25 mm2 | 3×4 med |
| Required Rating of Circuit Breaker | | Sit arren | 25 orqui | 25 arept | 32 amps | 60 amps | 32 amps | 40 amps |
| Rated Pressure | | | 0.02 - 0.6 Mgsa 0.020: | | | | @Mpe | |
| Safety Class | | | F25 | | | | | |
| TempSetting range | | 30°C 55°C | 10°C 60°C 30°C 50°C | | 30°C-55°C | | | |
| Rate of flow | | 13-10 L/min | | 1.8-13-L/200 | | | 1.5 - 10 | L/wn |
| Тепрегазите | 5L/min | 26°C | 10000 m | otion - | Language Control | i → 5, | IPC. | 2.5€ |
| Raise (út) @ | 71/min | 18°C | 25°C | 3150 | 37°C | 4FC | 11100 | 18°C |
| | 10.57 min | 13°C | 17°C | 2192 | 26°C | 344 | B*C | THE |
| | 12 L/min | | 14°C | 18.C | 7.1°C | 29°C | 11172 | |
| | .A. | 338 | 111001111 | 365 | | | 170 | 195 |
| Dimensions (mm) | 2 | 241 | | 264 | È | | 220 | 225 |
| | .0. | 72 | | 90 | | | 55 | 80 |



















Sunshine Gold

Brizo Plus / Brizo

Brizo Plus / Brizo offers an effective, space-efficient, and user-friendly answer to hot water requirements. Utilizing precise temperature management and continuous supply, Brizo Plus stands as a fitting selection for modern homes, apartments, and businesses. With Brizo Plus, users can experience instant hot water, concurrently curbing energy wastage and elevating convenience



Porcelain Enamel Glass Lined Tank:

Manufactured in a modern, automated plant using European Technology. Protects the tank from rust and corrosion. Brizo Plus with LED Indicator



Brizo with Neon Lamps





Copper Heating Element



Capsule Polyurethane Foam (PUF) insulation



ABS Plastic Outer Body ; Corrosion free, Shock proof.



Sacrificial Magnesium Anode for Corrosion protection



Multi-function valve



Thermal Cutout




Guarantee on inner tank (3B30 Models Only)



8 bar pressure: Suitable for pressure pumps and multi-storey buildings.

| Model | Wattage Capacity in Litres | | Temp rise at 3L/Min | Dimen | sions (in | mm) |
|-------|----------------------------|---|------------------------|-------|-----------|-----|
| | | | Vertical | Α | В | С |
| 3B30 | 3000 | 3 | 15°C | 380 | 220 | 226 |
| 3B45 | 4500 | 3 | 21°C | 380 | 220 | 226 |
| 3BB30 | 3000 | 3 | 15°C | 380 | 220 | 226 |
| 3BB45 | 4500 | 3 | 21°C | 380 | 220 | 226 |





| Brizo Plu | 8 | Brizo |
|-----------------|-------------------------------|-------------------------|
| Inner Tank | 7 Years | 5 Years |
| Heating Element | 3 Years | 2 Years |
| Product | 2 Years | 2 Years |
| | Inner Tank Heating Element | Heating Element 3 Years |









Ivory

Lava

Need hot water at the flick of a switch!!! Get hot water in an instant!!! The indicator lamps (green for heating and red for power) makes it convenient for use.



100% pure copper tank: For long life and corrosion free performance. Has single, high quality weld joints.



Thermal Cutout: Backup safety device cuts off power at 100°C. Prevents overheating.



Copper Heating Element



Capsule Polyurethane Foam (PUF) insulation



ABS Outer Body : Corrosion free. Shock proof.



Red - Power, Green - Heating




Multi-function valve



Pressure Performance: with stands pressure upto 6.5 bar.

| Model | odel Wattage Capacity | Wastage Capacity Temp to Raise Dimensions (in mr | | | | | n) |
|--------|-----------------------|--|-----------|-----|-----|-----|----|
| Pindel | vvattage | in Litres | at 3L/Min | Α | В | С | D |
| 3L30 | 3000 | 3 | 17°C | 353 | 248 | 188 | 87 |
| 3L45 | 4500 | 3 | 24°C | 353 | 248 | 188 | 87 |

| 1000001100001010 | san la ille antimaten |
|----------------------------|------------------------------|
| *Specifications subject to | change without prior notice. |



| GU | ARANTI | EE |
|------------|-----------------|---------|
| Inner Tank | Heating Element | Product |
| 10 Years | 2 Years | 2 Years |



Quanta





Quanta

The Quanta Instant Water Heater combines cutting-edge technology with user-centric design to provide an exceptional hot water solution. Whether you're upgrading your home or outfitting a new space, Quanta ensures that comfort, efficiency, and style are never compromised. Elevate your daily routine with the Quanta Instant Water Heater – where innovation meets Performance.



High Precision Capillary Thermostat: High precision capillary thermostat which cuts off the power as soon as it reaches the set temperature.



Colour Changing LED : Green for Heating & Red for Ready to use



SS 304 Inner Tank: Stainless Steel for corrosion free performance.



Copper Heating Element: High quality copper heating element for long life and performance.



Engineering Plastic Outer Body : Corrosion free, Shock proof.



Stem Thermal Cutout: Backup safety device cuts off power to Prevents overheating.



Pressure Release Valve: Prevents build up of excessive pressure inside tank.




Pressure Performance: with stands pressure upto 6.5 bar.

Product Specifications

| Model | Capacity | Wattage | Temp rise at | Dimensions in mm | | |
|--------|----------|----------|--------------|------------------|-----|-----|
| Piodel | in Ltrs | TTALLAGE | 3L/Min | A | В | С |
| 3Q30 | 3 | 3000 | 17 °C | 369 | 204 | 184 |
| 3Q45 | 3 | 4500 | 21 °C | 369 | 204 | 184 |

*Specifications subject to change without prior notice



| GU | ARANTI | EE |
|------------|-----------------|---------|
| Inner Tank | Heating Element | Product |
| 5 Years | 2 Years | 2 Years |









lvory

Jiffy

Introducing Jiffy, the best water heater. This stylish instant beauty is most suited for the modern and stylish interiors.



Hi-grade SS 304 Inner Tank: Stainless Steel for corrosion free performance.



Stem Thermostat: Senses water temperature quickly and precisely protect against over heating safety function.



Copper Heating Element



Indicator Lamps : Two LED's - Green for Heating & Red for Power



Plastic Outer Body : Corrosion free. Shock proof.



Stem Thermal Cutout



Pressure Release Valve: Prevents build up of excessive pressure inside tank.



Pressure Performance: with stands pressure upto 6.5 bar.

Product Specifications

| Model | Capacity | 14/ | Temp rise at | Dimensions in mm | | | |
|--------|----------|---------|--------------|------------------|-----|-----|--|
| riodei | in Ltrs | Wattage | 3L/Min | Α | В | С | |
| J45 | 1 | 4500 | 21 °C | 280 | 189 | 158 | |
| 3J30 | 3 | 3000 | 17 °C | 320 | 207 | 176 | |
| 3J45 | 3 | 4500 | 24 °C | 320 | 207 | 176 | |

Rated Pressure: 6 bars (6 kg/cm²; max, 60 m water head)

A



GUARANTEE

Inner Tank
5 Years
Heating Element
2 Years
Product
2 Years

Specifications subject to change without prior notice



Domestic Heat Pump

Venus introduces Heat Pump Water Heaters in India. Using renewable energy heat sources from the ambient air to heat water, these heaters can provide hot water round-the-clock and throughout the year in an energy-efficient and affordable way. Venus Heat Pump Water Heaters are the right solution for domestic hot water applications. Get non-stop hot water anywhere in the house while saving as much as 75-80% on your heating costs. A solitary heat pump installed anywhere in the house can supply hot water to all the bathrooms and kitchens.

PRODUCT SPECIFICATIONS

| Des | cription | | VDI | 4X3i | VDH | X51 | VD | нхві |
|----------------------|------------------------|---------------|---|----------|----------|-----------|-----------|---------|
| es voi e e e e | and the contraction | kW | 3 | .5 | 5.0 |) | 7 | ,5 |
| Rated Hea | ting capacity | BTU/h | 111 | 940 | 170 | 60 | 25 | 590 |
| SA.760 | Inlet Water Temp. 15°C | | . 7 | 5 | - 11 | 0 | 16 | i0 |
| Rated Hot Water | Inlet Water Temp 20°C | L/h | . 8 | 5 | 12 | 5 | 18 | 15 |
| Output | Inlet Water Temp 25°C | Lin) | 10 | 00 | 14 | 5 | 21 | 5 |
| | Inlet Water Temp.30°C | | 12 | 20 | 17 | 2 | 26 | 0 |
| Rated Hea | ting power input | kW | 0. | B3 | 1.5 | 9 | 1 | 79 |
| Operating Current | | A | 3 | .8 | 5. | 4 | | 3.2 |
| Power supply V/PH/Hz | | | | 220~240\ | //1PH/5 | 60~60Hz | | |
| COP | 5057 | W/W | | | | | | |
| Rated outp | out water temperature | °C | | | 5 | 5 | | |
| Max outlet | water temp | °C | | | 6 | 0 | | |
| Compresso | or type | | | | Rota | y×1 | | |
| Water side | heat exchanger | Type | | | Tub | e - Tube | | |
| Dimension | (AxBxC) | mm | 930 x 3 | 80 x 660 | 930 x 36 | 0 x 550 | 930 x 36 | 0 x 560 |
| Noise leve | E. | dB(A) | ≤43 | dB(A) | ≤48dE | 3(A) | ≤52d | B(A) |
| Fan discha | rging | Type | | | Horiz | contal | 44 | |
| Ambient to | mperature | ,C | (-)7-43 | | | | | |
| Refrigerant | t | Туре | R410A | | | | | |
| Water conf | nection | | 3/4" | | | | | |
| Cabinet | | | | - 9 | Povid | er Costed | Vi. | |
| | | Liter | 100 | -300 | 50 | 00 | d | 000 |
| Suggested | water tank | Inner Tank | Porcelain Enamel Glass Lined Tank Epoxy | | | Ероху со | ated / SS | |
| Net weight | | kg | - 4 | 0 | 4 | S | | 54 |
| Gross weig | pht | kg | 4 | 5 | 5 |) | 1 | 60 |
| Guarantee | (Heat Pump) | | - | | 2 ys | ars | | |
| Guarantee | (Tank) | | | 5 ye | ears | | 15 | rear. |
| | the and the | | D | E | D | E | D | E |
| | | 100 Lts | 510 | 1000 | - * | + | - | - |
| Tank dime | riolom | 200 Lts | 560 | 1385 | + | 27 | 6. | |
| sank uirnes | SSIGN | 300 Lts | 650 | 1520 | - | + | - | 10. |
| | | 500 Lts | + | - | 710 | 2000 | 4000 | **** |
| | | 1000 Lts | - | | - | + : | 1050 | 2000 |

Testing condition - Heating: Ambient temp, (DB/WB); 20°C/15°C, water temp; (input/output): 15°C/55°C.

FEATURES






















^{*} Conditions apply.

Go Green With **6**VENUS

Environmental Friendly Initiatives

Venus Water heaters and innovation goes hand in hand. To add the feather in the crown venus has taken certain initiatives which are environment friendly. A Major move to move away from Thermocol packaging has been in process for quite a few years and the alternate solutions have been innovative on that front. The use of molded pulp buffers in domestic and export water heaters and Ceiling Fans, corrugated buffer (made of kraft paper) replacing instapack buffer. Column airbags (which is bio-degradable and at the same time recyclable) for Instant Water heaters and 6 Ltr Storage Models Our Water heaters have CFC/HCFC Free Insulation that has low global warming potential and Zero Ozone depletion potential. This ensures no damage to the ozone layer and minimum impact on global warming.



Low Global Warming

Environmental friendly PUF insulation material which are highly efficient and have impressively low GWP (Global warming potential) compared to traditional insulation materials thereby actively contributing to reduced greenhouse gas emissions & mitigating climate change



Ozone Friendly Insulation

Using polyol and isocyante in the production of polyurethane foam (PUF). Our PUF has zero ozone depletion potential (ODP), which ensures it does not harm the ozone layer














New Generation Packaging

In our efforts to contribute positively to the environment, we have completely revamped our packaging solutions. We've transitioned away from conventional materials such as Thermocole (EPS) and have instead adopted a new range of eco-friendly alternatives. Our innovative packaging choices now include Moulded Pulp Buffer, InstaPack Buffer, Corrugated Buffer, and Column Airbag.










Model Selection Guide

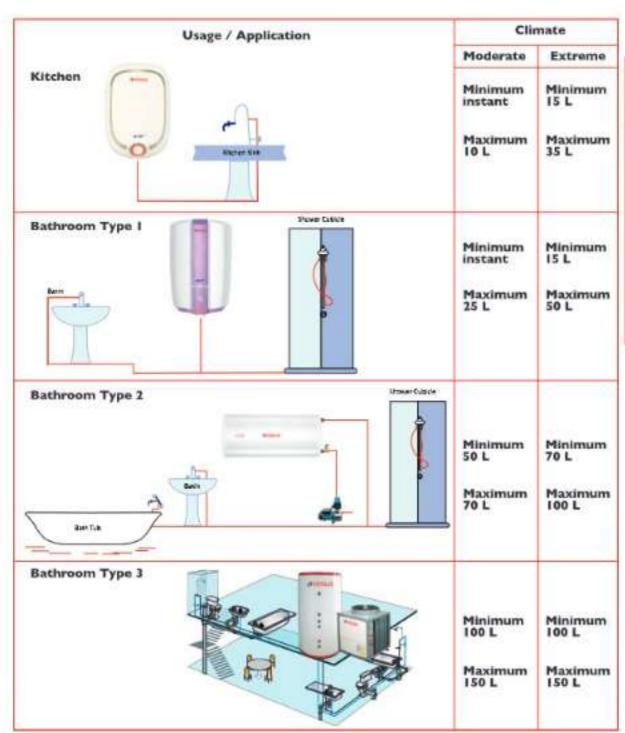

| Volume of mixed water at 40°C with cold water | | | | |
|--|-------|-------|--|--|
| Capacity | 15°C | 25°C | | |
| 10 L | 20 L | 27 L | | |
| 15 L | 30 L | 41 L | | |
| 25 L | 50 L | 67 L | | |
| 35 L | 70 L | 95 L | | |
| 70 L | 140 L | 189 L | | |
| 80 L | 160 L | 216 L | | |
| 100 L | 200 L | 270 L | | |
| 150 L | 300 L | 405 L | | |

A Service that's full of warmth

Venus designs its products to meet demanding national and international standards. You can be sure that this drive for quality is matched by the customer satisfaction record that our after sales service strives for. "Service within 24 hours" is the promise of our committed service personnel. With more than 310+ service centers throughout the country, prompt, economical and reliable service will reach you, wherever you are.







spare parts

0 08144666999

+91-9884064999

Note:

1. Assuming usage is by 1-2 persons. For more number of people, option for the next higher size.



VENUS HOME APPLIANCES (P) LTD.

CENTRAL MARKETING OFFICE: 4/993, Kamaraj Street, Rajiv Gandhi Salai (OMR), Kottivakkam, Perungudi Post, Chennai - 600 096.

