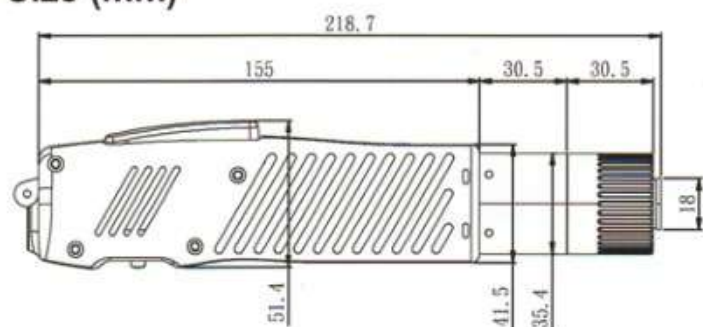
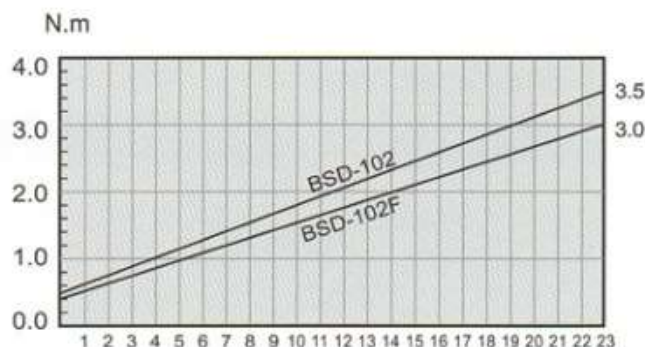


BSD**SERIES ELECTRIC SCREWDRIVERS****MEDIUM TORQUE COMPACT DC SEMI-AUTOMATIC
TRIGGER START CLUTCH TYPE SERIES****BSD-102**

- Widely used for screw tightening.
- Economical solution for general assembly.
- High speed model available.
- Carrying case available upon request.
- CE available upon request.

**Size (mm)****Specifications**

Model		BSD-102	BSD-102F
Input Voltage		36V DC	36V DC
Torque	(kgf.cm)	4.08-35.71	5.10-30.60
	(Lbf.in)	3.54-30.98	4.43-26.55
	(N.m)	0.4-3.5	0.50-3.0
Repeatable Torque Accuracy(%)		±5%	
Torque Adjustment		Stepless	
Unloaded Rotation Speed (r.p.m.)		1000	2000
Screw Size Dia(mm)	Machine Screw	2.6~5.0	
	Tapping Screw	2.6~4.0	
Power Consumption		45W	
Weight(g)		510	
Length(mm)		230	
RoHS		✓	
Power Controller		BSD-36P-60W	BSD-36P-60WF
Bit Type			

Torque Range Chart**Specifications**

Model	BSD-36P-60W	BSD-36P-60WF
Input Voltage	AC 220V 50/60HZ	
Output Voltage	36V DC	
Size	155*60*35mm	
Weight	260g	
Suitable Model	BSD-102	BSD-102F
Remark		
Plug Type		