

ION GUN

ZM-G1G



제품사양 / Product Specifications


Category		Specifications
입력 전압 (Input voltage)		DC 24V± 10%
입력 전류 (Input current)		200mA
방전 전압 (Emitter voltage)		±4.0kV
소모 전력 (Power consumption)		MAX. 5W
출력 주파수 (Output frequency)		50kHz
이온 발생 방식 (Ion generating method)		Corona discharge
전압 인가 방식 (Voltage application method)		High-FrequencyAC
재 질 (Material)		Body : ABS / Emitter Pins : Titanium
방전핀 교체 (Emitter replacement)		Replaceable
이온 밸런스 (Ion balance)		Under Average ±15V
공급 에어 (Air)	종 류 (Type)	CDA(Clean Dry Air), N2
	압 력 (Pressure)	0~0.5Mpa
	유 량 (Flow) / Per 1 emitter	128L/㎥ [0.3Mpa]
	공급튜브 직경 (Air tube diameter)	6pi (Outside)
오존 발생량 (Ozone generation)		Under 0.05ppm
사용 온도 (Ambient temperature)		0℃ ~ +50℃ (32~122℉)
사용 습도 (Ambient humidity)		35~85%RH (No condensation)

※ 제품의 사양은 성능 개선을 위하여 별도의 통보 없이 변경될 수 있습니다.
Specification is subject to change without notice for the improvement of product performance

제품장점 / Advantages




알람 출력 기능
High voltage alarm output



간편한 청소 및 유지관리
Easy cleaning and maintenance

제품성능 / Product Performances

Relation between Supply air pressure and Decay Time

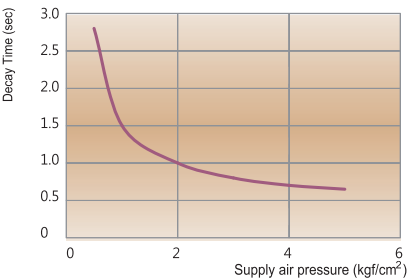

Air purge: 0.3Mpa, Capacity : 20pF, Distance : 150mm
Charged plate dimensions : 150mm x 150mm, Measurement condition : 1kV→0.1kV
※ 상기 성능그래프는 당사 실험실 기준입니다.
(This graph is based on our laboratory environment testing.)
(Unit : mm)

제품외관도 / Dimensions

Main Unit

