



CM PUMPS AND SYSTEMS PVT. LTD.

Sealless Magnetic Drive Chemical Process Pumps



CERTIFIED

EN ISO 9001
CERTIFICATE NO. 20100163001473
TÜV AUSTRIA CERT GMBH



ATEX 2014/34/EU



About Us

We are the Pioneer and the first Indian Manufacturer and Exporter of Sealless Magnetic Drive Centrifugal pumps used for the Industrial Segments – Chemical Process Industries, Pharmaceutical industries, Petrochemical Industries, Refineries, Water treatment plant, Metal processing industries, Recycling industries, Refrigeration industries, Heating plant and Tank storage. We offer a wide range in Magnetic Drive Centrifugal Pumps according to DIN EN 22858/ISO 2858 Standards.

Our Sales and Service support team is always prompt to serve you better and provide professional and seamless service. CM Pumps and Systems Pvt Ltd has engaged the services of leading Management Consultant to train and develop all CM Pumps personnel to serve their customers professionally and efficiently



Our Mission and Moto

The mission and moto is to successfully develop and produce superior quality and energy efficient pump sets at right price for global market.

Our Vision

Our Vision is to be the environment friendly, global manufacturer and supplier of high efficiency and excellent quality multi application Magnetic Drive centrifugal pumps sets throughout the world.

Our Team

The reason behind our enviable leadership in global market is the result of sustained work comes from our competent professionals. They are not only highly qualified but also are consistently working towards improvising on our innovative range of pumps as per prevailing quality standards. Our professionals make full use of available facilities to cater to ever increasing demands of various Industries.

Our team comprise:

- Engineers
- Technicians
- Quality Controllers
- Research Associates



Our professionals keep themselves abreast with latest technology and work in sync with each other to cater to specific demands of our clients. Their continuous support and assistance have enabled us to come up with new products for our client.

Why us?



- Professionalised, Well Managed Pvt. Ltd. Co.
- State-of-the-art infrastructure
- Superior Quality With Affordable Prices.
- Shortest Delivery Period, With Proven Quality Products.
- Willingness To Offer Required Technical Support.
- Prompt After Sales Services.
- Client-centric approach
- Experienced professionals
- Effective quality controls measures
- Research Associates



Certifications

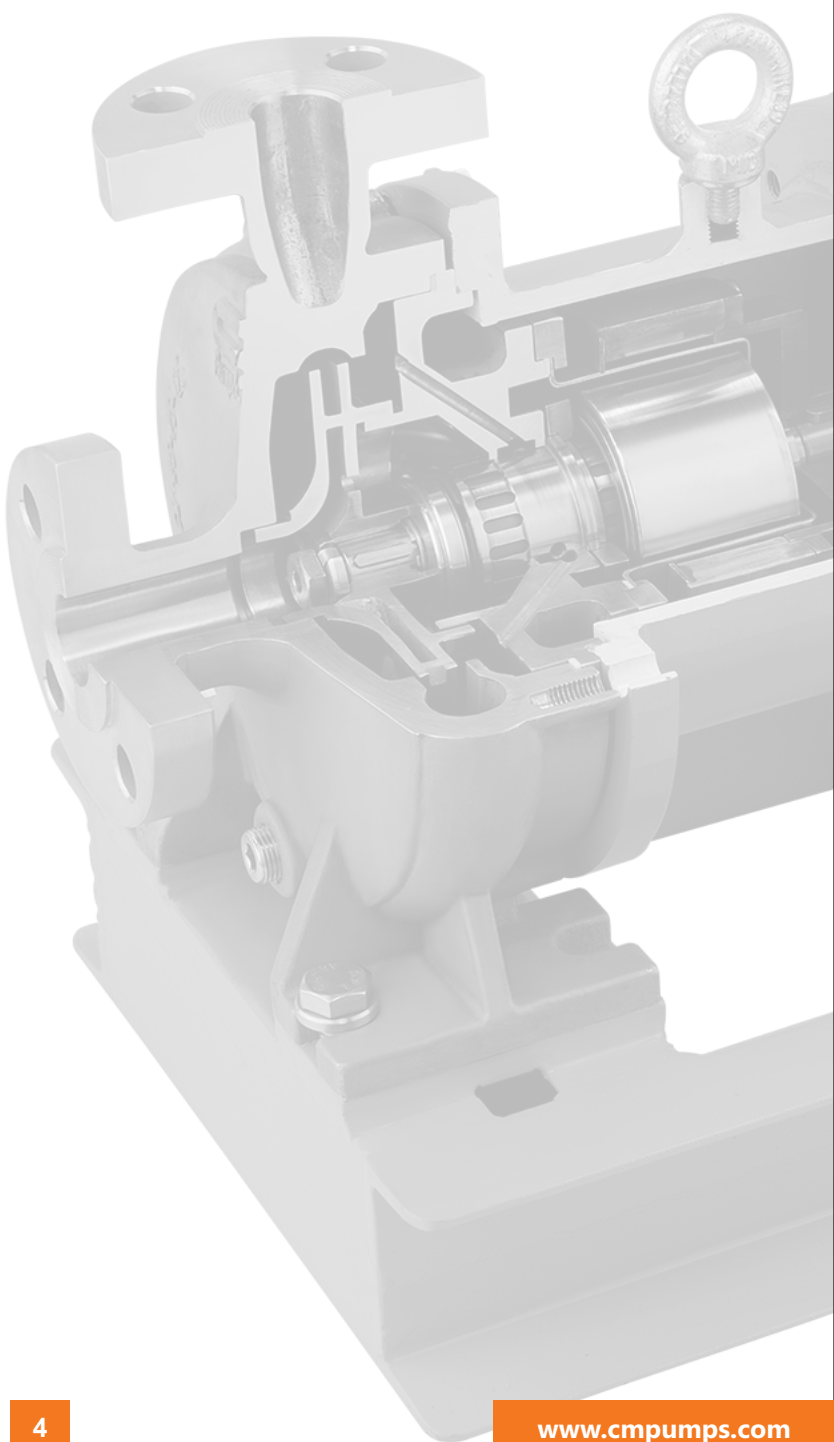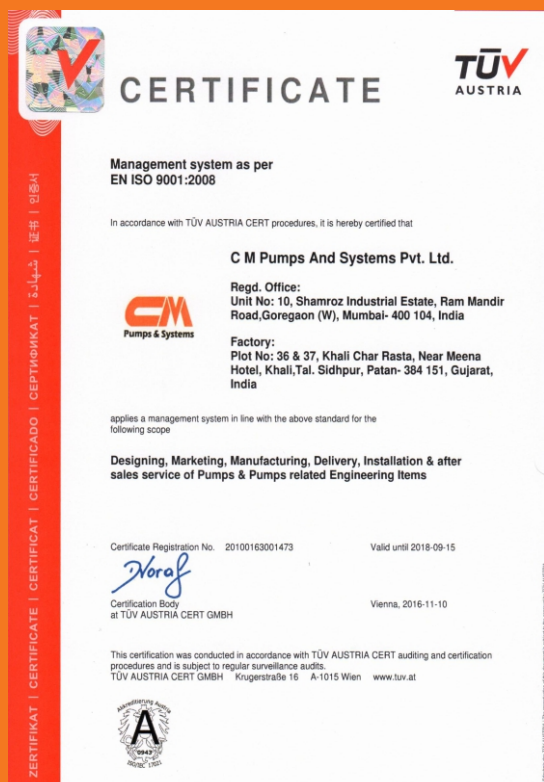


CZ Series – SS Magnetic Drive Chemical Process Pump (Close Coupled)

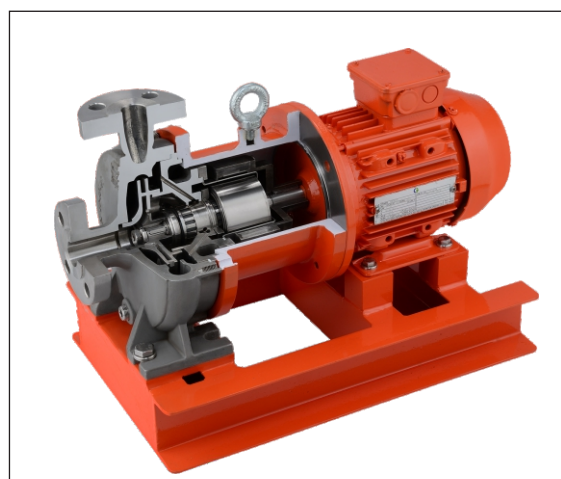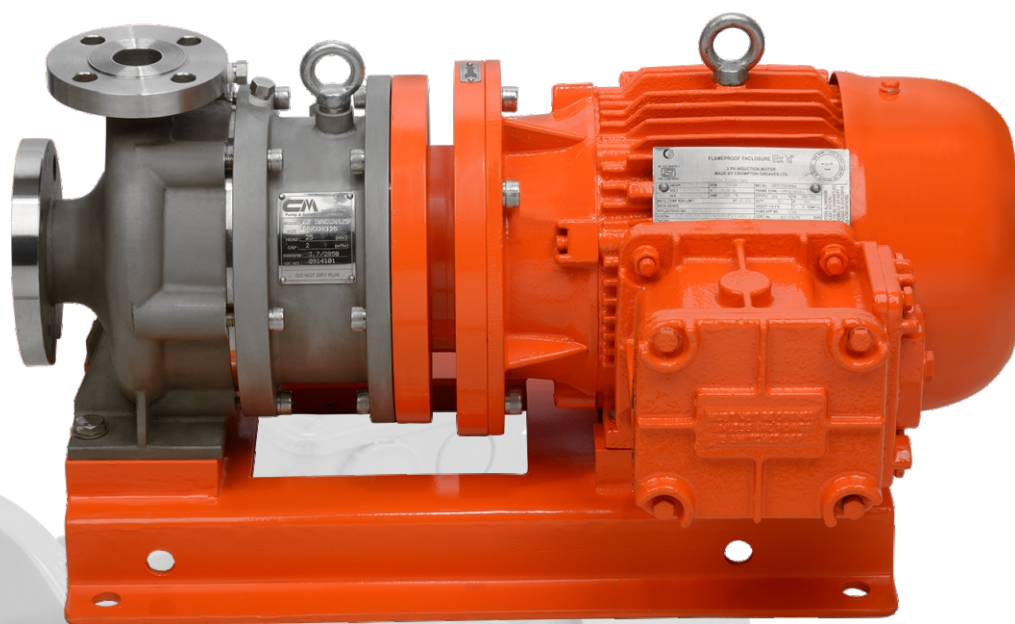

Description

- Single Stage, Horizontal Centrifugal Pump.
- Hydraulic Performance and Dimensions according to DIN EN ISO 2858
- Technical design based on DIN EN ISO 15783
- Permanent Magnet Drive
- Maintenance Free
- Separation of Liquid Chamber to Atmosphere by Means of Isolation Shell
- Slipless Power Transfer
- Materials : Steel, Stainless Steel, Nickel Based Materials
- Close Coupled Block Design
- Hydraulically balanced impeller for minimum bearing loads
- Product-Lubricated Journal Bearings; made of Silicon Carbide (SSiC) or Customized Materials

CZ Series – SS Magnetic Drive Chemical Process Pump (Close Coupled)

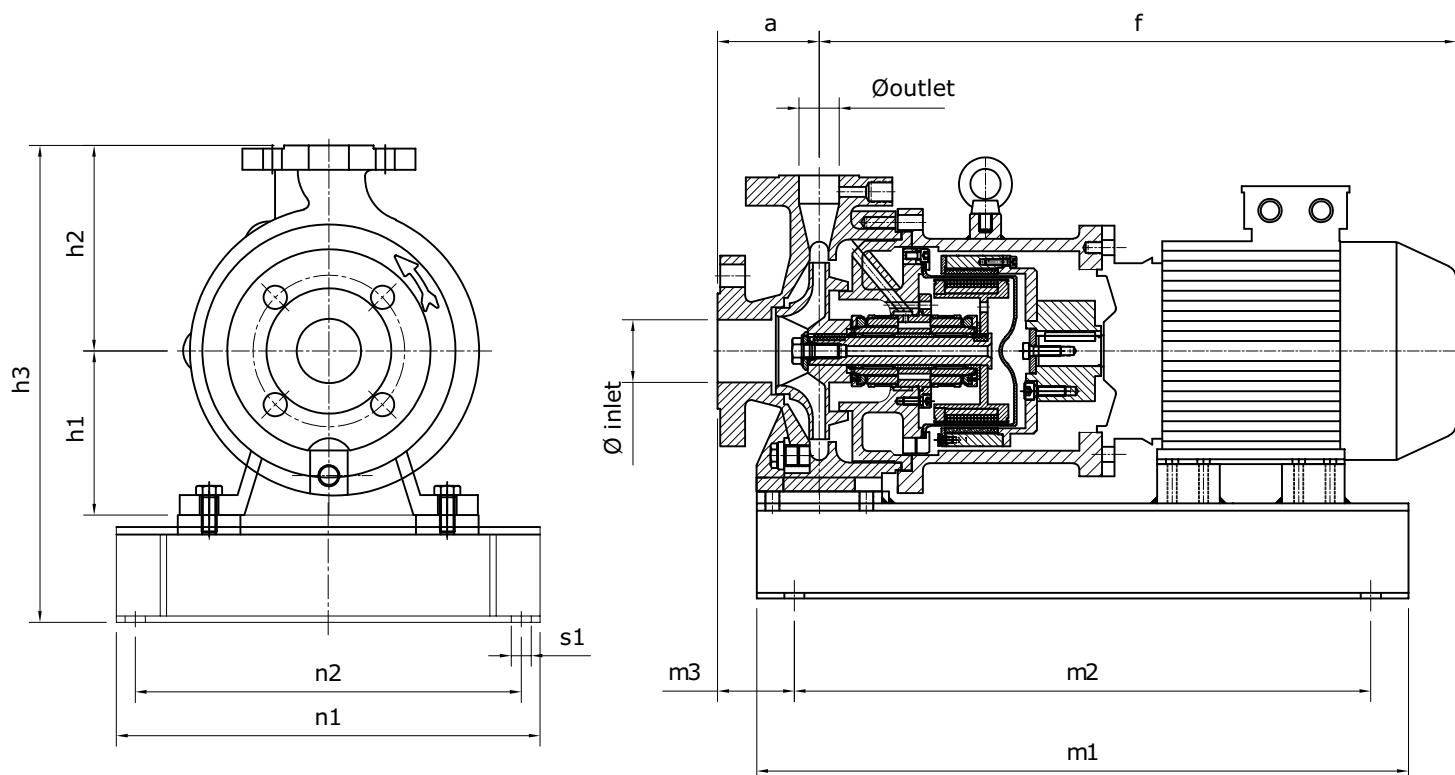

Technical Data

Operation Range
 Flow Rate : max. 100m³/h
 Delivery Head : max. 100 metre
 Pressure Rating : Class 150
 Temperatures : -35°C to +250°C
 Kinematic viscosities : 0.5 to 350 mm²/s

Casing & Impeller Materials

Stainless steel SS 316, SS 316L, SS 304, SS 304L
 Other materials duplex alloys , nickel-base alloys
 (e.g. Hastelloy®),

Working Principle	:	Radial flow pump
Stages	:	Single stage
Priming Method	:	Flooded suction
Sealing System	:	Magnetic coupling
Standards	:	DIN EN ISO 2858 /ANSI
Standards	:	DIN EN ISO 15783 /ANSI
ATEX	:	2014/34/EU 

2 POLE (2900 RPM)


Pump Model	Size Description			Nominal duty point		Dimension in millimetres															
	Ø inlet mm	Ø outlet mm	impeller (nominal) mm	Q m³/h	H m	Pump				Support							Motor				
						a	f	h1	h2	h3	m1	m2	m3	n1	n2	S1	hp	kw	rpm	Rated amps	
CZ 25 x 25 -125	25	25	125	4	20	82	425	112	142	340	465	405	62	300	270	Ø16	1	0.75	2900	1.6	
CZ 32 x 25 -125	32	25	125	5	20	82	475	112	142	340	465	405	62	300	270	Ø16	1.5	1.1	2900	2.3	
CZ 32 x 25 -150	32	25	150	5	30	82	475	112	142	340	465	405	62	300	270	Ø16	2	1.5	2900	3.1	
CZ 50 x 32 - 125	50	32	125	12.5	20	80	665	112	140	338	604	554	46	338	308	Ø16	3/5	2.2/3.7	2900	4.3/7	
CZ 50 x 32 - 160	50	32	160	12.5	32	80	665	132	160	380	604	554	46	338	308	Ø16	5/7.5	3.7/5.5	2900	7/10	
CZ 50 x 32 - 200	50	32	200	12.5	50	80	720	160	180	430	700	675	50	350	320	Ø16	10/12.5	7.5/9.3	2900	13.7/16.5	
CZ 50 x 32 - 250	50	32	250	12.5	80	100	800	180	225	490	700	675	50	400	370	Ø16	15/20	11/15	2900	19.3/26	
CZ 65 x 40 - 125	65	40	125	25	20	80	665	112	140	338	604	554	46	338	308	Ø16	5/7.5	3.7/5.5	2900	7/10	
CZ 65 x 40 - 160	65	40	160	25	32	80	665	132	160	380	604	554	46	338	308	Ø16	7.5/10	5.5/7.5	2900	10/13.7	
CZ 65 x 40 - 200	65	40	200	25	50	100	800	160	180	430	700	675	50	350	320	Ø16	12.5/15	9.3/11	2900	16.5/19.3	
CZ 65 x 40 - 250	65	40	250	25	80	100	850	180	225	500	750	700	50	450	410	Ø16	20/30	15/22.5	2900	26/37.5/	
CZ 80 x 50 - 125	80	50	125	50	20	100	700	132	160	380	650	600	50	338	308	Ø16	7.5/10	5.5/7.5	2900	10/13.7	
CZ 80 x 50 - 160	80	50	160	50	32	100	800	160	180	430	650	600	50	338	308	Ø16	12.5/15	9.3/11	2900	16.5/19.3	
CZ 80 x 50 - 200	80	50	200	50	50	100	900	160	200	470	750	700	50	450	410	Ø16	20/30	15/22.5	2900	26/37.5	

4 POLE (1450 RPM)

Pump Model	Size Description			Nominal duty point		Dimension in millimetres															
	Ø inlet mm	Ø outlet mm	impeller (nominal) mm	Q m³/h	H m	Pump				Support								Motor			
						a	f	h1	h2	h3	m1	m2	m3	n1	n2	S1	hp	kw	rpm	Rated amps	
CZ 25 x 25 -125	25	25	125	2	5	82	400	112	142	340	440	400	62	300	270	Ø16	0.25	0.18	1450	0.56	
CZ 32 x 25 -125	32	25	125	3	5	82	400	112	142	340	440	400	62	300	270	Ø16	0.25	0.18	1450	0.56	
CZ 32 x 25 -150	32	25	150	3	10	82	450	112	142	340	440	400	62	300	270	Ø16	0.5	0.37	1450	1	
CZ 50 x 32 - 125	50	32	125	6.3	5	80	600	112	140	338	580	530	46	338	308	Ø16	0.5	0.37	1450	1	
CZ 50 x 32 - 160	50	32	160	6.3	8	80	600	132	160	380	580	530	46	338	308	Ø16	1	0.75	1450	1.7	
CZ 50 x 32 - 200	50	32	200	6.3	12.5	100	600	160	180	430	650	600	50	350	320	Ø16	1.5	1.1	1450	2.4	
CZ 50 x 32 - 250	50	32	250	6.3	20	100	650	180	225	490	650	600	50	400	370	Ø16	3	2.2	1450	4.3	
CZ 65 x 40 - 125	65	40	125	12.5	5	80	600	112	140	338	580	530	46	338	308	Ø16	1	0.75	1450	1.7	
CZ 65 x 40 - 160	65	40	160	12.5	8	80	600	132	160	380	580	530	46	338	30	Ø16	1.5	1.1	1450	2.4	
CZ 65 x 40 - 200	65	40	200	12.5	12.5	100	600	160	180	430	650	600	50	350	320	Ø16	2	1.5	1450	3	
CZ 65 x 40 - 250	65	40	250	12.5	20	100	650	180	225	500	650	600	50	450	410	Ø16	4	3	1450	7.8	
CZ 80 x 50 - 125	80	50	125	25	5	100	650	132	160	380	580	530	50	338	308	Ø16	1.5	1.1	1450	2.4	
CZ 80 x 50 - 160	80	50	160	25	8	100	700	160	180	430	580	530	50	338	308	Ø16	2	1.5	1450	3	
CZ 80 x 50 - 200	80	50	200	25	12.5	100	750	160	200	470	650	600	50	450	410	Ø16	4	3	1450	7.8	

NOTE : 1) All above Motor KW (HP) selection is as per water.
2) Motor KW (HP) will be change as per liquid specific gravity.

CZB Series – SS Magnetic Drive Chemical Process Pump (Frame Mounted)

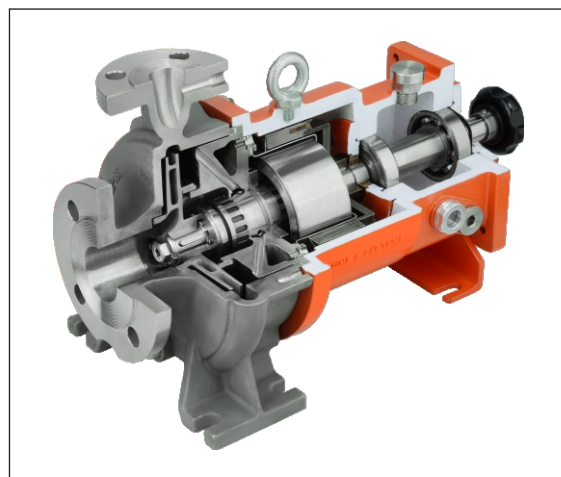

Description

- Single Stage, Horizontal Centrifugal Pump.
- Hydraulic Performance and Dimensions according to DIN EN ISO 2858
- Technical design based on DIN EN ISO 15783
- Permanent Magnet Drive
- Maintenance Free
- Separation of Liquid Chamber to Atmosphere by Means of Isolation Shell
- Slipless Power Transfer
- Materials : Steel, Stainless Steel, Nickel Based Materials
- Frame Mounted Design
- Hydraulically balanced impeller for minimum bearing loads
- Product-Lubricated Journal Bearings; made of Silicon Carbide (SSiC) or Customized Materials

Technical Data


Operation Range
 Flow Rate : max. 100m³/h
 Delivery Head : max. 100 metre
 Pressure Rating : Class 150
 Temperatures : -35°C to +250°C
 Kinematic viscosities : 0.5 to 350 mm²/s

Casing & Impeller Materials

Stainless steel SS 316, SS 316L, SS 304, SS 304L
 Other materials duplex alloys , nickel-base alloys
 (e.g. Hastelloy®),



Working Principle : Radial flow pump
 Stages : Single stage
 Priming Method : Flooded suction
 Sealing System : Magnetic coupling
 Standards : DIN EN ISO 2858 / ANSI
 Standards : DIN EN ISO 15783 / ANSI
 ATEX : 2014/34/EU 

CZB Series – SS Magnetic Drive Chemical Process

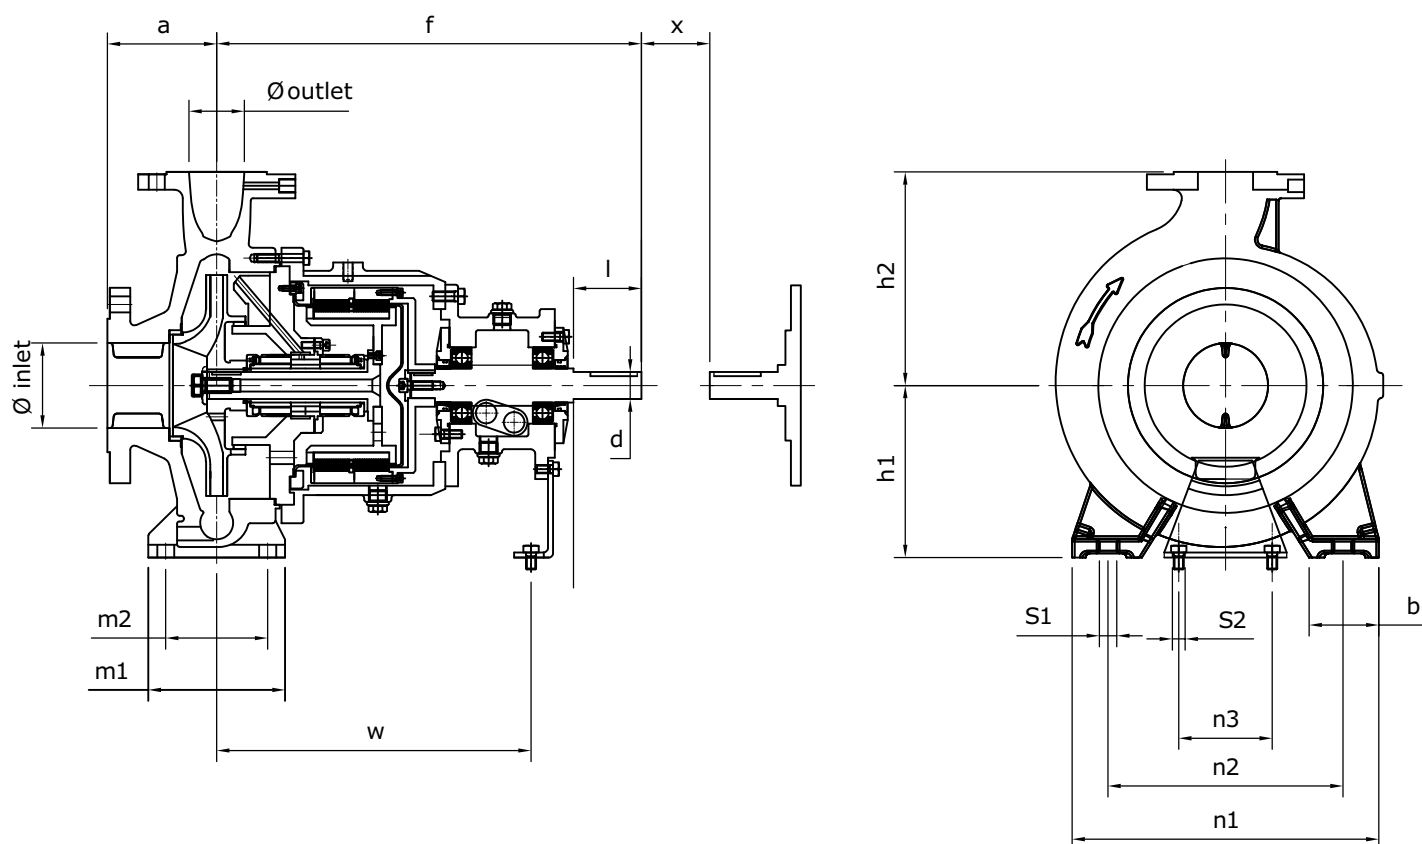

Pump Model	Size Description			Nominal duty point				Dimension in millimetres																		
	Ø inlet mm	Ø outlet mm	impeller (nominal) mm	n 1450 min		n 2900 min		Pump				Support						w	Clearance holes for bolts		Shaft end					
				Q	H	Q	H																			
				m³/h	m	m³/h	m	a	f	h1	h2	b	m1	m2	n1	n2	n3		S1	S2	d	l		x		
CZB 25 x 25 -125	25	25	125	2	5	4	20										270	M12	M10	20	35	15				
CZB 32 x 25 -125	32	25	125	3		5		80	312	112	142	50	100	80	190	140	50									
CZB 32 x 25 -150	32	25	150		10		30																			
CZB 50 x 32 -125	50	32	125	6.3	5	12.5	20			112	140	50	100	70	190	140	110	285	M12	M12	24	50	100			
CZB 50 x 32 -160	50	32	160		8		32	80	385	132	160				240	190										
CZB 50 x 32 -200	50	32	200		12.5		50			160	180															
CZB 50 x 32 -250	50	32	250		20		80	100	500	180	225				65	125								95	320	250
CZB 65 x 40 -125	65	40	125	12.5	5	25	20	80	385	112	140	50	100	70	210	160	110	285	M12	M12	24	50	100			
CZB 65 x 40 -160	65	40	160		8		32			132	160				240	190										
CZB 65 x 40 -200	65	40	200		12.5		50			160	180				265	212										
CZB 65 x 40 -250	65	40	250		20		80			500	180				225	65								125	95	320
CZB 80 x 50 -125	80	50	125	25	5	50	20	100	385	132	160	50	100	70	240	190	110	285	M12	M12	24	50	100			
CZB 80 x 50 -160	80	50	160		8		32			160	180				265	212										
CZB 80 x 50 -200	80	50	200		12.5		50			200																
CZB 80 x 50 -250	80	50	250		20		80			125	500				180	225								65	125	95
CZB 100 x 65 -125	100	65	125	50	5	100	20	100	385	160	180	65	125	95	280	212	110	285	M12	M12	24	50	100			
CZB 100 x 65 -160	100	65	160		8		32			200																
CZB 100 x 65 -200	100	65	200		12.5		50			225	320				250											
CZB 100 x 65 -250	100	65	250		20		80			125					200	250								80	160	120

Performance Curves

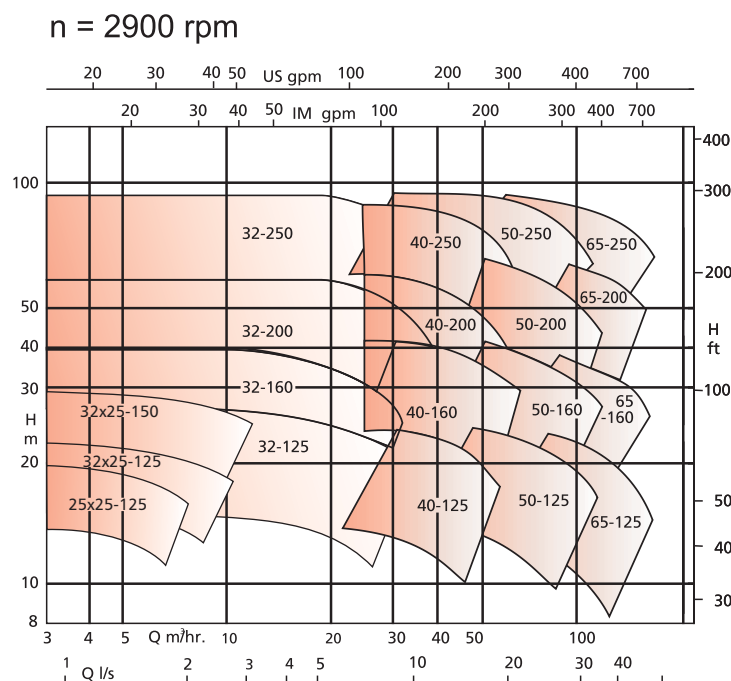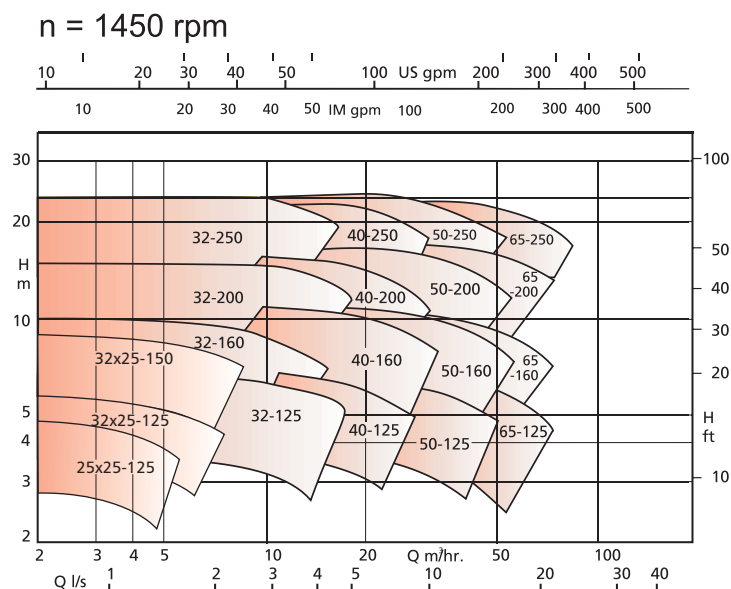

Industries

- Chemical Processing : basic and fine chemicals
- Agrochemicals, speciality chemicals
- Pharmaceuticals
- Biotechnology processing
- Food and beverage
- Pulp and Paper

Processes

- Aseptic Processes
- Chlor-alkali electrolysis
- MDI Processes
- Refrigeration and heating cycles
- Tank unloading
- TDI Processes


Fluids

- Hydrogen peroxide
- Molten Sulphur
- Nitric Acid
- Oleum
- Phosgene
- Phosphoric acid
- Potassium hydroxide solution
- Sodium hydroxide solution
- Sulphuric acid
- Toluene
- Solvents
- Alkalis
- Toxic liquids
- Corrosive liquids

Basic Components



Cartridge Bearing

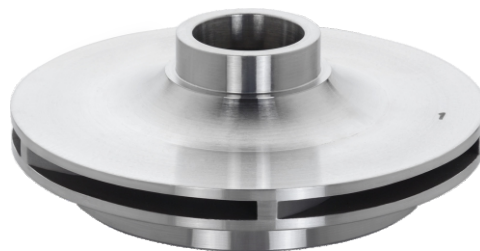

Impeller



Drive Magnet



Casing



Casing Cover



Can



Driven Magnet



Shaft



DISTRIBUTOR



Head Office : Unit No. 10, 1st Floor, Shamroz Indl. Estate,
Ram Mandir Road, Opp. Movie Star Cinema,
Goregaon (W), Mumbai - 400104. Maharashtra (INDIA)

Tel.: +91-22-26764504 / 05

Email: info@cmpumps.com / cmpumpsystems@gmail.com

Website : www.cmpumps.com

Factory: Plot No. 36-37, Khali Char Rasta, Near Meena Hotel, Khali,
Ta.: Siddhpur, Patan – 384151 GUJARAT, (INDIA).