
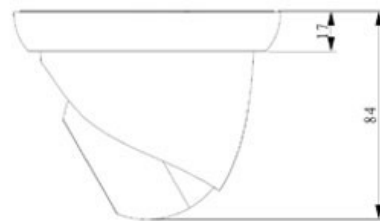


CP-UNC-DA13L3**1.3 MP HD IR Dome Camera - 30Mtr.****Main Features**

- 1/3" 1.3MP PS CMOS Image Sensor
- Max 25fps@1.3MP
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- 3.6mm fixed lens (2.8mm, 6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

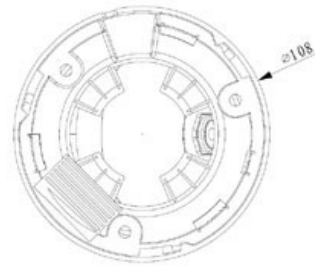

CP- UNC-DA13L3

1.3 MP HD IR Dome Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Privacy Mask
ICR

Protocol

Ethernet
User Account
Smart Phone
IR

Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/3" 1.3MP Progressive scan CMOS
0.01Lux/F2.1(Color), 0Lux/F2.1(IR on)
Auto/Manual, 1s~1/100000s
Auto/Manual
3.6mm(2.8mm, 6mm optional)
Auto/Manual
More than 50dB
BLC/ HLC/ DWDR
Main Stream: 1.3M/720P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
1.3M(1280x960) /720P(1280x720) / D1(704x576/704x480) /CIF(352x288/352x240)
Up to 4 areas
Auto(ICR)/Color/B/W
IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, PSIA, CGI
RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
-30°C~+60°C, Less than 95%RH
DC12V, PoE (802.3af)
Max 3.8W
IP67
Φ108mm×84mm
0.25Kg(with package 0.38Kg)