



SWITECK INDIA

CONSTRUCTION EQUIPMENTS

Welcome to Switeck India



Switeckindia



SWITECK INDIA / VAIBHAV GROUP



Switeck India



+91- 8882959755
+91- 7533025517



www.switeckindia.com, www.switeckindia.in, www.switickindia.co.in

ABOUT US — ●

Switeck India Construction is a recognized association occupied with assembling, sending out and wholesaling ideal quality Trimix Flooring System, Tower Hoist, Monkey Lift, Concrete Cutter, Concrete Mixer, Concrete Batching Plant, Road roller, Bar Cutting Machines, Bar Bending Machines and Suspended Platforms that are accessible in routine and high recurrence sort. Our range finds broad application in different businesses, for example, development, mining, hardware and others.

Every one of our endeavors are coordinated by our guides Mr. B K Mehra, who has Many years of unlimited modern involvement in the field that is exceptionally helpful for creating market driving business procedures.

We hold fast to worldwide standard to create our assortment. Efficiently took care of by our steady team, we have cutting edge assembling and outlining unit to make accuracy designed scope of vibrators. Attributable to the actually propelled plan, our range can withstand unforgiving conditions proficiently and adequately.

Our organization has canalized every one of its works towards satisfying the variegated necessities of our customers in all perspectives. For this, we offer the office of tweaked answers for enhance the nature of our items and grant ideal incentive for cash to our customers.

Our Product Range:

- (1) Trimix Flooring Machine/Vacuum Dewatering Flooring (Dewatering pump, Power Floater, Power Trowel, Screed vibrator, Top Mat, Filter Mat, Electric Panel Board Small and Large, Tool box, Electric link 15 Meter with Each Electric power machine and Suction Pipe)
- (2) Truss Screed, Edeger floater/trowel, bull floater, Texturing Brush
- (3) Concrete Roller Screed Paver
- (4) Ride in Trowel
- (5) Laser screed
- (6) Groove cutting machine (Concrete/Asphalt Cutter)
- (7) Earth compactor/ Plate compactor
- (8) Ride on roller/Road Roller
- (9) Walk Behind Roller
- (10) Bar Cutting Machine
- (11) Bar Bending Machine
- (12) Ring Making Machine
- (13) Concrete Mixer (Mech/Hyd. Hopper)
- (14) Mini mobile Batching Plant (Concrete batching plant)
- (13) Builder Hoist (Tower Hoist)
- (14) Monkey Lift
- (15) Suspended Platform
- (16) Needle Vibrator Petrol Eng. & Electrical
- (13) Ring Making Machine (manual Automatic)
- (14) Lab Testing Equipments
 - A. 3D shape Testing Machine (CTM) Manual, Electric Motorized and Digital
 - B. Cube Moulds & Slump Cone





Vacuum Dewatering Pump

Model	SKI/VP-24
Dewatering Capacity	24Sqr. Meter in a single Operation
Power Rating	7.5 HP 3 Phase Electric Motor
Electric cable	10 Meter

POWER TROWEL

Model	SKI/PT-P
Handle Height	Adjustable
Disc/Blade Thickness	4mm/2mm
Power	5 HP
Prime Mover Motor	Crompton/ABB/Bharat Bijlee



POWER FLOTERS

Disc	5MM
Power	5HP 3 Phase Electric
Prime Mover	Crompton/ABB/Bharat Bijlee
Elec. Cable	15 meter


Double Beam Screenshot Board Vibrators

Model	SKI/SV-4
Lenght	4.2 Meter
Power Rating	1 HP 3 Phase Electric Vibratory
Prime Mover	Vibratory motor



Electric Panel Board

Model	SKI/PB-15& 25
Power	3 Phase Electric
Prime Mover	L&T/Schneider





Concrete Screed Pavers Machine

Model	Switeck CRSPM-5m
Machine width	5m, 4m Working
Diameter of Roller	219mm
Quantity of Roller	Roller & 1 Anger
Travel Speed	0-3m/min
Vibrator Details	50mm Dia, 2m length, 8 Nos
Walking Tube Rotation Rate	36rpm
Max Paving Thickness	300mm
Electric Motor	380V/50HZ
Vibrator Motor Power	1.5 KW
Lifting Motor Power	1.5 KW
Traveling Motor Power	3 KW
Auger Motor Power	4 KW


Truss Screed

Engine / Motor	Air cooled, -cycle, Gasoline	Electric
Engine Model Motor	Honda Gx160	ABB, Crompton/ Havells
Power	5.5	3HP
Max Rotate speed	3600RPM	2880RPM
Screed Length	3-12m	3-12m
Material of Body	Steel/ Aluminum	Steel/ Aluminum
Dimensions	L*400*960mm	L*400*960mm
Travel speed	8-10m/min	8-10m/min
Max Paving thickness	260mm	260mm



Concrete Screed Pavers Machine

Model	CVS-25 C
Weight kb (lb)	25 (55)
Dimension	2000(98)*1400(55)*960(38)
Engine / motor	Air-cooled, 4 cycle, Gasoline
Type	Honda GX 35
Maximum Output	1.2 (1.6) kW (HP)
Maximum Speed	5200 RPM
Fuel Tank Liter (gal)	0.65 (0.17)





Concrete Groove Cutting Machine Electric Operated

Model:	SKI/GCM-10m	SKI/GCM-M	SKI/CGM-30M
Max Depth Cut	(2" to 6" inch)	(2" to 10" inch)	(2" to 16" inch)
Prime Mover	10 HP 3 Phase Electric	20 HP 3 Phase Electric	30 HP 3 Phase Electric
Make	Motor ABB, Crompton	Motor ABB, Crompton	Motor ABB, Crompton
Blade Size	12" to 18"	14" to 32"	14" to 44 inch



Concrete Groove Cutting Machine Eangine Operated

Model :	SKI/GCM- 10E	SKI/GCM- 13E	
Max Depth Cut	(2" to 6" inch)	(2" to 8" inch)	
Prime Mover	10 HP	13 HP	
Eangine Make	Greaves Cotton/ Honda	VST SHAKTI / HONDA	
Blade Size	12" to 18"	14" to 30"	



SWITECK INDIA

CONSTRUCTION EQUIPMENTS



Concrete Curb Cutting Machine Engine Operated

Model	SKI/CURB - 10C
Max. Depth	(2" to 8" inch)
Prime Mover	10 HP
Make	Greaves Cotton / Honda
Blade Size	14" to 24"

Power Floating With Engine / Motor

Model	SKI/PTE - 36
Handle Height	Adjustable
Disc Thickness	3 mm
Blade Thickness	2 mm
Prime Mover - Engine	5.5 HP HONDA / Crompton /ABB
Motor	3 HP 3 Phase




Ride on Trowel

Engine	Gasoline, Honda GX-670 (24 HP. With Electric Start)
Max Rotate Speed	3600
Oil Tank Capacity	12 L.
Blade Quantity	8 PCs.
Disc	2 nos.
Working Speed	150-155 RPM
Working Diameter	1890*915 MM
Dimension	1980*102*1500 MM
Package Size	2060*1170*1110 MM
Weight	338 KG Apr.....



Edger Trowel

Model	QJM 600
Working Diameter (mm)	600
Engine Type	Honda GX 160
Max. Output (Hp)	5.5
Weight (Kg)	53

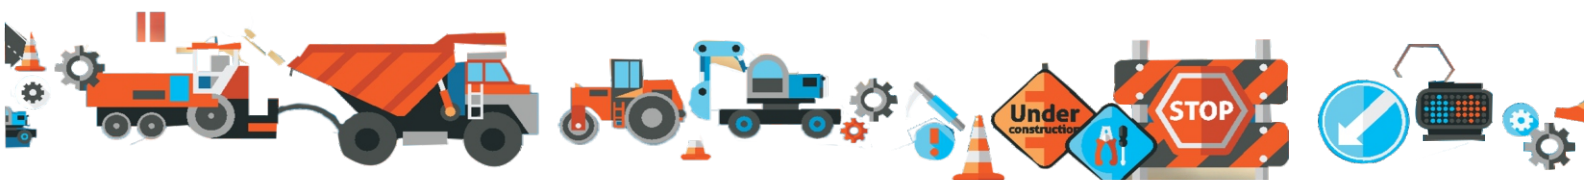

Laser Screed Machine:



Model	YG-25-2	YG-25-4
Motor Power	3.0kw 220v	32.5kw 24.2hp
Oil Tank Volume	18L (Work 10h)	35L
Walking Speed	0-20m/min	0-55m/min
Vibration Motor Speed	4000rpm	4000rpm
Exciting Force	2000N	2000N
Vibrating Plate Width	2500mm	2500mm
Leveling Thickness	50-250mm	350mm
Laser Control System	American Imported Danfoss	
Laser Launcher System	American Tianbao launcher	
Laser Receiver System	Switzerland Leica receive	
Dimension	3220*2780*1172mm	3370*2890*1850mm
Weight	280kg	800kg



CONCRETE POLISHING MACHINE


MODEL	DY-686
WEIGHT (KG)	170
DIMENSION (MM)	1120X720X900
WORKING DIAMETER (MM)	686
SPEED (RPM)	2200
MAX. OUTPUT (KW)	7.5
DISC DIAMETER (IN)	27"



CONCRETE GRINDING & POLICY



MODEL	DY-580	DY-640	DY-720
WEIGHT (KG)	255	280	300
VOLTAGE (V)	980	380	380
WORKING WIDTH (MM)	580	640	700
INVERTER (KW)	7.5	11	11
MOTOR POWER (KW)	7.5	7.5	11
MILL SPEED (RPM)	0-1800	0-1800	0-1800

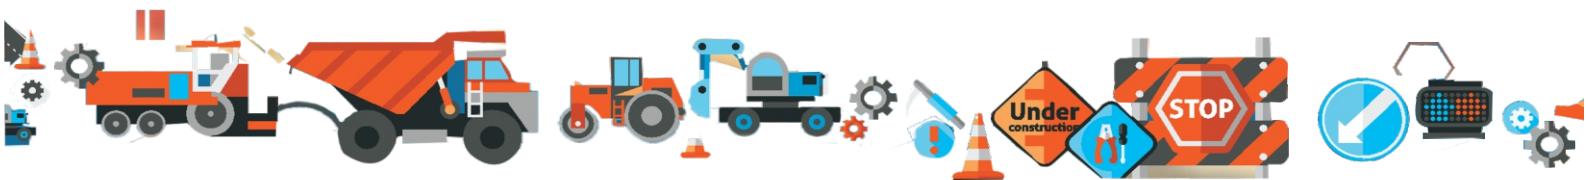

SWITECK INDIA

CONSTRUCTION EQUIPMENTS




Monkey Lift (Remote Operated)



Monkey Lift / Mini Lift

Model	SKI - 100M	SKI - 600M	SKI - 500M	SKI - 400M	SKI 250Mi
Job Working	9.5 Feet	7.5 Feet	7.5 Feet	7.5 Feet	5 Feet
Capacity	1000 Kg	500 Kg	500 Kg	500 Kg	500 Kg
Base Space	12ft X 7ft	10ft X 5ft	10ft X 5ft	10ft X 5ft	10ft X 5ft
Movement	360	360	360	360	360
Round Pipe	MS140MM	MS140MM	MS140MM	MS140MM	MS140MM
Stand Height	5.5ft	5.5ft	5.5ft	5.5ft	5ft
Motor	10H.P.	7.5H.P.	7.5H.P.	5H.P.	7H.P.
Rope	12mm	12mm	12mm	12mm	12mm
Boom Length	9 ft.	7 ft.	7 ft.	7 ft.	5 ft.
Bucket	2 Nos	2 Nos	2 Nos	2 Nos	2 Nos

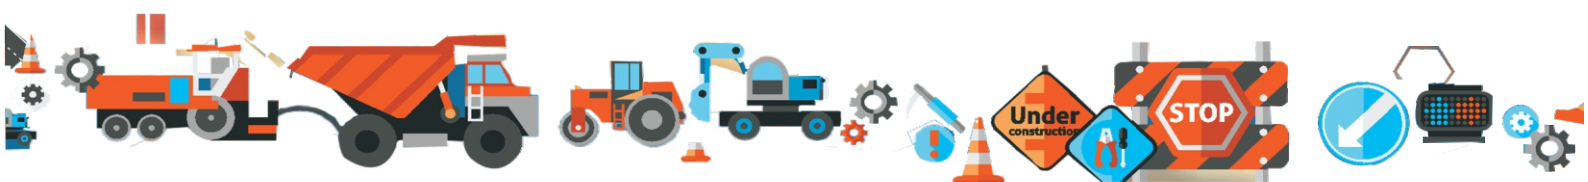

SWITECK INDIA

CONSTRUCTION EQUIPMENTS

Passenger Hoist

Model	SKI - 100p
Description	Switeck Rack & Pinion Hoist Multi Functional Hoist for Carrying Construction Material & rebar.
Drive Mechanism	Rack & Pinion
Max Height	100 Mtrs.
Height quoted/reacquired	75 Mtrs.
No. of Mast	50 Nos. (Including dead mast)
Net Capacity	100 Kg./1500 Kg./2000 Kg.
Cage Size (LxBxH)	2.5 x 1.5 x 2.25 Mtrs full cage
Dead mast	1.5 Mtrs dead mast is provided at the top without rack including in above height
Mast Finish	Hot dip Galvanized for longer life and protection against corrosion resistance.
Mast (mm)	400 x 500 x 1508 (triangular mast type)
Mast pipe (mm)	Front two leg are made form sq. tube 50x50x4 thickness, rear leg is made form Dip 48.8 high strength round pipe of 4 thickness
Base Frame Finish	PP powder coating for corrosion resistance
Wall the Internal	6
Wall the Finishing	Powder Coated
No. Of wall Tie	13 Nos.



Cradle System

Hoist Model	SKI - 800 SP
Rated Load	800 Kg.
Platform Size	2.5 Mtrs. x 3
Material of Platform	M.S.
Balance Weight	800 Kg.
Ascend Speed (Working speed)	11m/min
Wire Rope	8.6 MM
Rated Lifting Force	5 KN
Electric Motor	
Power	1.8 KW
Voltage	3 Phase
Breaking	15 NM
Speed Safety Lock	2 Nos.
Suspension JIB Mechanism	1 Nos. With turnbaucal.
Height Adjustment	1.15 m - 1.75 m
Front Beam Extension	1.1 m - 1.7 m



Builder Hoist

Height	Us Required
Weight Capacity	1000 Kg.
Bucket	10 Gauge Ms. Sheet Fitted with 14 mm Rod
Size of Chanel	50x100x50 mm (MAKE SAIL/ VIZZAK)
Size of Horizontal Angel	40x40x5 MM
Size fo Cross Angel	40x40x5 MM
Size fo Joint Angle	50x50x5 MM
Size of Joint Plate	65x8 MM
Bucket Volume	250 Ltrs.
Prime Mover	10/15 HP Electric Motor(Crompton/ABB)
Winch	Mechanical Winch/Geared Motor
Break System	Mechanical (Dual one si belt type and one is dog lock type)
Wire Rope Dia	14 mm (Mahadev Make) including top and bottom pulley



Concrete Mixer Non Hopper

A blue portable cement mixer machine with a green engine and a large black wheel. The machine is designed for mixing cement and is mounted on a sturdy frame with four wheels. It features a large, conical mixing drum and a hand crank for manual operation. The engine is located at the rear, and the entire unit is painted a vibrant blue.

Model	SWI/CM/MH-10/7
Unmixed Capacity	280 Ltrs. (10 cft.)
Mixed Capacity	200 Ltrs. (7 cft.)
Powered by	Air Cooled Diesel Engine 6 HP
Motor	7.5HP 3 Phase Electric
Mixing Drum	10 mm, 8 mm & 4 mm Thickness
Wire Rope	12 MM
Hopper	Mechanically operated
Chassis	Made of heavy duty channel 5"x2.5"
Iron Angle	6mmX65mm
Wheel	Pneumatic Wheel



Unmixed Capacity	280 Ltrs.
Mixed Capacity	200 Ltrs.
Powered by	Air Cooled Diesel Engine 10 HP
Motor	10 HP 3 phase electric
Mixing Drum	10 mm, 8 mm & 4 mm Thickness
Chassis	Made of heavy duty channel 5"x2.5"
Lift Height	55 Feet
Wheel	Pneumatic Wheel




SWITECK INDIA

CONSTRUCTION EQUIPMENTS



Mini Mobile Batching Plant

Particulars	SKI - 1050	SKI - 800	SKI - 400
Mixer	Reversible Drum (1050 LTR/850LTR)	Reversible Drum (800LTR/650LTR)	Reversible Drum (400LTR/350LTR)
Hopper(bins) Thickness	3x4 MM(THK)	3x4 MM(THK)	3x4 MM(THK)
Hopper Capacity	1500KG	1200KG	600KG
Output/hour	15 Hours	12 Hours	8 Hours
Discharge Height	1.5 METER	1.2 METER	1.2 METER
Drum Material	En8	En8	EN8
Electronic control panel	Semi Automatic With USB Printer Attachment	Semi Automatic With USB Printer Attachment	Semi Automatic With USB Printer Attachment
Main Drive Motor	15 hp, 3ph (abb/kirloskar)	10 hp, 3ph (abb/kirloskar)	7.5 hp, 3ph (abb/kirloskar)
Water Pump	1.5 hp, 3 hp - 2 nos (crompton)	1 hp, 3 hp - 2 nos (crompton)	1 hp, 3 hp - 2 nos (crompton)
Water Tank	250ltr	225ltr	225ltr
Water System	Digital Auto Cut	Digital Auto Cut	Digital Auto Cut
Hydraulic Pump	30 IMP, GEAR PUMP @ 200 BAR(DOUTY)	24 IMP, GEAR PUMP @ 200 BAR(DOUTY)	24 IMP, GEAR PUMP @ 200 BAR(DOUTY)
Hydraulic Cylinder	1	1	1
Wheels	Pneumatic Wheels 4 Nos.	Pneumatic Wheels 4 Nos.	Pneumatic Wheels 4 Nos.
Leveling Jack	Pin Type 4 Nos.	Pin Type 4 Nos.	Pin Type 4 Nos.
Wight system	Load Cell Based Digital Weighting System	Load Cell Based Digital Weighting System	Load Cell Based Digital Weighting System
Printer	Available	Available	Available

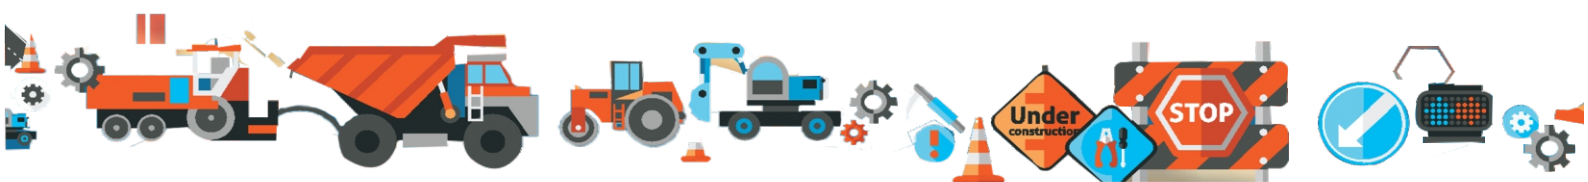

SWITECK INDIA

CONSTRUCTION EQUIPMENTS

Steel Bar Cutting Machine

MODEL	GQ- 40	GQ- 50	SKI- BCM 32	SKI- BCM 42
Cutting Range (mm)	32	40	32	42
Cutting Timing	2 /s per stroke	3 /s per stroke	2 /s per stroke	3 /s per stroke
Power (KW/HP)	3/5	4/6	3/5	4/6
Speed (rpm)	2880	2880	2880	2880
Voltage	3ph, 380V	3ph, 380V	2880	2880
Weight	390kg	550kg	550	750
Dimension L*H*W	1280*720*480	1280*720*480	1350*650*870	1350*650*870
Operated	Mechanic	Mechanic	Hydraulic	Hydraulic




Rebar Threading Machine

Model	HQS-40
Machine Range of Steel Bar	16-40 mm
Power Of Motor	4KW- 4HP
Roller Threading	7000-10000
Rotation Speed Of main shaft	41r/min
Max. Processing length	80 mm
Weight	480 kg

Scrap Straightening Machine

Model No.	GX6-14
Straightening diameter	6-14mm
Speed of working	28m/min
Cutting space	500-6000mm (can be longer)
Motor power	5.5KW + 2.2KW
Reducer	350
Weight	750 Kg.

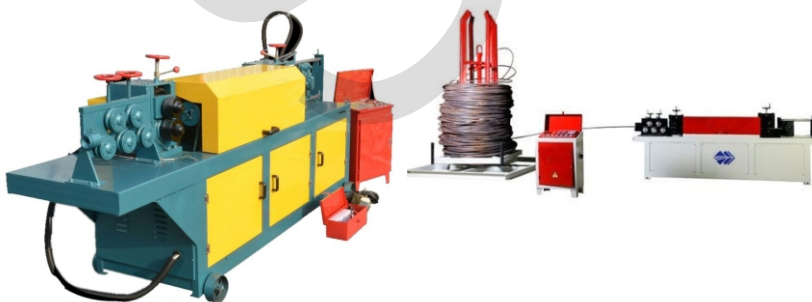

Rebar Decoiling Machine

Model	GTQ 5-12
Straightening diameter	5-12mm
Straightening speed	45- 55 m/min
Straightening Wheels	8 pics
Cutting Space	900mm
Error of Cutting Length	±0.5cm
Power	19KW
Weight	1800 k.g. Aprox.



SWITECK INDIA

CONSTRUCTION EQUIPMENTS

Rebar Bending Machine

MODEL	GW - 42	GW- 50	SKI- BBM 32	SKI- BBM 42
Bending Range (mm)	32	42	32	42
Power (KW) HP	3 / 5	4/7.5	3 / 5	4/7.5
Speed (rpm)	1440	1440	1440	1440
Working (rpm)	10 /rpm	10 /rpm	10 /rpm	10 /rpm
Voltage	3ph, 380V	3ph, 380V	3ph, 380V	3ph, 380V
Weight	320Kg	420kg	420Kg	500kg
Diameter of working disc		410 mm	920mm	920mm
Dimension LxHxW	900*930*880	1000x930x880	920X920X1200MM	920X920X1200MM



Ring Making Machine - SKI 20

Model	SKI GF20
Bending Machine	4 - 20 mm
Bending Angle	90/135
Speed (rpm)	20 - 30
Motor Power (KW)	22
Voltage	3hp, 415V
Weight	120Kg

Automatic Ring Making Machine

Production Capacity single wire	5 -13 [mm]
Bouble Wire	5-10 [mm]
Max. Bending Angle	±180° [Double Direction]
Max. Bending Speed	900 [/sec]
Max. Pulling Speed	100 [m/mm]
Mandrel Diameter	13 -30 [mm]
Length Tolerance	+1 [mm]
Bending Tolerance	+1°
Average air-compressed Consumption	6 [l/mm]
Average Electric Power Consumption	5 [kW / h]
Labelled Electric Power 45 kW	a) Traction Motor - 13kW b) Bending Motor - 7kW c) Cutting Motor - 4kW d) Air Compressor - 4kW
Voltage	415 V - 50 Hz



SWITECK INDIA

CONSTRUCTION EQUIPMENTS

Ride on Roller

Model	SVR - 1000	SVR - 850
Weight	1000kg Approx	750kg Approx
Walking speed	0-5km/h	0-4km/h
Turning Radius	2500mm	2500mm
Starting Way	Electrical Starting	Electrical Starting
Drive model	Hydraulic drive	Hydraulic drive
Walking model	Forward & Back	Forward & Back
Wheel size	540*Φ740mm 540*Φ800mm	700*Φ580mm
Vibrating Clutch Method	Electromagnetic	Electromagnetic
Centrifugal force	5 Tan Including Both Drum	3 Tan Including Both Drum
Vibration frequency	70 Hz	70 Hz
Grade ability	30%	30%
Engine	Air-Cooled Diesel Engine	Air-Cooled Diesel Engine
Starting	Hand & Electric	Hand & Electric



SVR - 1000




Walk Behind Roller (Single Drum)

Model	CYL06
Weight (Kg)	280
Engine Power	Honda GX160 5.5 HP
Water Tank(L)	30
Walking speed (Km/Hr)	0 - 4
Starting way	Manual
Drive mode	Hydraulic Drive
Walking Mode	Forward & Backward
Wheel size	450 x 600
Vibrating clutch Method	Automatic
Static Load N/m	45
Nominal amplitude	0.6
Centrifugal force(KN)	13.5
Vibration Frequency(Hz)	70
Grade ability	25%

Walk Behind Roller (Double Drum)

Model	CYL 31 D
Working width	650 mm
Vibratory Frequency	60 Hz
Grade Ability	20°
Centrifugal Force	3 Ton
Water tank Capacity	35 Lt
Drum size (Dia x W)	41 x 65 cm
Max Travelling Speed	2.5 Km/ Hr
Transmission System	MECHANICAL
N.W/G.W	740 Kg/ 780 Kg
QTY 20" / 40" / 40 HQ	24/48/48
Engine	10 HP Diesel

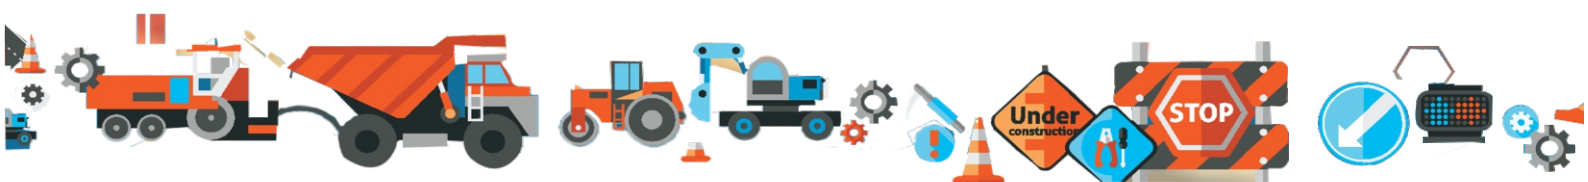

SWITECK INDIA

CONSTRUCTION EQUIPMENTS

Reversible Plate Compactor

Model	HZD 160
Width of Base	400mm
Operating Weight	160 Kgs
Centrifugal Force	11.5 KN
Frequency	90 Hz
Motor	3 KW



Reversible Engine Plate Compactor

Model	FPC 90
Plate Size (mm)	L500 * W450
Centrifugal Force (kn)	15
Working Diameter rpm(hz)	5500 (92)
Speed (m/min)	20-23
Engine	Air Cooled, 4-cycle, Honda GX 160
Max. Output KW (HP)	4.0 (5.5)
Max Speed (rpm)	3600
Fuel Tank (Liter)	3.6
Dimension mm	L1100 * W500 * H950
Weight (Kgs)	90



Rammer HCR 100

Model	HCR 100	HCD 100
Compaction Depth	300 mm	300 mm
Travel Speed	0-25m/min	8-10m/min
Jumping Times	460-650 times/min	460-650 times/min
Jumping Height	40-65 mm	40-65 mm
Impacting Force	20 KN	20 KN
Plate Size	300*330 mm	300*330 mm
Material	Aluminium Die-Casting Body, Bellows : Polyurethane Plate : Compressed wood & Iron plates	Machine Body: Cast Iron Bellows (Dust cover): Polyurethane Plate : Compressed wood & Iron plates
Engine / Motor	Single Cylinder, Four Stroke, Air cooled. Gasoline Honda GX160 5.5hp . Max rotate speed: 3600 rpm. Oil tank capacity : 3L	380 V/50 Hz 3KW , 3 Phase




HCR 100



BT High Frequency Vibrator Convertors

Input Voltage	200Hz
Power	42v
Model Name/Number	BTFC200/18/2
Capacity	1.8KVA
Input DC Voltage	3/50/380/2.8
Output DC Voltage	3/200/48/22

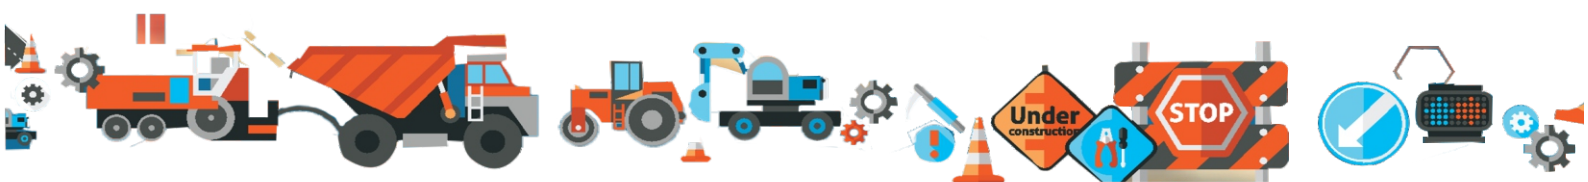


CONSTRUCTION EQUIPMENTS



Mixing System (Technical Parameter)	
Model	KMBH - 30
Reversible Drum	
Input Volume	1400Ltr.
Output Volume	1200Ltr.
Discharging Height	1.65m
Max. Aggregate Dimaeter (sense/crushed stone)	80/60mm
Mixing motor	20 H.P.

Electric Control System
Electric Control System is composed of host
Computer, Display, Communication cable
Weighting meter and so on.
Operation and management are incorporate microcomputer proportion prescriptions can be expressed by digits,
Easy to recognized by user. And it can preserve several Prescriptions.
It has the functions of error analysis and automation detection.
without automation, manual operation can still control the Mixing plant's batching, mixing discharging etc.
Introduction of the system

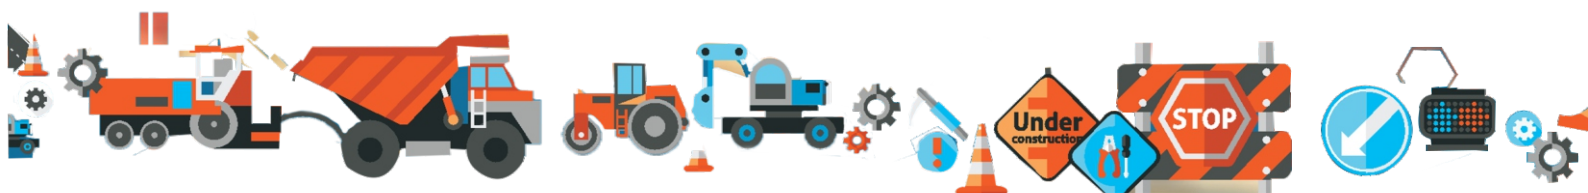

SWITECK INDIA

CONSTRUCTION EQUIPMENTS



Sand Screening Machine

Type	Vibrant Type
Operating	Electrically
Capacity	8 Cum/hr (input)
Power	2 Hp
Screen Dimention	600x1300
Motor (1400 rpm) fitted with Reduction Gear Box	
Weight	225 Kg.
Mesh	1"x1" Supoting Mesh Rplaceable 5mm x 5mm

Sand Screening Machine

Type	Rotarey Type
Operating	Electrically
Capacity	8 Cum/hr (input)
Power	1 Hp
Screen Dimension	600x1500
Motor (1400 rpm) Fitted with Reduction Gear Box.	
Weight	225 Kg.
Mesh	1"x1" Supoting Mesh replaceable 5mm x 5mm




Sand Screening

Type	Hand Operated Rotary Type
Operating	Mannual
Weight	94 Kg.

Sand Screening Plant

Capacity	40-45 Cum/h
Rotate by gear Box with motor	3HP
Conveyor belt drive motor	3Hp With Gear box
Conveyor Length	06 meter
Chasis Size	5x2 meter with conveyor
Cross angle size	40x5 mm
Conveyor length	12 Feet
Conveyor height from ground	03 meter
Feeding height from ground	05 meter
Stroage Capacity	2.5 Cum
Storage Bin Size	2.5x1.5x1.25
Electric Control Panel	1
Bin sheet thickness	03 mm
Conveyor belt guide with roller.	
Fitted with Discharge hopper for wastes	

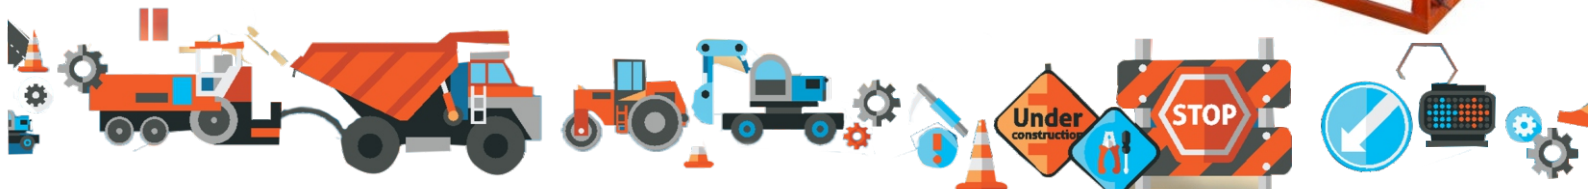

SWITECK INDIA

CONSTRUCTION EQUIPMENTS

Rail Drilling Machine

Power Consumption	PETROL ENGINE
Cutting Disc Size	14 inch
Machine Type	Automatic
Material	Steel
Model Name/Number	RAPID/AONE
Usage/Application	RAILWAY TRACK CUTTING MACHINE
Brand	SWITECK INDIA
Power Tool Type	YES
Size	Standard
Voltage	HONDA GX-200
Power Source	ENGINE
Color	GOLDEN YELLOW
Weight	35 KG
Adjustable Height	YES
Cutting Blade Size	14 TO 16 INCHES




Rail Cutting Machine

Power Consumption	Petrol
Model Name/Number	GX200
No Load Speed	3800 rpm
Cutting Disc Size	16 inch
Brand	SWITECK INDIA
Power Tool Type	Engine
Material	Mild Steel
Color	Yellow, Red, Black
Weight	43 kg
Adjustable Height	25 mm
Petrol Engine Power	6.5HP = 4.8KW

Rail Push Trolley

Material	MS
Load Capacity	0.7 ton
Dimension	1450 mm X 1550 mm
Brand	SWITECK INDIA
Surface Finishing	Polished
Power Source	Honda Engine

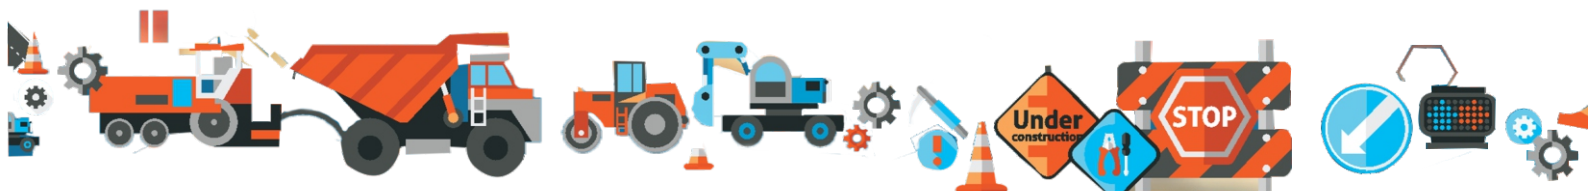

SWITECK INDIA

CONSTRUCTION EQUIPMENTS



Vacuum Dewatering Pump



POWER TROWEL



POWER FLOTTERS



Double Beam Screed Board Vibrators



Electric Panel Board



Concrete Screed Pavers Machine



Truss Screed



Concrete Screed Pavers Machine



Concrete Groove Cutting Machine Electric Operated



Concrete Groove Cutting Machine Engine Operated



Concrete Curb Cutting Machine Engine Operated



Power Floating With Engine / Motor



Ride on Trowel



Monkey Lift (Remote Operated)




Monkey Lift / Mini Lift



Passenger Hoist



Bull Floater



Texture Brush



Cradle System



Concrete Mixer With Lift



Builder Hoist



Concrete Mixer - Non Hopper



Concrete Mixer With Mechanical Hopper



Concrete Mixer With Hydraulic Hopper



Concrete Mini Mixer



Mini Mobile Batching Plant



Steel Bar Cutting Machine



Rebar Threading Machine



Scrap Straightening Machine



Rebar Decoiling Machine



Rebar Bending Machine



Ring Making Machine - SKI 20



Automatic Ring Making Machine

SWITECK INDIA

CONSTRUCTION EQUIPMENTS



Ride on Roller



Walk Behind Roller (Double Drum)



Walk Behind Roller (Single Drum)



Reversible Plate Compactor



Reversible Engine Plate Compactor



Rammer HCR 100



BT High Frequency Vibrator Convertors



Sand Screening Machine



Sand Screening Machine



Mixing System (Technical Parameter)



Sand Screening



Sand Screening Plant



Electric Control System



Rail Drilling Machine



Rail Cutting Machine




Rail Push Trolley



SWITECK INDIA

CONSTRUCTION EQUIPMENTS

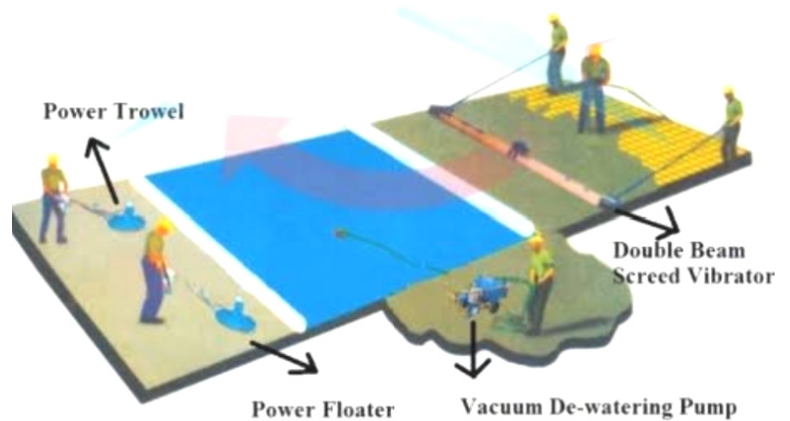

Corp. Off. : 2/17, A Block Rana Park, Siraspur, Delhi- 110042.

Factory : Gali No. 15, Samaypur Bawana Road
Near Samaypur Badli Metro Station Delhi- 110042

Phone : +91-8882959755, 7533025517

E-mail : switeckindia@gmail.com, info@switeckindia.com

Website : www.switeckindia.com, www.switeckindia.in, www.switickindia.co.in

