

# HIGH PRESSURE HYDRO JETTING KDD 95-22 MODELS

2018

CONDENSER BOILER HEAT EXCHANGER EVAPORATOR

# **HYDRO JETTING APPLICATIONS**

Afte

ube cleaning


ube cleaning

Heat Exchanger Tube Cleaning Equipment Condenser Tube Cleaning System Evaporator Tube Cleaning System Calandria Tube Cleaning Pump Hydro Jetting Machine for Boiler Tube Cleaning Industrial Tube Cleaning System





### KDD SERIES – KDD 95-22



- Field proven design.
- Forged S.S. pump head construction with high strength with Incorporated gear box.
- Pressure packing design with integrated cooling systems for long life of seal.
- In line suction / delivery Valve.
- Splash lubrication. Force feed lubrication with oil cooler / filter also available on request.
- Available in 10 versions.
- Manufactured on state-of-the-art machinery.
- Available direct couple driven.

Pump model	Flow (LPM)	Flow (GPM)	Pressure (Bar)	Pressure (PSI)	Motor H.P.	Engine H.P.
KDD 95-22	52	13.74	1100	15950	150	194
			880	12515	120	154
			750	10760	100	125
Note: - All pumps are suitable for 50 Hz and 60 Hz. Gear ratio will change as per Hz.						

We manufacture wide range of hydro jetting machines for the pressure ranging from **250 bar to 1400 bar**. Please visit <u>Quick Selection Chart</u> of Hydro Jetting Machine.



# HYDRO JETTING ACCESSORIES

## **SAFETY VALVE**

Safety valve is a very important accessory. It prevents major accidents form occurring in case of problem arising out of high pressure built up in line. It is standard on all PressureJet Pumps for temporary relief of excess system pressure.

### **Safety Valve**

- ✓ Provides over-pressure protection
- ✓ Ensures safety for operator
- ✓ Intentionally designed weak part to avoid major loss
- ✓ Pressure range up to 1400 bar 20,000 PSI.
- ✓ Flow rate range up to 80 LPM 21.13 GPM.



# PRESSURE REGULATING VALVE

A **pressure regulating valve** is a control valve that regulates the output pressure of the pump. Regulators are used for gases and liquids, and can be an integral device with an output pressure setting, a restrictor and a sensor. These may all be in the one body, or consist of a separate pressure sensor, controller and flow valve



### **Pressure Regulating Valve**


- Regulates output pressure as required
- Bypasses excess water
- Pressure range up to 1400 bar 20,000 PSI.
- ✓ Flow rate range up to 80 LPM 21.13 GPM.

# FOOT OPERATED VALVE

**Foot operated valves** are operated by foot paddle. These are mainly used in hydro jetting applications. Foot operated valve used for loading & unloading the pressure in the pump. They are designed for smooth and reliable operation of the pump.

### Foot Operated Valve (FOV)

- ✓ To start-stop and control water flow using the foot of an operator. Enables him keep his hands free for in-out movement of flexible lance inside tubes.
- ✓ Very essential for Operator safety, helps avoid accidents.



# HIGH PRESSURE FLEXIBLE LANCE

A **high pressure flexible lance** connects FOV to Nozzle. Tube or pipe cleaning Nozzle is attached to the end of the lance to clean tubes or pipes of various diameters.



### **High Pressure Flexible Lance**

- ✓ Smooth inner core surface to minimize pressure drop
- ✓ Small diameter pipes to easily enter inside ID of tubes.
- ✓ Specially designed to withstand high pressures.
- ✓ Available in various lengths as per requirement.
- Mainly used in hydro jetting applications of pressure up to 1400 bar. Available for tube ID size up to 60 mm.

## **HIGH PRESSURE RIGID LANCE**

In hydro jetting applications, a **high pressure rigid lance** provides easy and firm grip to counter back pressure at the time pf in and out movement of nozzle. A nozzle is attached to the end of the lance and the size of the nozzle provides certain pressure depending on the flow rate.

### **High Pressure Rigid Lance**

SS construction for long life.

Available in various lengths as per requirement



# **CONTROL PANEL**

A control panel is a flat, often vertical area where control or monitoring instruments are displayed. It has many controls like on/off button, Safety Shut-down switch, Voltage and Ampere readings etc...



### **Electric Control Panel**

#### **Electric Control Panel**


- For over and under voltage protection
  - Electric control panel has important and necessary controls like hour meter, volt meter, over load protection, etc.
  - Control panel comes with single phase and short circuit protection

# **HYDRO JETTING NOZZLE OPTIONS**











### **Tube Cleaning Nozzle Options**

- ✓ SS hardened nozzles, specially designed to suit high pressure
- ✓ Various nozzle sizes available to suit different applications and tube IDs ranging from min. 13 mm (1/2") to max. pipes of 1800 mm (72")
- Various hole patterns available for effective cleaning as per job requirement
- Conventional and Rotating both type of nozzles available
- Note: Detailed consultation will be provided up on request.

## **CONVENTIONAL TUBE CLEANING NOZZLES**






### **Conventional Tube Cleaning Nozzle**

- ✓ SS hardened nozzles, designed to suit high pressure
- ✓ Various sizes available to suit different tube IDs ranging from min. 13 mm (1/2") to max. pipes of 100 mm (4")
- ✓ Various hole patterns available for effective cleaning
- ✓ Note: Detailed consultation will be provided up on request.

 $\checkmark$ 





## **ROTATING TUBE CLEANING NOZZLE**





### **Rotating Tube Cleaning Nozzle**

✓ Highly effective and time saving than conventional.

- ✓ StoneAge-USA make patented design.
- ✓ Various sizes available to suit different Tube IDs ranging from min. 13 mm (1/2") to max. pipes of 1800 mm (72").
  - Note: Detailed consultation will be provided on request.

**PRESSURE GAUGE** 

**Glycerin Filled Pressure Gauge**, ideal for dampening the effect of pulsation and vibration. Widely demanded, it has a stainless steel case filled with glycerin to offer protection against harsh environments. It enhances the integrity and reliability of measuring system for long periods under extreme operating condition.

Note: - Available in various size as per requirement.



### **Pressure Gauge**

- Approx. 2 times pump operating pressure
- ✓ Glycerin filled
- ✓ Easy to read dial
- With needle valve

A **Safety Suit** is essential for workers who work with hydro jetting system on sites. The suit provides protection from injuries and accidents that may occur due to high pressure water jets.


### **Safety Suit**

✓ For protection of operator from high pressure water

✓ Essential for safety



# LINE DIAGRAM OF HYDRO JETTING SYSTEM

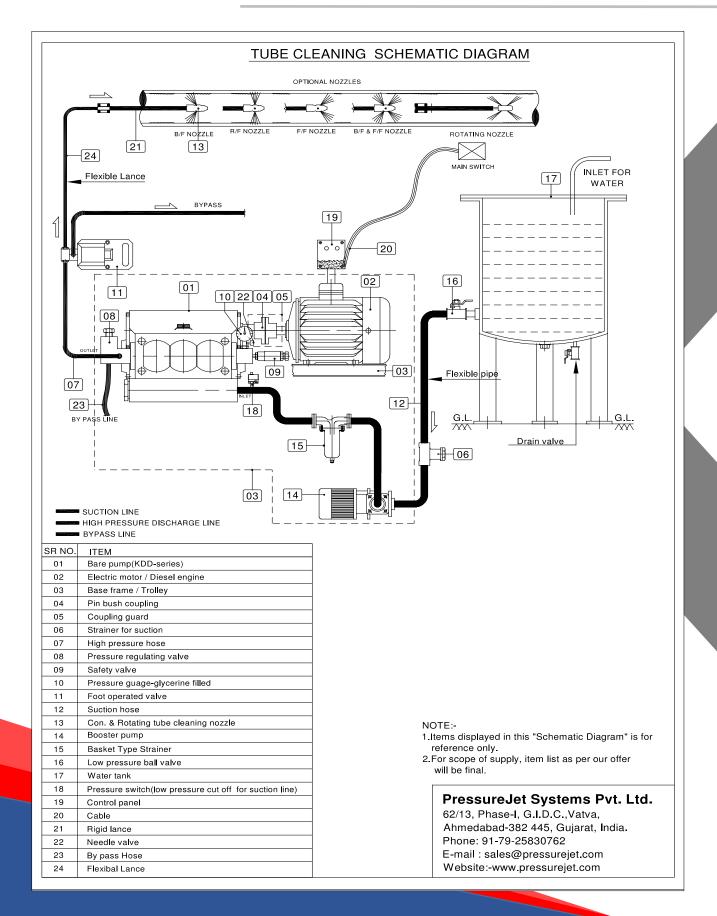

# **PARTIAL LIST OF CLIENTS**



**Important Note:** Owing to continuous R & D, technical details and specifications mentioned in this catalogue are liable to change anytime. All rights reserved with PressureJet. For latest Information & more details, please visit our website.

Our Website is fully informative, exhaustive and communicative. It is designed to provide maximum information in most precise form to help our valued customers to take a quick and right decision.

**Call Us** +91 93760 22358 +91-79-25830762/ 25893868

Write to us at sales@pressurejet.com

Visit YouTube www.pressurejet.com

Address PRESSUREJET SYSTEMS PVT. LTD.

62/13, Phase-1, Vatva GIDC Ahmedabad – 382 445, Gujarat, India



