




HandyArc 203i / 204i



HANDYARC
203i

HANDYARC
204i



Performance

- Excellent Weldability
- Powerful Stick welding
- Continuous Welds
- Suitable for E6013, E7018 & SS electrodes



Small on Size, Big on Performance - Versatile

Strength

- Robust Design
- Fiberglass molded housing
- OKC socket



Stands apart from Competition - Sturdy

Portability

- Ultra Light Weight
 - HandyArc 203i - 3.5Kg
 - HandyArc 204i - 3.7Kg
- Compact design
- Sturdy handle and shoulder strap



The Biggest thing to happen to Welders is “Small”

Easy to use

- Panel Setting


1. Power Indicator

2. Thermal Protection Indicator

3. Current Adjusting Knob

4. Power Switch

5. Power Cable

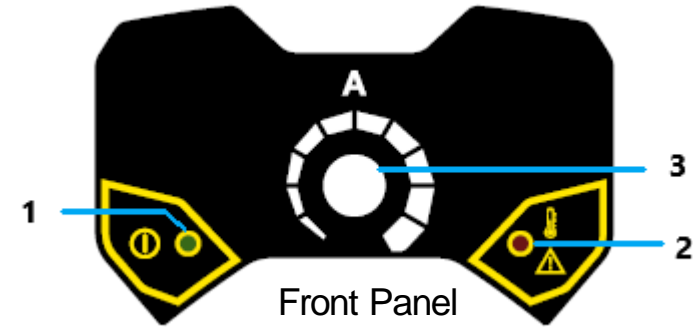

Simple design for the first-time user

Specifications

	HandyArc 203i	HandyArc 204i
Mains voltage, V, Ph , Hz	220 ± 10% , 1 , 50/60	220 ± 10% , 1 , 50/60
Rated Power , KVA	5.5	7.04
Max. input current, A	25	32
Open circuit voltage , V	65	75
Suitable Electrode size, mm	Upto 3.15	Upto 4.0
Power factor at maximum current	0.77	0.77
Power factor at maximum current,%	82	83
Enclosure class	IP 21S	IP21S
Dimensions (LxWxH),mm	300 x 115 x 232	300 x 115 x 232
Weight, Kg	3.5	3.7

The Biggest thing to happen to Welders is “Small”

Package

Box Contents:

- Power Source with 2.3m mains cable and plug
- Electrode Holder with 2m cable
- Ground clamp with 2m cable
- Shoulder strap



The Biggest thing to happen to Welders is “Small”

Promotions - WhatsApp Poster and Dangler





ESAB India Limited

13, 3rd Main Road, Industrial Estate, Ambattur, Chennai - 600 058.

Tel : 044 4228 1100 | Email: Info@esab.co.in | www.esab.com

VICTOR® // THERMAL DYNAMICS® // TWECO® // ARCAIR® // EXATON™ // STOODY® // ALCOTEC® // AMI®