

Let's catch  
the charm so

**CAPTIVATING**



Glazed Vitrified Tiles  
**600x1200mm**  
Rustic Finish

# Glazed Vitrified Tiles

600x1200mm | Rustic Finish

KERAON  
architecturesurfaces



WALL TILES



FLOOR TILES



RANDOM DESIGN



ZERO MAINTENANCE



CORRECT RECTIFIED



COMMERCIAL



INTERIOR




DOMESTIC

The success commercial stone industry solely depends upon defects in Rock/stone. Natural defects in ornaments / commercial rock deposits adversely



Cyprus Cotto

Glazed  
Vitrified Tiles  
600x1200mm | Rustic Finish

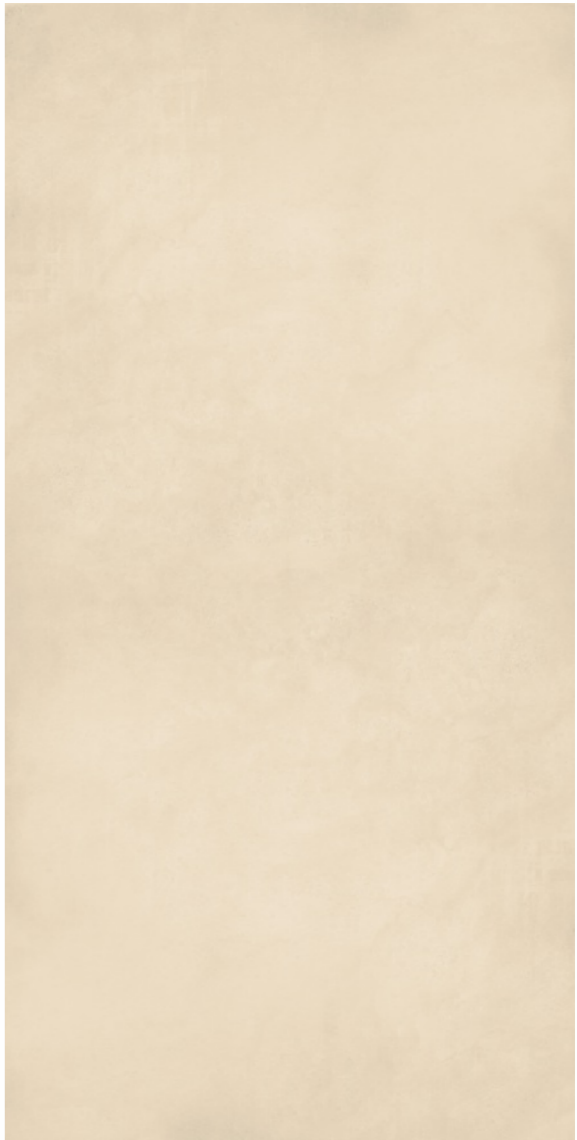

Cyprus Crema

Glazed  
Vitrified Tiles  
600x1200mm | Rustic Finish



Cyprus Gris

Glazed  
Vitrified Tiles  
600x1200mm | Rustic Finish



Cyprus Dark Grey

Glazed  
Vitrified Tiles  
600x1200mm | Rustic Finish



Cyprus Taupe

Glazed  
Vitrified Tiles  
600x1200mm | Rustic Finish



**KERACON**  
architecture surfaces



Cyprus Bianco


Glazed  
Vitrified Tiles  
600x1200mm | **Rustic** Finish





Attic Gris

Glazed  
Vitrified Tiles  
600x1200mm | Rustic Finish

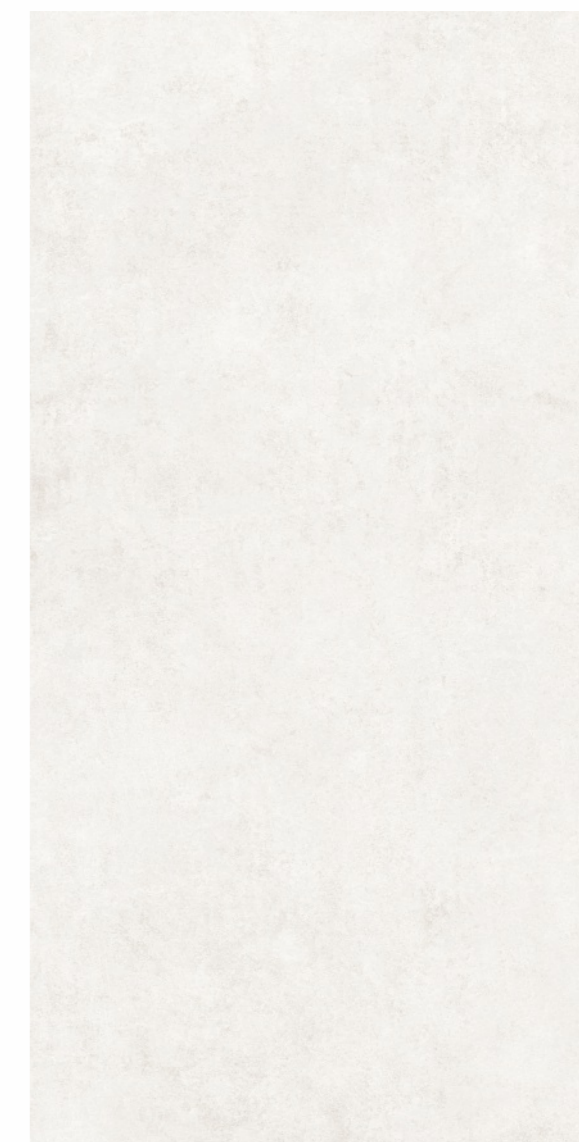

Attic Bianco

Glazed  
Vitrified Tiles  
600x1200mm | Rustic Finish

# TECHNICAL SPECIFICATION



# APPLICATION

Sr. No	Characteristics	Method of Testing	Vitrified Tiles ISO 13006 / EN 176 Group BIa	Values
<b>A</b>	<b>Dimension &amp; Surface Quality</b>			
1	Deviation in Length & Width	ISO 10545-2	+ / - 0.5%	+ / - 0.1%
2	Deviation in Thickness	ISO 10545-2	+ / - 5.0%	+ / - 2.0%
3	Straightness of Sides	ISO 10545-2	+ / - 0.5%	+ / - 0.1%
4	Rectangularity	ISO 10545-2	+ / - 0.5 %	+ / - 0.1%
5	Surface Flatness	ISO 10545-2	+ / - 0.5%	+ / - 0.2%
6	Color Differences	ISO 10545-16	Unaltered	No Change
7	Surface Coating	Nano Machine	As Per Manufacturer Norms	Nano Polished
<b>B</b>	<b>Physical Properties</b>			
1	Water Absorption	ISO 10545-3	< 0.5%	0.08%
2	Flexural Strength ( MOR )	ISO 10545-4	> 27 N / mm <sup>2</sup>	> 30 N / mm <sup>2</sup>
3	Mohs Hardness	EN 101	Min 6	6 Mohs
4	Flexural Breaking Strength	ISO 10545-4	> 1113 N	2350 N
5	Bulk Density ( Gm / cc )	DIN 51082	>2 gm/cc	2.35 gm/cc
6	Glossiness	Glossometer	As Per Manufacturer Norms	Min 85 % reflection
7	Slip Resistance Coefficient of Friction	ISO 10545-17	> 0.4	> 0.6
8	Crazing Resistance	ISO 10545-11	Min 4 Cycle @ 7.5 Bar	Passes 4 Cycle
9	Resistance Of Surface Abrasion	ISO 10545-6	As Per Manufacturer Norms	> PEI I V
<b>C</b>	<b>Chemical Properties</b>			
1	Staining Resistance	ISO 10545-14	Resistant	Resistant
2	Household Chemicals	ISO 10545-13	No Damage	No Damage
<b>D</b>	<b>Thermal Properties</b>			
1	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage
2	Thermal Expansion	ISO 10545-10	9 x 10 <sup>-6</sup> max	6 x 10 <sup>-6</sup>
3	Moisture Expansion	ISO 10545 - 10	Nil	Nil



# PACKING DETAILS

PRODUCT	SIZE	PCS/BOX	COVERAGE AREA	
<b>GLAZED VITRIFIED TILES</b>	<b>600x1200mm</b>	<b>2</b>	<b>1.44 SQ. MTR.</b>	<b>15.50 SQ. FT.</b>

Note : Color shown are as accurate as the limitation of the printing process will allow. Prospective customers are advice to inspect a sample of the tile before ordering. Every efforts has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

