



PRODUCTS



Stucchi®

DIRECTORY



a constant flow of solutions



A CONSTANT FLOW OF SOLUTIONS

Stucchi is a recognized global leader in the design and manufacturing of quick coupling products for hydraulic sector.

Stucchi products line is available in over 3500 different configurations offering options for different materials, surface treatments, threads, dimensions from 1/8" to 2", tested up to 1 million impulses and for pressures up to 70 mpa (700 bars) for a wide range of outdoor and indoor applications.

Stucchi, with more than 50 years of experience, thanks to significant investments and innovative capacities makes the companies of the group a reality that exceed in excellence of design and realization of product.

Stucchi solutions help saving time during operations and insure the good condition of the machinery in the long run.

MAIN APPLICATIONS



Agriculture



Oil & Gas



Industrial



High Pressure



Cooling



Refrigeration



Earth Moving




Transportation



Hydraulic tools



Chemical food industry

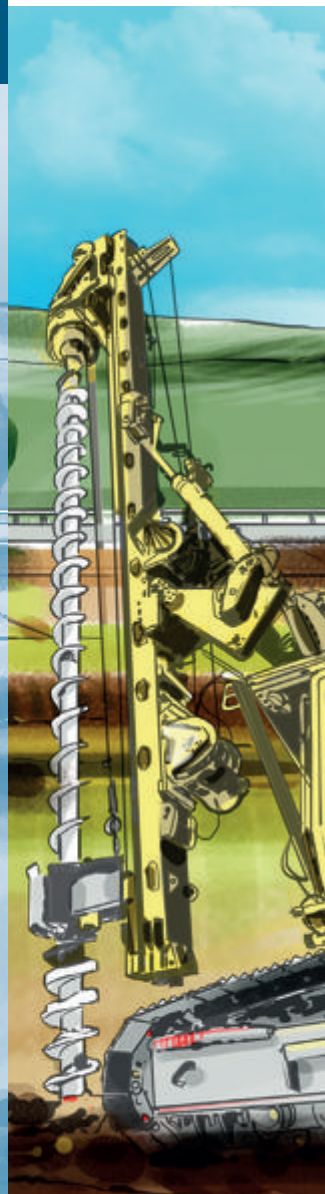

ISO16028

FIRG

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 - NFPA T3.20.15 - HTMA (size 3/8")**
 Available sizes: **From 1/4" to 2"**
 Operating pressure: **Up to 300 bar**
 Flow rate: **Up to 1000 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Push**
 Connection under pressure: **Not allowed**
 Typical use: **Outdoor**

A

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 - NFPA T3.20.15 - HTMA (size 3/8")**
 Available sizes: **From 1/8" to 1-1/2"**
 Configuration: **Modular construction**
 Operating pressure: **Up to 420 bar**
 Flow rate: **Up to 750 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Push**
 Connection under pressure: **Not allowed**
 Typical use: **Outdoor**

FIRG-Q

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 - NFPA T3.20.15 - HTMA (size 3/8")**
 Available sizes: **From 1/4" to 2"**
 Operating pressure: **Up to 300 bar**
 Flow rate: **Up to 1000 L/Min**
 Material: **Internal parts in stainless steel**
 Connection system: **Push**
 Connection under pressure: **Not allowed**
 Typical use: **Outdoor**

FL

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 - NFPA T3.20.15 - HTMA (size 3/8")**
 Available sizes: **From 1/8" to 2"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 1000 L/Min**
 Material: **Stainless steel (AISI 316)**
 Connection system: **Push**
 Connection under pressure: **Not allowed**
 Typical use: **Indoor & Outdoor**

AX

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 - NFPA T3.20.15 - HTMA (size 3/8")**
 Available sizes: **From 1/4" to 1"**
 Configuration: **Modular construction**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 378 L/Min**
 Material: **Stainless steel (AISI 316)**
 Connection system: **Push**
 Connection under pressure: **Not allowed**
 Typical use: **Indoor & Outdoor**

APM

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 - NFPA T3.20.15 - HTMA (size 3/8")**
 Available sizes: **From 3/8" to 1-1/2"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 750 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Push**
 Connection under pressure: **Male side, other side to drain**
 Typical use: **Outdoor**

A-HD

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 - NFPA T3.20.15 - HTMA (size 3/8")**
 Available sizes: **From 3/8" to 1/2"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 90 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Push**
 Connection under pressure: **Female side, other side to drain**
 Typical use: **Outdoor**

SATURN

SERIES



Valving style: **Flat face**
 Interchange: **ISO 16028 (for the couplings)**
 Available sizes: **From 1/2" to 3/4"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 200 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Push**
 Connection under pressure: **One side+disconnection allowed**
 Typical use: **Outdoor**

STUCCHI SOLUTIONS

VEP-P

SERIES



Valving style: **Flat face**
 Interchange: **Stucchi profile**
 Available sizes: **From 1/4" to 2"**
 Operating pressure: **Up to 600 bar**
 Flow rate: **Up to 1000 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **Both side, easy connection + disconnection allowed**
 Typical use: **Outdoor**

VEP-HD

SERIES



Valving style: **Flat face**
 Interchange: **Stucchi profile**
 Available sizes: **From 3/4" to 1-1/2"**
 Operating pressure: **Up to 500 bar**
 Flow rate: **Up to 750 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **Both side, easy connection + disconnection allowed**
 Typical use: **Outdoor (Heavy duty)**

VP-P

SERIES



Valving style: **Flat face**
 Interchange: **Stucchi profile**
 Available sizes: **From 1/4" to 1-1/2"**
 Operating pressure: **Up to 600 bar**
 Flow rate: **Up to 750 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **Both side, easy connection + disconnection allowed**
 Typical use: **Outdoor**

HIGH PRESSURE

A-HP

SERIES



Valving style: **Flat face**
 Interchange: **Stucchi profile**
 Available sizes: **From 1/8" to 3/8"**
 Operating pressure: **Up to 720 bar**
 Flow rate: **Up to 46 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Push**
 Connection under pressure: **Not allowed**
 Typical use: **Outdoor**

MULTICOUPLINGS

DP

SERIES



Valving style: **Flat face**
 Interchange: **Stucchi profile**
 Available sizes: **From 3/8" to 3/4"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 378 L/Min**
 Material: **Aluminium & high strength carbon steel**
 Connection system: **Lever**
 Connection under pressure: **Both side, easy connection**
 Typical use: **Outdoor**

GR

SERIES



Valving style: **Flat face**
 Interchange: **Stucchi profile**
 Available sizes: **From 3/8" to 1"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 378 L/Min**
 Material: **Brass & high strength carbon steel**
 Connection system: **Lever**
 Connection under pressure: **Both side, easy connection**
 Typical use: **Outdoor**

GRE

SERIES



Valving style: **Flat face**
 Interchange: **Stucchi profile**
 Available sizes: **From 3/8" to 1/2"**
 Operating pressure: **Up to 10 bar**
 Flow rate: **Up to 90 L/Min**
 Material: **Aluminium & brass**
 Connection system: **Lever**
 Typical use: **Indoor**

IV-HP

SERIES



Valving style: **Ball**
 Interchange: **Similar Couplings (High Pressure)**
 Available sizes: **From 1/4" to 3/8"**
 Operating pressure: **Up to 700 bar**
 Flow rate: **Up to 23 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **Not allowed**
 Typical use: **Outdoor**

ISO B

IRB SERIES



Valving style: **Poppet**
 Interchange: **ISO 7241-1 B**
 Available sizes: **From 1/8" to 1"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 200 L/Min**
 Material: **High strength carbon steel**
 Connection system:
Single acting sleeve
 Connection under pressure:
Not allowed
 Typical use: **Indoor & Outdoor**

IRBX SERIES



Valving style: **Poppet**
 Interchange: **ISO 7241-1 B**
 Available sizes: **From 1/8" to 1"**
 Operating pressure: **Up to 250 bar**
 Flow rate: **Up to 200 L/Min**
 Material: **Stainless steel**
 Connection system:
Single acting sleeve
 Connection under pressure:
Not allowed
 Typical use: **Indoor & Outdoor**

IRBO SERIES



Valving style: **Poppet**
 Interchange: **ISO 7241-1 B**
 Available sizes: **From 1/8" to 1"**
 Operating pressure: **Up to 200 bar**
 Flow rate: **Up to 200 L/Min**
 Material: **Brass**
 Connection system:
Single acting sleeve
 Connection under pressure:
Not allowed
 Typical use: **Indoor**

CHECK VALVES

VUZ SERIES



Valving style: **Check valves**
 Available sizes: **From 1/8" to 2"**
 Standard cracking pressure:
Up to 4,5 bar
 Flow rate: **Up to 1000 L/Min**
 Material: **High strength carbon steel**
 Typical use: **Outdoor**

ISO A

BIR SERIES



Valving style: **Poppet**
 Interchange: **ISO 7241-1 A**
 Available sizes: **From 1/4" to 2"**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 1000 L/Min**
 Material: **High strength carbon steel**
 Connection system:
Single acting sleeve
 Connection under pressure:
One side with PC version
 Typical use: **Outdoor**

I/IP SERIES



Valving style: **Poppet (Breakaway system)**
 Interchange: **ISO 7241-1 A**
 Available sizes: **From 1/4" to 1"**
 Configuration: **Modular construction**
 Operating pressure: **Up to 350 bar**
 Flow rate: **Up to 200 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Push-pull**
 Connection under pressure:
Not allowed
 Typical use: **Outdoor**

IR/IR-V SERIES



Valving style: **Ball/Poppet**
 Interchange: **Similar couplings + IR V + ISO 7241-1 "A" size 1/2" only**
 Available sizes: **From 1/4" to 1"**
 Operating pressure: **Up to 300 bar**
 Flow rate: **Up to 200 L/Min**
 Material: **High strength carbon steel**
 Connection system:
Single active sleeve
 Connection under pressure:
Not allowed
 Typical use: **Outdoor**

SAE J639

ACR-ACB SERIES



Valving style: **Poppet**
 Interchange: **SAE J639**
 Available sizes: **1/4"**
 Operating pressure: **Up to 10 bar**
 Material: **Brass**
 Connection system: **Push - screw**
 Connection under pressure:
Not allowed
 Typical use: **Indoor**

OTHER INTERCHANGES

VD

SERIES



Valving style: **Poppet**
 Interchange: **ISO14541**
 Available sizes: **From 1/4" to 1-1/4"**
 Operating pressure: **Up to 450 bar**
 Flow rate: **Up to 378 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **One side**
 Typical use: **Outdoor**

VLS

SERIES



Valving style: **Poppet**
 Interchange: **Similar Couplings**
 Available sizes: **From 1/2" to 1"**
 Operating pressure: **Up to 465 bar**
 Flow rate: **Up to 200 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **One side**
 Typical use: **Outdoor**

VR

SERIES



Valving style: **Flat face limited spill**
 Interchange: **Similar Couplings (Rohrleitung)**
 Available sizes: **From 3/8" to 1-1/4"**
 Operating pressure: **Up to 420 bar**
 Flow rate: **Up to 576 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **One side**
 Typical use: **Outdoor**

VOF

SERIES



Valving style: **Poppet**
 Interchange: **Similar Couplings (Oil & Gas)**
 Available sizes: **From 3/4" to 2"**
 Operating pressure: **Up to 345 bar**
 Flow rate: **Up to 1100 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Screw**
 Connection under pressure: **One side**
 Typical use: **Outdoor**

IRC

SERIES



Valving style: **Poppet**
 Interchange: **similar couplings (Nordic interface)**
 Available sizes: **From 1/4" to 1"**
 Operating pressure: **Up to 600 bar**
 Flow rate: **Up to 378 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Single acting sleeve**
 Connection under pressure: **One side with PC version**
 Typical use: **Outdoor**

IFR

SERIES



Valving style: **Flat face**
 Interchange: **ISO 5676**
 Available sizes: **3/8"**
 Operating pressure: **Up to 150 bar**
 Flow rate: **Up to 23 L/Min**
 Material: **High strength carbon steel**
 Connection system: **Single acting sleeve**
 Connection under pressure: **Not allowed**
 Typical use: **Outdoor**



Easy connection is the Stucchi solution for manual connection with residual pressure in the circuit. The male couplings have a triple valve system: double internal pressure release valve and a flat face valve. This system easily allows connection of couplings with internal high residual pressure in safe condition and without fluid loss.



Specific dimensions of Stucchi VEP-P, VP-P and VOF series are fire tested and Lloyd certified in accordance with API 16D and the EUB Directive #36. For complete technical information please contact Stucchi technical support.

! WARNING

A defect, a wrong choice or an improper use of products, can cause injury to persons, animals and objects. It is **MANDATORY** to read and closely follow the instructions written on www.stucchi.it before selecting or using Stucchi products.

Connection under pressure are under residual pressure.

Never connect or disconnect with dynamic pressure (e.g. pump on).

For full specifications see specific data sheet on www.stucchi.it

Stucchi S.p.A.*Headquarter*

Via delle Arti e dei Mestieri, 17
24040 Pagazzano (BG) Italy

Registered Office

Via Galileo Galilei, 1
24053 Brignano Gera d'Adda (BG) Italy
stucchi.it

**Stucchi®****Stucchi USA inc.**

1107 Windham Parkway,
Romeoville
IL 60446 USA
stucchiusa.com

Stucchi (Shanghai)

Fluid Power Technology Co., Ltd
No. 5, Lane 2500, Xiupu Road
Kangqiao Industrial Park
Pudong New District
201203 Pudong Shanghai, China
stucchichina.com

Stucchi FCP Pty Ltd.

8 / 7-11 Rodeo Drive
Dandenong South
VIC 3175 Australia
stucchiaustralia.com

