


DOUBLE FLANGE TYPE S46

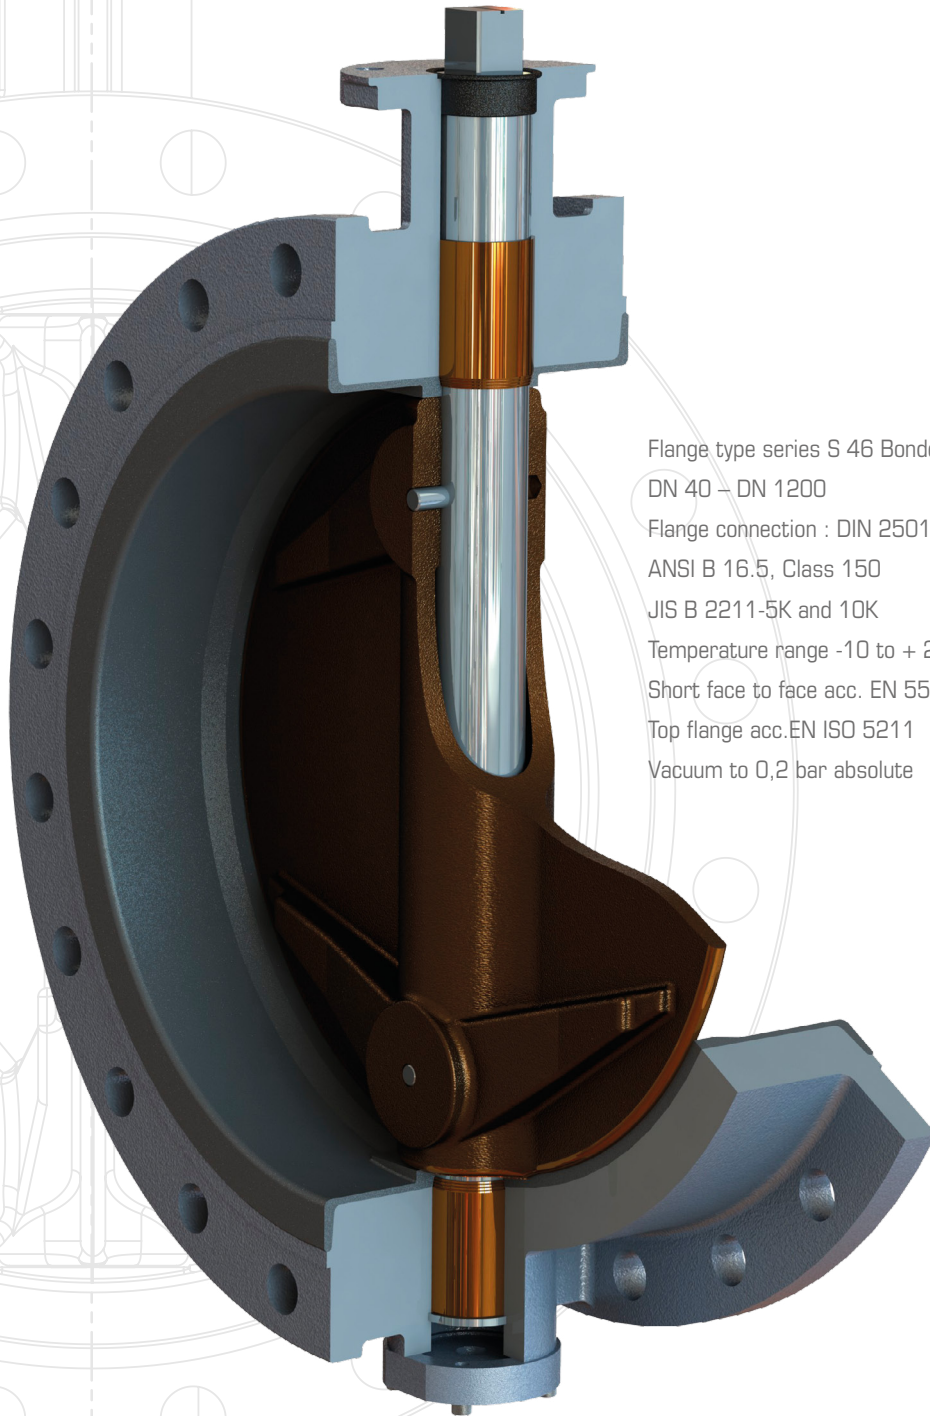

Flange type series S 46 Bonded liner

DN 40 – DN 1200

Flange connection : DIN 2501 PN 6-10-16 (PN25 up to DN 400)

ANSI B 16.5, Class 150

JIS B 2211-5K and 10K


Temperature range -10 to + 200 degrees C

Short face to face acc. EN 558.1 row 13

Top flange acc. EN ISO 5211

Vacuum to 0,2 bar absolute

CONCENTRIC-, DOUBLE FLANGE TYPE BUTTERFLY VALVES

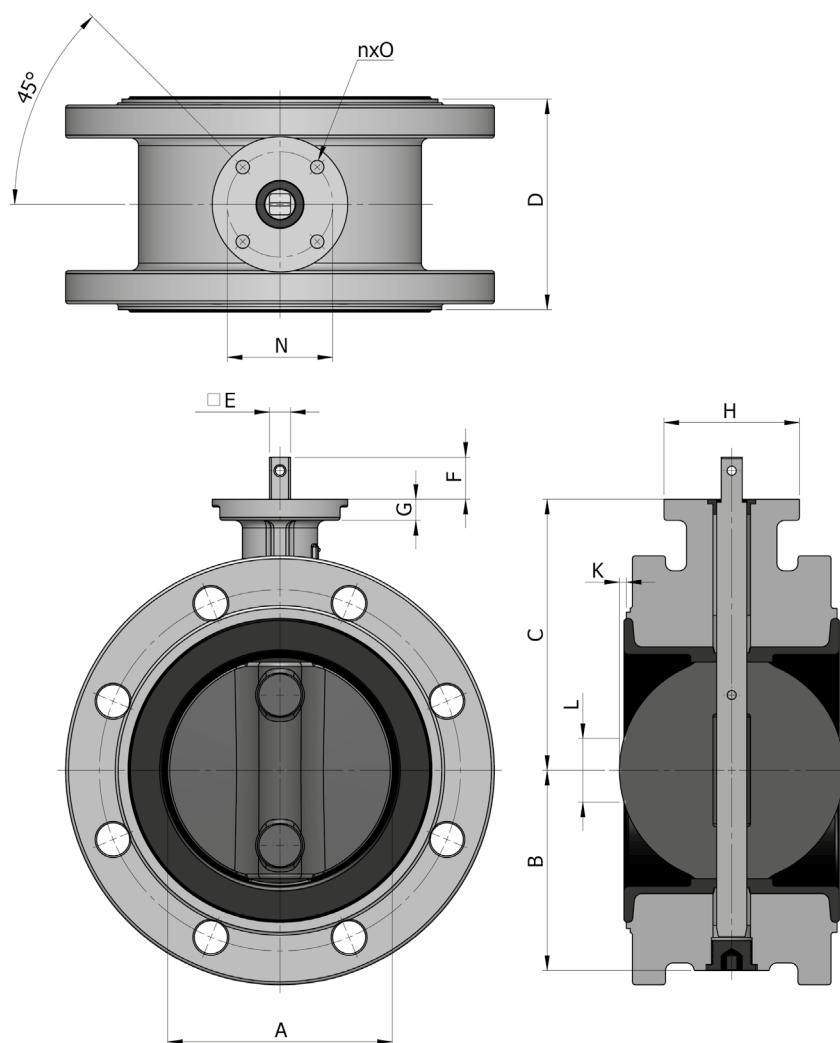

DOUBLE FLANGE TYPE S46

DN	NPS	øA	E	F	B	C	øH	D	N (PCD) (ISO 5211)	n x Ø	G	L	K	Weight +/- kg
40	1½"	40	11	25	61	113	90	106	ø70 (F07)	4 x ø9	12	NA	NA	7,5 kg
50	2"	52	11	25	67	118	90	108	ø70 (F07)	4 x ø9	12	NA	NA	8 kg
65	2½"	68	11	25	74	126	90	112	ø70 (F07)	4 x ø9	12	NA	NA	8,8 kg
80	3"	82	11	25	82	133	90	114	ø70 (F07)	4 x ø9	14	NA	NA	10 kg
100	4"	104	11	25	99,5	147	90	127	ø70 (F07)	4 x ø9	14	NA	NA	13,1 kg
125	5"	127	14	28	111,5	160	90	140	ø70 (F07)	4 x ø9	14	NA	NA	18 kg
150	6"	151	14	28	134	180	90	140	ø70 (F07)	4 x ø9	14	56	5,4	23,1 kg
200	8"	201	17	28	172	204	90	152	ø70 (F07)	4 x ø9	14	132	25	43 kg
250	10"	252	22	30	203	245	125	165	ø102 (F10)	4 x ø11	15	190	43	52 kg
300	12"	304	22	30	223	270	125	178	ø102 (F10)	4 x ø11	15	246	63	77 kg