


FOAM MONITOR (WITH AQUA NOZZLE)

- BODY : CARBON STEEL WATER WAYS (HOT DIP GALVANIZED)
- SWIVEL JOINT : BRONZE (MANUAL TWIST LOCK) / SS 304
- INLET : FLANGED TO IS:1538 / ANSI B16.5 150 LBS
- OUTLET : MALE BSP THREADED / AQUA NOZZLE MADE OF ALUM. ALLOY
- ROTATION : HORIZONTAL 360° , VERTICAL +90° & -45°.
- TEST PRESSURE : 23 KG/CM²
- LOCKING DEVICE FOR HORIZONTAL AND VERTICAL POSITION

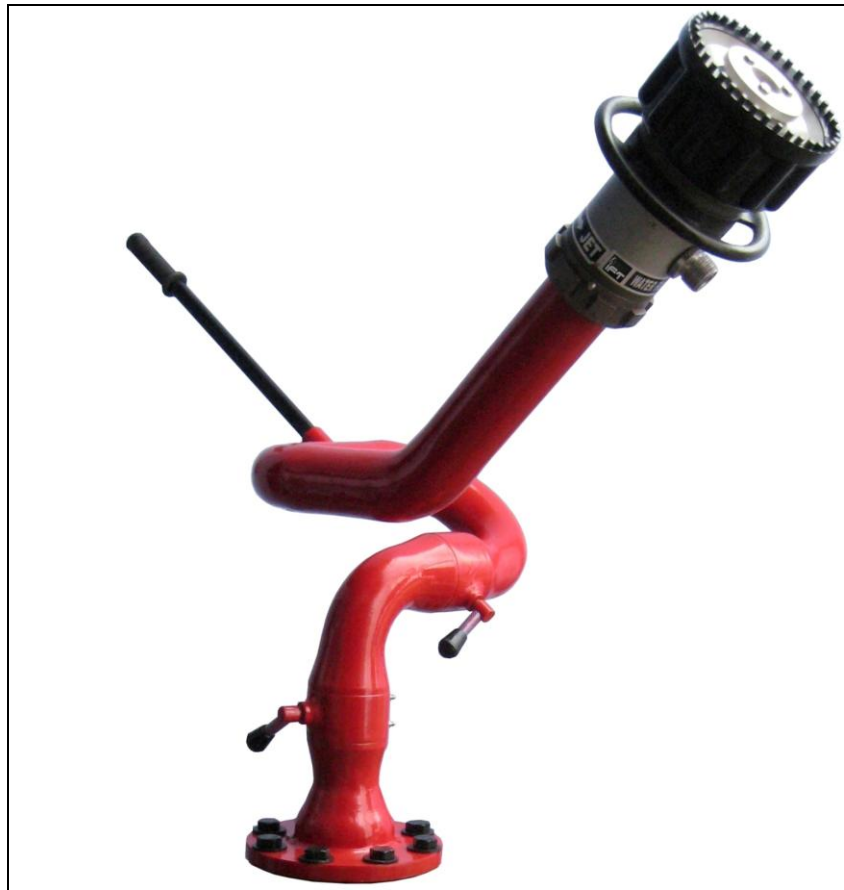

MODEL	OPERATING PRESSURE RANGE KG/CM ²	FLOW RANGE LPM	INLET FLANGE NB	BARREL SIZE	PERFORMANCE	
					FLOW LPM	RANGE MTRS.
M63	6 - 12	1500 - 2500	75/100	63	1750	33