


GLITUP


LED LIGHT SOLUTIONS

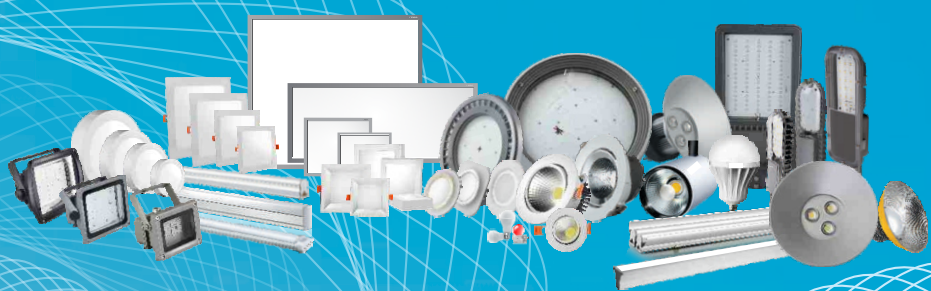

LED LIGHT
CATALOUGE

DESIGNER DOWN LIGHT

GLITUP
LED LIGHT SOLUTIONS

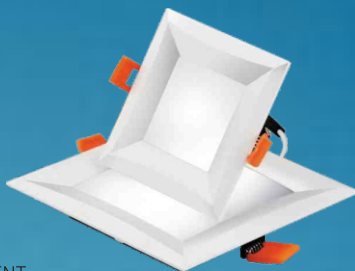

DESIGN PATENT

Product Code	DDL-6W	DDL-9W	DDL-12W	DDL-15W
Input Power	6W	9W	12W	15W
Input Voltage	110-300V AC 50Hz			
Power Factor	0.95			
Color Temperature	2700K -6500K			
CRI	More Than 85			
Beam Angle	170			
Lumens	600	900	1200	1500
Operating Temperature	{-20 To +60 Degree Centigrade}			
Size	4"	4"	6"	6"

applications: restaurants, hotels, cafes, museums, commercial and home decorative lighting places

COB SPOT LIGHT



Product Code	SPOTCOB-5W	SPOTCOB-10W	SPOTCOB-15W	SPOTCOB-30W
Input Power	5W	10W	15W	30W
Input Voltage	110-300V AC 50Hz			
Color Temperature	2700K TO 6500K			
CRI	More Than 80			
Beam Angle	24-36 Degree			
Lumens	450	900	1350	2700
Operating Temperature	{-20 To +50 Degree Centigrade}			
Size	83mm	107mm	135mm	155mm
Cut Out	ø70	ø 90	ø120	ø140

applications: restaurants, hotels, cafes, museums, commercial and home decorative lighting places

COB ZOOM LIGHT

GLITUP
LED LIGHT SOLUTIONS



Product Code	ZOOM COB-12W	ZOOM COB-20W	ZOOM COB-40W
Input Power	12W	20W	40W
Input Voltage	110-300V AC 50Hz		
Color Temperature	2700K TO 6500K		
CRI	More Than 80		
Beam Angle	120/60 Degree With Optical Lens		
Lumens	1100	1800	3750
Operating Temperature	{-20 To +50 Degree Centigrade}		
Cut Out	ø90	ø140	ø180

Features: Dimmable, 360 Degree rotatable & 80 degree upfront adjustment

COB TRACK LIGHT



Product Code	TRACKCOB10W	TRACKCOB20W	TRACKCOB30W	TRACKCOB40W
Input Power	10W	20W	30W	40W
Input Voltage	110-300V AC 50Hz			
Power Factor	0.95			
Color Temperature	2700K -6500K			
CRI	More Than 85			
Beam Angle	60/120 Degree With Optical Lens			
Lumens	900	1800	2700	3600
Operating Temperature	{-20 To +60 Degree Centigrade}			

Features: 240 Degree adjustable, Externally mounted, dimmable

CONCEALED LIGHT

GLITUP
LED LIGHT SOLUTIONS



Product Code	CON 3W	CON 5W	CON 7W	CON 9W
Input Power	3W	5W	7W	9W
Input Voltage	110-300V AC			
Power Factor	0.95			
Color Temperature	2700K-6500K			
CRI	More Than 85			
Beam Angle	170			
Lumens	300	500	700	900
Operating Temperature	{-20 To +50 Degree Centigrade}			
Size	3"			

Application: Best suited for installing LED light in old concealed fixtures like fan box

HOME DECOR INTEGRATED TUBES



Product Code	T5 9W1	T5 9W2	T5 18W4	T5 22W4	T5 24W4
Input Power	9W	9W	18W	22W	24W
Input Voltage	110-300V AC 50Hz				
Power Factor	0.9				
Color Temperature	2700K -6500K				
CRI	More Than 80				
Beam Angle	160° Degree				
Lumens	900	900	1800	2200	2400
Operating Temperature	{-20 To +60 Degree Centigrade}				
Size	1ft.	2 ft.	4 ft.		
Housing Material	Thermoplastic				
Shape	Mushroom /Square/Curve				

applications: restaurants hotels cafes museums commercial and home decorative lighting places
Install with ease

PANEL LIGHT

GLITUP
LED LIGHT SOLUTIONS



SURFACE



SLIM

Input Power	3W	6W	9W	12W	15W	20W	24W
Input Voltage	110-300V AC 50Hz						
Power Factor	0.95						
Color Temperature	2700K -6500K						
CRI	More Than 85						
Viewing Angle	170 Degree						
Lumens	300	600	900	1200	1500	2000	2350
Finish	Power Coated Color - White						
Housing	Die Casting Frame						
Size	3"	4"	6"	8"	12"		

Easy to Install on high ceiling, low ceiling, surface mounting

COMMERCIAL CEILING PANELS




Product Code	CPL-24W	CPL-40W	CPL-40W	CPL-48W
Input Power	24W	40W	40W	48W
Input Voltage	110-300V AC 50Hz			
Color Temperature	2700K -6500K			
CRI	More Than 85			
Viewing Angle	180 Degree			
Lumens	2160	3600	3600	4320
Operating Temperature	{ -20 To +50 Degree Centigrade }			
Size	1' X 2'	1' X 4'	2' X 2'	

Applications: Restaurants, Hotels, Cafes, Museums, Commercial
And Home Decorative Lighting Places

TUBES ALUMINUM SERIES

GLITUP
LED LIGHT SOLUTIONS



CURVE

SQUARE

RETROFIT

PL 2G11




best suited for Pharmaceutical clean room Fixtures

MOTION SENSOR LED TUBE

intelligentlighting

when nobody is moving in its range, it sleeps



Input Power	18W	22W	24W	28W
Input Voltage	110-300V AC 50Hz			
Power Factor	0.9			
Color Temperature	2700K -6500K			
CRI	More Than 80			
Installation	RETROFIT / INTEGRATED T5 & T8			
Lumens	1800	2200	2400	2800
Shape	CURVE/MUSHROOM/SQUARE			
Finish	Available In Powder Coated & Aluminum Finish			
Size	4ft			

Feature : Real Energy Saver, When No Body Is In It's Range It Turns Itself Off

MULTI LED HIBARY



Input Power	65W	90W	120W	150W	180W
Input Voltage	110-300V AC 50Hz				
Color Temperature	6000K				
CRI	More than 85				
Beam Angle	120*WITH REFLECTOR				
Lumens	7000	10000	13000	16000	18000
Operating Temperature	{-20 To +60 Degree Centigrade}				
Reflector	REFLECTOR AVAILABLE ON DEMAND				

FEEL DAY LIKE IN NIGHT

WIDELY USED IN SHEDS AND GODOWNS WITH HIGH ROOFS

OFFICE DESIGNER TUBES

GLITUP
LED LIGHT SOLUTIONS



Input Power	28W	36W	44W	48W
Input Voltage	110-300V AC 50Hz			
Power Factor	0.95			
Color Temperature	4000K -6500K			
CRI	More Than 85			
Beam Angle	170 Degree			
Lumens	2750	3490	4250	4750
Operating Temperature	{-20 To 60 Degree Centigrade}			
Size	4"			

APPLICATION: USED IN DESIGNER OFFICES ,CAN BE HANGED WITH SUSPENDING WIRES

Phase Dimming & Motion Sensor Available On Demand

FLOOD LIGHT



Product Code	FL10W	FL20W	FL30W	FL50W	FL80W	FL100W	FL120W	FL150W	FL180W
Input Power	10W	20W	30W	50W	80W	100W	120W	150W	180W
Input Voltage	110-300V AC 50Hz								
Power Factor	0.95								
Color Temperature	6500K								
CRI	More than 85								
Beam Angle	170 Degree With Optional Lens120*								
Lumens	1000	2000	3000	5000	8000	10000	12000	15000	18000
Operating Temperature	{-20 To +60 Degree Centigrade}								
LED Driver	Constant Current Isolated Driver								

NOTE : LENS / MOTION SENSOR / DUST TO DAWN / LDR / TIMER AVAILABLE ON DEMAND

Perfect Replacement Of High Mask Halogen Lights Saving 80% Energy

Best Suited For Illuminating Stadium, Parking, Construction Sites, Gardens & Glowing

Advertisement Posters

STREET LIGHT

GLITUP
LED LIGHT SOLUTIONS



Input Power	6W	9W	12W	24W	36W	48W	60W	80W	120W	150W
Input Voltage	110-300V AC 50Hz									
Power Factor	More than 0.90									
Color Temperature	3000K-6500K									
CRI	More than 75									
Housing	Pressure Die Casting									
Finish	Powder Coating									
Beam Angle	170 Degree With Optional Lens120*									
Lumens	600	900	1200	2400	3600	4800	6000	8000	12000	15000
Operating Temperature	{-20 To +60 Degree Centigrade}									

NOTE : LENS / MOTION SENSOR / DUST TO DAWN / LDR / TIMER AVAILABLE ON DEMAND

Application : Used for Street Lighting, Campus Lighting, Garden Lighting Purposes ,
Their optic lenses can give wider dispersion of light, covering maximum area

SOLAR STREET LIGHT

SMART LIGHTING

Inbuilt **Charge Controller** Which Intelligently Sense
The Current And Increases The Life Of Battery



Input Power	6W	9W	12W	24W	36W
Input Voltage	12V DC(BATTERY)				
Power Factore	More than 0.90				
CRI	2700K-6500K				
Color Temperature	More than 75				
Housing	Pressure Die Casting				
Finish	Powder Coating				
Beam Angle	170*/120* & 60* With Optional Lens				
Lumens	600	900	1200	2400	3600
Operating Temperature	{-20 To +60 Degree Centigrade}				

NOTE : LENS / MOTION SENSOR / TIMER AVAILABLE ON DEMAND

Application : Used for Street Lighting, Campus Lighting, Garden Lighting Purposes ,
in remote areas.

GLITUP

LED LIGHTING SOLUTIONS

Head Office : A506, Bren Avalon Karthik Nagar, Chinnapanahalli, Bengaluru, Karnataka-560037
Corporate Office : Yug Complex, Part - B, MIE Industrial Area, Bahadurgarh, Haryana-124507 (INDIA)
Manufacturing Unit : Naresh Park, Nangloi, New Delhi-110041

Contact : 9729661223, 9034639545

E-mail : Info@glitupled.co.in, glituplighting@gmail.com, **Website :** www.glitupled.co.in