





SOLENOID ACTUATED DIAPHRAGM PUMP

It is a Mini Dose displacement diaphragm metering pump operating at 230V 50Hz supply. It is base mountable. Solenoid pushes the diaphragm which in turn pushes the liquid to system. Solenoid is actuated by a solid state electronic circuit. It has two controls for the desired accuracy of the dosing.



SALIENT FEATURES

ELECTRONIC CIRCUIT

State of art electronic circuit (protectively coated with epoxy) is virtually unaffected by temp, EMI & other electric disturbances. Liquid Head & Housing: An all plastic housing is resistant to corrosive chemical agents, reliable operation.

SOLENOID

High quality hot rated solenoid is designed to dissipate heat. Capacities & pressure do not derate even over extended use.

DIAPHRAGM

Superior diaphragm is designed to ensure long life even under the most demanding application. Teflon faced, metal reinforced diaphragm ensures leak free operation.

TECHNICAL SPECIFICATIONS

1. Electrical 230v AC (+ or - 20%) 50 Hz

2. **Suction Tubing** 6 / 8 mm 6 / 8 mm **Discharge Tubing** 3.

Dosing Flow Rate 0-4 / 0-6 / 0-8 / 0-10 / 0-15 / 0-20 / LPH & 40 LPH Open Tank

: 10 / 8 / 4 / 3 / 3 Kg/Cm2

Dosing Pressure Stokes / Minutes 6. Max 135, Min: 15

7. Fuse 600m Amp. Stoke Controller 8. 0 - 100% 9. Pulse Controller 0-10%

10. Pump Head P.P. / PVDF / CFT / LDPE

11. Diaphragm MOC P.T.F.E.

12. Connectors P.P. / PVDF / CFT / LDPE

13. NRB Ball Ceramic

14. Suction Tubing's : P.P. / PVDF / CFT / LDPE

15. Environment Temperature: 50° C Max 16. Power Consumption : 50 Watt










FEATURES

- Simplicity of design, easy for maintenance.
- Steady flow without plusations,
- minimum turbulance
- Temperature range : 500C to 1500C
- Maximum delivery pressure : 30 kg/cm2
- Maximum permissible solid content upto 50%

Materials of Construction being Offered:

 Rotor: Ss304 / SS304L, Ss316 / SS316L, Carbon Steels, Alloy20, Hastelloys, Any other special alloy

• Stator: Nitrile rubber, Viton, EPDM, Neoprene Hyplon

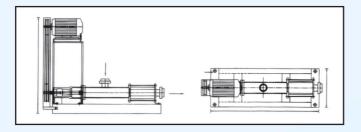







Applications:

as Pharmaceuticals







Paper Industries


Water, Waste Water Sewage

Chemicals & Fertilizers

Food & Beverages

KEY DESIGN FEATURES:


- MINIDOSE make HD type Diaphragm glandless pump, with allow leak tree operation, Flow rates of 0 to 10,000 LPH & High discharge pressures of 180.
- Kg/Sq cm can be achieved. Stady state metering accuracy of +- 1% of pump output, at single setting of stroke from 10% - 100%
- Reproducibility (Repeatability) better than +/- 1.5% of set point inbuilt pressure Relief & Vaccum valve on the hydraulic side to safeguard system.
- Double diaphragm with rupture indication also available, Easily handles viscous fluids.
 They are compatible with most of fluids.
- Simplex and Multiplex arrangements of pump available for universal use. Heating or cooling jackets for liquid head is also available.

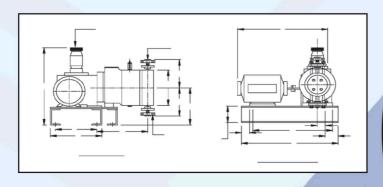





AN ISO 9001: 2015 CERTIFIED COMPANY





SELECTION CHART

				SELI	ECTION	CHAP	\ 		
	PUMP SPEED 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM		MODEL	Plunger	Max. Pr.	PUMP SPEED 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			
	Cap. LPH	Suc. Del. mmNB/BSP	Motor (HP/KW)	MO	Dia. mm	Kg/cm2	Cap. LPH	Suc. Del. mmNB/BSP	Motor (HP/KW)
	1.5	15			6	80	2.8	8	
	2.8	15			8	80	5	8	
4	4.2	15			10	80	7.8	8	
	6	15			12	80	11.3	8	
	8	15			14	80	15	8	
	11	15			16	80	20	15	
	14	15			18	70	25.4	15	
	17	15			20	60	31	15	
	21	15			22	58	38	15	/ _ 1
	24	15			24	42	45	15	
	29	15	0.5/0.37	-2	26	35	53	15	0.5/0.37
q	33	15	0.5/0.57	MD	28	31	61	15	0.5/0.57
- 1	38	15			30	27	71	15	
	43	15			32	24	80	15	
	49	15			34	20	91	15	
	55	15			36	18	102	15	
	61	15			38	16	113	15	
	68	15			-	40	15	125	15
	75	15			42	10	138	15	
'n	82	15			44	8	152	15	
	90	15			46	7	166	15	
10	98	15		1	48	6	200	15	

MATERIAL OF CONSTRUCTION

	1	Plunger	EN 8
I	2	Liquid End	SS 304, 316, 316 L, HASTEALLOY
	3	NRV	SS 304, 316, 316 L, HASTEALLOY

FEATURES

- Differrent Flow Rates can be achieved in a single model with stroke adjustment feature.
- The design & Performance of Hyd Series Pumps conforms to API 675.

PUMP DIMENSION IN MM

Г	Н	h	W	Α	В	С	D	d	
310	285	70	105	165	88	117	65	16	

With nearly 2 decades of experience, Our Dosing Pumps has emerged as a trusted manufacturer, exporter and supplier of impeccable quality range of Chemical Dosing Pumps. We are the first manufacturer of Dosing Pumps in Delhi. All of the major products manufactured by the company include Electronic Dosing Pumps, Plunger Pumps, Screw Pumps, and several more. These pumps are manufactured using high grade stainless steel, mild steel, brass and copper sourced from reliable vendors in the market. Our company is based in Delhi, which is a large hub of hardware and plumbing materials.









MIXTURE SYSTEM

CAPACITY CHART

MODEL	Max Capacity LPH	Max Pressure Kg/Cm ²	Suction Discharge Tubing		
MED - 5	6 8	4 3	LDPE Tubing 6/8"		
MD -6 / MD-10	2 4 6 8 10	8 6 4 3 1	LDPE Tubing 6/8"		
MED 20	6 15 18 20 25	8 6 4 3 2	LDPE Tubing 6/8"		
MD 30	5 15 20 25 30 40	8 6 3 2 1 0	LDPE Tubing 6/8"		

^{*} Accessories : NRV, FOOT VALVE / Y-STAINER, TUBING, PRV, OIL will be proved as per model. Specification are subject to change without prior notice due to continues product development programs.





INJECTARE



FOOT VALVE



Electronic Dosing Pump Accessories

- 1. Suction & Discharge Tubing of LDPE 6/8 4/6
- 2. Tubing 3.5 Mtrs. in Length.
- 3. Strainer Cum Injectare Foot Valve.
- 4. Test Certificate.
- 5. Warranty Card.

APPLICATIONS





Refinery &



Chemicals & **Fertilizers**



Environment Protection



Pharmaceuticals



Water, Waste Water Sewage



Oil & Gas



Food & Beverages







Textile



Mineral Ore Processing





Sugar Industries



Paint & Emulsion



Oil Industries

OUR CLIENTS













OTHER PRODUCTS



Model: MD 30 Capacity: 0 to 40 LPH



Model : MED 5 Capacity : 0 to 10 LPH



Model : MD-27 Capacity : 0 to 27 LPH Pressure : 10 Kg / Cm2



Model : MED-20 Capacity : 0 to 30 LPH Pressure : 3.5 Kg. Cm2



Model : MD-1 Capacity : 0 to 50 LPH Pressure : 5 Kg.



Screw Pump with Stand



Model: MD-6 & MD-10 Capacity: 0 to 10 LPH Pressure: 3.5 Kg. Cm2



Model : Diapharam Pump Capacity : 0 to 100 LPH

Pressure: 5 Kg.



Model: Plunger Pump Capacity: 0 to 100 LPH

Pressure: 5 Kg.



Deliver Quality Products:

The total operation based on certified quality systems and test procedure is based on the global industry standard API 675 & hydraulic institute standard requirement assures guaranteed performance for design safety. We have all materials traceability records. We deliver all orders with necessary documents (Test Certificate and Warranty Card).

Application Sectors:

- Brewing Effluents Treatment Distillation Water Treatment Swimming Pools Water Chlorination Food Processing Chemical Effluent Petro-Chemical Sewage Treatment
- Pulp & Paper Sugar Industries Pharmaceutical Plant Beverages Metal & Steel Plant Paint



MINI DOSE SOLUTION PUMPS

AN ISO 9001: 2015 CERTIFIED COMPANY _

Unit 1: BAWANA: I-188, Sector-5, DSIIDC Industrial Area Bawana, New Delhi-110039

Unit 2 : SULTAN PURI : B-31, 1st Floor, DSIIDC Industrial Complex
Near Bus Terminal Police Station Road, Sultanpuri, Delhi-110086
Office : +91 - 9136637070, 9911565551 / 52, 011-46535656
E-mail : minidosesolutionpumps@gmail.com / akvminidose@gmail.com

Web: minidosesolutionpumps.com / minidosesolutionpumps.in