

Online Dissolved Ozone Analyzer MS OZ 11

Online Dissolved Ozone Meter is used for continuous monitoring and controlling of ozone value in water treatment plants, canning plants, drinking water distribution networks, swimming pools, cooling and circulating water, water treatment projects, etc.




FEATURE

- Adopting non-membrane constant voltage sensor, no need to replace membrane and electrolyte
- High intelligence: Adopting high-precision AD conversion and single-chip micro-processing technology
- Time display: Built-in clock chip can display the current time
- Data storage : built-in storage chip which could save historical data for 1 year
- 1 channel 4~20mA current output
- Supports RS485 communication
- 2 groups of ON/OFF relay control
- Supports IoT system integration
- Watchdog function

TECHNICAL SPECIFICATION


Ozone Range	: 0 - 20.00 mg/L (ppm)
Temperature Range	: 0~90°C.
Resolution	: 0.01 mg/L, 0.1°C
Display	: 3.5-inch HD IPS colour LCD screen, resolution 480*320
Accuracy	: better than $\pm 1\%$ or ± 0.01 mg/L, $\pm 0.5^\circ\text{C}$
Temperature Comp.	: Manual / automatic, temperature compensation (0~60°C)
Data Storage	: one year of data (saved every minute)
Set Points	: 02 Nos (High & Low)
Control Output	: 02 Nos Potential free Relay (3A, 220VAC / 24VDC)
Output 1	: 4 to 20 mA DC isolated
Output 2	: RS 485 MODBUS
Environment Condition	: -20~60°C, relative humidity $\leq 85\%$
Supply Voltage	: 220 VAC $\pm 10\%$, 50/60Hz
Mounting	: Panel Mounted
Dimensions	: 98(L) \times 98 (W) \times 110(H)mm
Weight	: 0.8Kg
Protection	: IP 65

DIMENSIONS

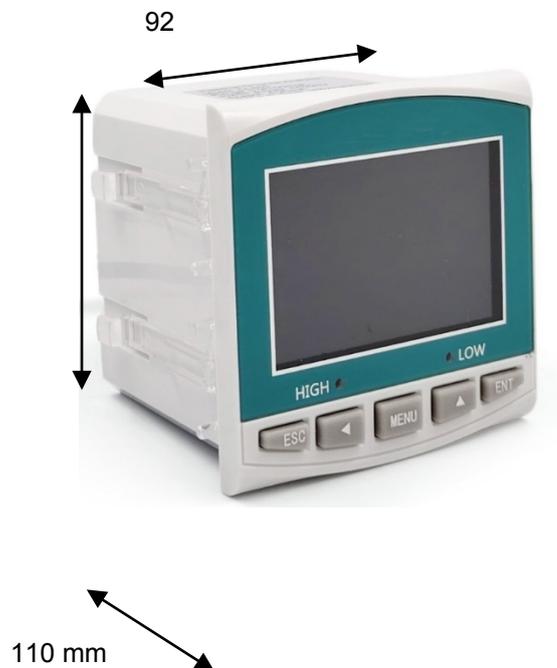

92

PANEL CUTOUT DIMENSION

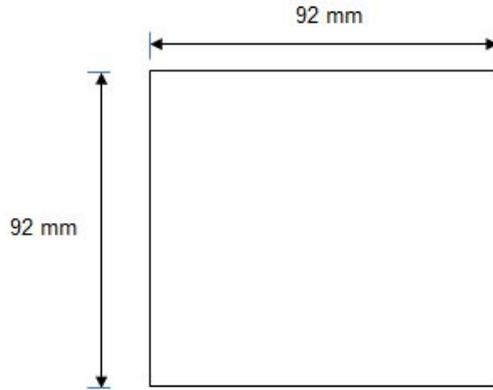

TERMINAL DETAILS



Note : Due to continuous improvement in product, specification and looks may vary.

 102 Chinmay 1103A 10 Lakaki Road Model Colony Shivajinagar Pune Maharashtra 411016 INDIA  +91 (0) 99222 00377 | +91 (0) 98500 41801
 info@MicroSetindia.com | sales@MicroSet.co.in  www.MicroSetindia.com | www.MicroSet.co.in