




Nandini Entrepreneur Equipments Private Limited
[**\(www.nandinientrepreneur.com\)**](http://www.nandinientrepreneur.com)

About Us



Established in the year 2015, at Faridabad in Haryana, India. We NANDINI ENTREPRENEUR EQUIPMENTS PVT LTD. have become a pioneer supplier, manufacturer and exporter of threading machines, grooving machine that come in various models with different pipe capacity .

All the machines offered by us are manufactured under the supervision of engineers who design, sizes, shapes and patterns as per the varied requirements of the clients. Moreover, these can also be availed by clients from us in various customized options and at industry leading prices. **We offer various range like Electric Pipe Threading Machine, Pipe Grooving Machine, Bolt & Pipe Threading Machine, Pipe Cutting Machine, Pipe Bending Machine, Electric Pressure Testing Pump, Thread Cutting Oil, etc.** Our Faridabad (Haryana, India), based company owns a voluminous production base. In this facility, work pertaining to product-designing takes place with complete perfection.

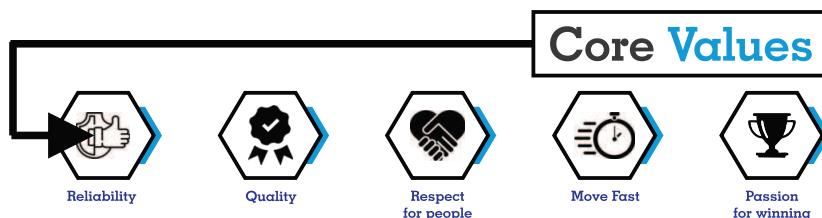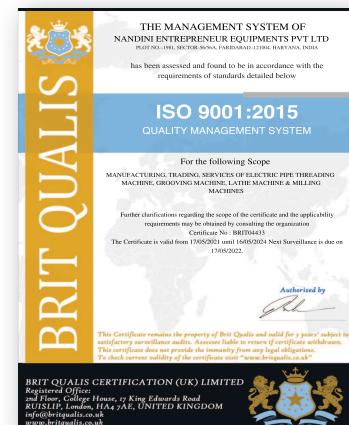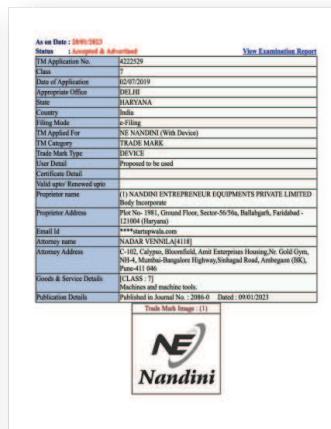

Our Products

MANUAL RATCHET PIPE THREADER

NE25M

Product Features

- Portable and Easy threading in small confines.
- Design of lead chamfer on dies gives easier thread starting.
- Size 1/2", 3/4", 1"
- Available BSPT/NPT Dies.
- Spare: 1/2", 3/4", 1"
- Die head & Dies interchangeable with most leading brands
- All supplied in a robust carry case



NE50M



Product Specification

Manual Hand Pipe Threader

Dies (BSPT/NPT)	1/2", 3/4", 1", 1 1/4", 1 1/2" & 2"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Weight	25Kg.
Ratchet Lever	Convenient, Lockable Reversal of Ratchet Direction

ELECTRIC PORTABLE PIPE THREADER

NEPT32



Product Specification

Electric Hand Pipe Threader

Dies (BSPT/NPT)	1/2", 3/4", 1", 1 1/4"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	1350W Universal Type
Power Supply	110V/220V, 50/60Hz.
Speed	28 RPM for Threading 51 RPM Reverse
Weight	15 Kg.

Product Specification

Electric Hand Pipe Threader

Dies (BSPT/NPT)	1/2", 3/4", 1", 1 1/4", 1 1/2" & 2"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	1350W Universal Type
Power Supply	110V/220V, 50/60Hz.
Speed	28 RPM for Threading 51 RPM Reverse
Weight	22 Kg.

NEPT50



Our Products

ELECTRIC PIPE THREADING MACHINE

NE-T2-50

Product Specification

Machine Size	1/2" to 2" (15 mm to 50 mm)
Dies (BSPT/NPT)	1/2" to 3/4" & 1" to 2"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	750w / 900w (Single Phase)
Power Supply	220V/380V
Speed	28 RPM
Weight	77Kg./70Kg.
Packing Size	710 x 455 x 520 mm



NE-T2-50A



Product Specification

Machine Size	1/2" to 2" (15 mm to 50 mm)
Dies (BSPT/NPT)	1/2" to 3/4" & 1" to 2"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	750w (Single Phase)
Power Supply	220V/380V
Speed	28 RPM
Weight	74Kg./60Kg.
Packing Size	760 x 470 x 550 mm
Machine Body	Aluminum Housing

NE-C2-50A

Product Specification

Machine Size	1/2" to 2" (15 mm to 50 mm)
Dies (BSPT/NPT)	1/2" to 3/4" & 1" to 2"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	750w / 900W (Single Phase)
Power Supply	220V/380V
Speed	28 RPM
Weight	86Kg./75Kg.
Packing Size	700 x 450 x 540 mm



Our Products

ELECTRIC PIPE THREADING MACHINE

NE-T2-50RT

Capacity

- Pipe: $\frac{1}{4}$ "-2"(8mm-50mm)

Features

- Heavy-duty proven performance.
- Lightweight, portable design.
- Fast transport and set-up.
- Self-Contained Oil System with adjustable flow control.

Technical Specifications

- Motor:** 1500W universal, 50/60Hz
- Switch:** ON/OFF heavy duty switch, foot switch Optional
- Spindle Speed:** 38 RPM.
- Front Chuck:** Hammer type with replaceable rocker action jaw inserts.
- Rear Centering Device:** Cam action.
- Oiling System:** Through die head, automatic circulation
- Pump:** Self-priming adjustable flow, rotor pump.

Standard Equipments

- Model NE-T2-50RT** threading machine.
- Self-opening die head.
- $\frac{1}{2}$ "- $\frac{3}{4}$ " universal HS dies set.
- 1"-2" universal HS dies set.
- Cutter: Capacity: $\frac{1}{8}$ "-2"(3mm-50mm) pipe
- Reamer: Positive-locking, 5-flute cone, right-hand $\frac{1}{8}$ "-2"(3mm-50mm)


Accessories

- Die head, Self-open
- Reamer, Cutter
- Foot Pedal Switch (optional)
- Nipple Chuck (optional)
- HS Dies 1/2" to 3/4", 1" to 2"
- Machine stand & Tool Kit

GERMAN TECHNOLOGY



Rigid Type



Standard Dies
(HS Standard)



NE-50 RT Die Head
(Standard)



Reinforced Cutting
Wheel

Our Products

ELECTRIC PIPE THREADING MACHINE

NE-T4-100RT

Capacity

- Pipe: $\frac{1}{4}$ "-4"(8mm-100mm)

GERMAN TECHNOLOGY

Features

- Heavy-duty proven performance.
- Threads $\frac{1}{4}$ "- $\frac{3}{4}$ " pipe at 36RPM, 1"-2" at 20RPM, 2 $\frac{1}{2}$ "-4" at 11RPM.
- An induction motor insures sound levels well when using.
- Self-Contained Oil System with adjustable flow control.
- A special capacitor-start / capacitor run motor allows the machine to thread where voltage drop is experienced.
- $\frac{1}{4}$ "-2" universal Die Head; 2 $\frac{1}{2}$ "-4" receding die head allows cutting of tapered or straight NPT/NPSM or BSPT/BSPP threads.
- Fast transport and set-up.

Technical Specifications

- Motor:** 1500W induction, 50/60Hz, single phase
- Switch:** ON/OFF heavy duty switch, foot switch and FOR/OFF/REV switch is optional
- Spindle Speed:** 36/20/11 RPM.
- Front Chuck:** Hammer type with replaceable rocker action jaw inserts.
- Rear Centering Device:** Cam action.
- Oiling System:** Through die head, with intergral oil reservoir.
- Oil Pump:** Self-priming constant flow

Standard Equipments

- Model NE-T4-100RT** threading machine.
- Self-opening die head, $\frac{1}{4}$ "-2"
- Receding self-opening die head, 2 $\frac{1}{2}$ "-4"
- $\frac{1}{2}$ "- $\frac{3}{4}$ " universal HS dies set.
- 1"-2" universal HS dies set
- 2 $\frac{1}{2}$ "-4" universal HS dies set
- Cutter: Capacity: $\frac{1}{8}$ "-4"(3mm-100mm) pipe
- Reamer: Positive-locking, right-hand $\frac{1}{8}$ "-4"(3mm-100mm).



Rigid Type



Reinforced Cutting Wheel



Standard Dies (HS Standard)



Die Head Size $\frac{1}{2}$ "-2" (Standard)

Die Head Size $2\frac{1}{2}$ "-4" (Standard)

Accessories

- Die head, Self-open
- Reamer, Cutter
- Foot Pedal Switch (optional)
- Nipple Chuck (optional)
- HS Dies $\frac{1}{2}$ " to $\frac{3}{4}$ ", 1" to 2", 2 $\frac{1}{2}$ to 4"
- Machine stand & Tool Kit

Our Products

ELECTRIC PIPE THREADING MACHINE

NE-T3-80

Product Specification

Machine Size	1/2" to 3" (15 mm to 80 mm)
Dies (BSPT/NPT)	1/2" to 3/4", 1" to 2", 2 1/2" to 3"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	750w / 900W (Single Phase)
Power Supply	220V/380V
Speed	11/24 RPM
Weight	125Kg./110Kg.
Packing Size	890 x 515 x 540 mm



NE-T4-100



Product Specification

Machine Size	1/2" to 4" (15 mm to 100 mm)
Dies (BSPT/NPT)	1/2" to 3/4", 1" to 2", 2 1/2" to 4"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	750w / 900W (Single Phase)
Power Supply	220V/380V
Speed	11/22 RPM
Weight	160Kg./140Kg.
Packing Size	950 x 625 x 620 mm

STAND ACCESSORIES



Die Head
Assembly



Reamer
Bracket



Die Sets



Cutting Knife
(Wheel)



Blade
Bracket



Hammer
Chuck Prong

**STOCK
AVAILABILITY**

**Always in
stock**

Our Products

ELECTRIC PIPE THREADING MACHINE

NE-T6-150

Product Specification

Machine Size	2½" to 6" (65 mm to 150 mm)
Dies (BSPT/NPT)	2½" to 4" & 5" to 6"
Thread Application	MS Pipe, GI Pipe & SS Pipe Optional
Motor Power	1100w (Single Phase / 3 Phase)
Power Supply	220V/380V
Speed	9/24 RPM
Weight	250Kg./200Kg.
Packing Size	1100 x 740 x 700 mm



ELECTRIC CONDUIT PIPE THREADING MACHINE

NE-C2-50



Product Specification

Machine Size	C15 to C51 mm
Dies	C15, C19-C31, C39-C51
Thread Application	MS & GI Conduit Pipe
Motor Power	750w/900w (Single Phase)
Power Supply	220V
Speed	28 RPM
Weight	86Kg./75Kg.
Packing Size	710 x 455 x 520 mm

NIPPLE CHUCK

Nipple Chuck Kit

- Holds Shorts or Close Nipples for threading
- For Use with NE-T2-50, NE-T2-50A, NE-T3-80, NE-C2-50 & NE-T4-100,
- Standard Nipple Chuck includes insert and 5 adapters: ½", ¾", 1", 1¼" and 1½" (Nipple Chuck Body Serves as 2" Adapter.)



Ordering Information:

Model No.	Description	Pipe Capacity		N.W(kg)
		(in)	(mm)	
NE25	NPT Nipple Chuck	½-2	12-50	4.5
NE25A	BSPT Nipple Chuck	½-2	12-50	4.5

Our Products

THREADING DIE HEADS LIST

Images	Model No.	For Machines	How Open	Dies Type	Capacity	N.W.(kg.)
	NE-250	NE-T2-50	Receding Self-Open	100 Type	½" to 2"	5.4 Kg.
	NE-250A	NE-T2-50A	Receding Self-Open	100 Type	½" to 2"	5.5 Kg.
	NE-251A	NE-C2-50	Manual Open	Lever Type	½" to 2"	5.3 Kg.
	NE-380	NE-T3-80	Receding Self-Open	100 Type	½" to 2"	6 Kg.
	NE-380A	NE-T3-80	Receding Self-Open	100 Type	2½" to 3"	5.7 Kg.
	NE-410	NE-T4-100	Receding Self-Open	100 Type	½" to 2"	6.6 Kg.
	NE-410A	NE-T4-100	Receding Self-Open	100 Type	2½" to 4"	8.9 Kg.
	NE-615	NE-T6-150	Receding Self-Open	100 Type	2½" to 4"	8.9 Kg.
	NE-615A	NE-T6-150	Receding Self-Open	100 Type	5" to 6"	12.5 Kg.
	NE-33	NEBT33	Manual Open	Lever Type	M10 to M33	5.3 Kg.
	NE-25	NEBT25	Reversible	Round Type	¼" to 1"	3.5 Kg.
	NE-50RT	NE-T2-50RT	Self-Open	Lever Type	½" to 2"	6.1 Kg.

Our Products

ELECTRIC PIPE GROOVING MACHINE

NEG8D

Product Specification

Pipe Capacity	" to 8"
Motor Power	750w Induction, 50/60Hz
Power Supply	220V/380V
Speed	24 RPM
Weight	110Kg.
Max. Wall	1"-8" Sch10/40



NEG8B



Product Specification

Pipe Capacity	1.1/4" to 6"
Motor Power	750w Induction, 50/60Hz
Power Supply	220V/380V
Speed	24 RPM
Weight	75Kg.
Max. Wall	1.1/4" to 6" Sch10/40

NEG12A



Product Specification

Pipe Capacity	2" to 12"
Motor Power	750w (Single Phase)
Power Supply	220V/380V
Speed	24 RPM
Weight	145 Kg.
Packing Size	810 x 440 x 710 mm
Max. Wall	Sch10 2"-12", Sch40 2"-6"



Our Products

ELECTRIC PIPE GROOVING MACHINE

NEG12C

Product Specification

Pipe Capacity	1" to 12"
Motor Power	1100w (Single Phase)
Power Supply	220V/380V
Speed	26 RPM
Weight	140kG./120Kg.
Packing Size	720x615x885 mm
Max. Wall	1"-6" Sch10/40, 8"-12" Sch 10



NEG12D



Product Specification

Pipe Capacity	2" to 12"
Motor Power	1700w (Single Phase)
Power Supply	220V/380V
Speed	24 RPM
Weight	185Kg./165Kg.
Packing Size	960 x 465 x 975 mm
Max. Wall	2"-12" Sch 10/40
Roller	2"-6", 8"-12"
Knurl Wheel	2"-3", 4"-6", 8"-12"

Foot Switch Optional

NEG16B

Product Specification

Pipe Capacity	6" to 16"
Motor Power	2400w
Power Supply	380V/50Hz/3PH
Speed	22 RPM
Weight	140Kg.
Packing Size	820 x 450 x 820 mm
Max. Wall	10 mm
Roller	6"-8", 8"-12", 14"-16
Knurl Wheel	6"-8", 8"-12", 14"-16"



THREAD CUTTING OIL

- Cool Dies during threading process
- Speeds metal removal
- Improves thread quality
- Reduces threading torsion
- Lower operating costs

AVAILABLE OILS & LUBRICANTS VARIOUS APPLICATIONS

• Thread Cutting Oils

- ✓ Water Soluble Oil
- ✓ Threading Machine Oil

• Hydraulic Oil

• Gear Oil

• Engine Oil

• Grease



Nandini



📞 +91-95995 77316, 8700537051
+91-7011593935, 7827142449

✉ nandinientrepreneur@gmail.com
sales@nandinimachines.com

🌐 www.nandinientrepreneur.com
www.nandinipipetools.in

Regd. Off. : Plot No. 1981, Sec - 56/56A
Faridabad - 121004 (Haryana)
Branch Off. : Plot No. 01, Sec - 56A
Faridabad - 121004 (Haryana)



Justdial
India's No.1 local search engine