



EPITOME[®]

LIGHTING



HOME LIGHTING

For Indoor use i.e
House or Apartments



OUTDOOR LIGHTING

Warehouse, Parking Lawns,
Industries, Malls, Highways,
Public Places, Parks etc.



COMMERCIAL LIGHTING

Showrooms, Exhibitions,
Restaurants, Hotels etc.



LED LIGHTING
CATALOGUE



ABOUT US

We Epitome Lighting are pleased to introduce ourselves as one of the Eminent Manufacturing Company of LED Lighting Solutions. These products have surpassed our competitors and earned reputé in the market owing to their quality and high reliability features.

Epitome Lighting India is headquartered in New Delhi, INDIA, and serves entire PAN India & SAARC Countries.

Epitome Lighting is the Leading provider of lighting solutions and applications both for professional and consumer markets, transforming how lighting is used to enhance the human experience in the places where people live and work. Whether at home, on the road, in the city, shopping, at work or at institutes, we are creating lighting solutions that transform environments, create experiences and help shape identities.

We serve our customers through a market segment approach which encompasses Homes, Offices and Outdoor, Industry, Retail, Hospitality, Entertainment, Healthcare and Automotive. For these segments we provide a wide range of offerings from across the entire lighting value chain – from light sources, luminaires and lighting controls to lighting solutions and services. Epitome lighting is driving the switch to energy-efficient solutions. With the use of energy-efficient solutions we will significantly reduce energy consumption around the world and thereby cut harmful Co2 emissions.

EPITOME, a product par excellence, has completed revolutionized the lighting industry. We have been designing, developing and manufacturing LED Lighting products using cutting edge design software and analysis tools. Our state-of-the-art innovation center is equipped with the latest technology platforms to develop aesthetically and functionally superior products at very competitive prices.

We are supported by a well facilitated infrastructure that is equipped with cutting edge technology. The team of talented and experienced professionals helps us in offering a flawless range of products.

LED normally use less power for a given application compared to traditional halogen and fluorescent sources. As such, the overall kW/hr. consumption per year is less hence we at Epitome Lighting helps to reduce the overall Co2 emissions to create a clean and green Environment to help Mother Nature.

Our distribution network enables us to offer products to our clients spread across the Nation and SAARC Countries within stipulated time frame. We have acquired a rich client base not only in the country but also in markets beyond the borders.

We trust the said offer is in line with your requirements. However, please feel free to call us for any further Technical/Commercial clarification required. We look forward to receive your valuable order.

LED DECOR BULB



SPECIFICATION

Available Wattages	: 0.5W
Color	: Red, Green, Blue, Yellow, White
Input Voltage	: AC 100 - 300 V
Base	: B22



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE



LED BULB (POLESTAR)

SPECIFICATION

Available Wattages	: 3W / 5W / 7W / 9W / 12W / 15W / 18W
Outer Diameter (mm)	: 57 / 57 / 57 / 60 / 65 / 65 / 80
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: B22 / E27
Color Rendering Index	: >80
Total Harmonic Distortion	: <20%
Ingress protection	: IP40



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED INVA BULB (AC/DC)



SPECIFICATION

Available Wattages	: 7W / 9W
Outer Diameter (mm)	: 65 / 70 / 75
Charge Time	: 8-10 hours
Emergency Time	: 4 hours (max)
Emergency Power	: 4W
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: B22 / E27



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED HIGHER WATTAGE BULB (HELIOS)

SPECIFICATION

Available Wattages	: 20W / 30W / 40W / 50W
Outer Diameter (mm)	: 80 / 100 / 120 / 140
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 80 - 300 V
Base	: B22 / E27
Color Rendering Index	: >75
Total Harmonic Distortion	: $<10\%$
Ingress protection	: IP40



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED APOLLO SURFACE PANEL



SPECIFICATION

Design	: Round / Square
Available Wattages	: 8W / 12W / 18W / 24W
Outer Diameter (mm)	: 85 / 130 / 175 / 220
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: Recessed
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%



LED APOLLO SLIM PANEL

SPECIFICATION

Design	: Round / Square
Available Wattages	: 6W / 12W / 18W / 24W
Cut-Out Size (inches)	: 3" / 4" / 5.25" / 8"
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
Dispersion angle	: 160°
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%



LED BLISS ULTRA SLIM PANEL

SPECIFICATION

Design	: Round / Square
Available Wattages	: 9W / 15W / 24W
Cut-Out Size (inches)	: 4" / 6" / 8"
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
Dispersion angle	: 160°
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED PANEL LIGHT EDGELIT

SPECIFICATION

Available Wattages	: 1x1 (24W), 2x2 (36W & 48W)
Color Temperature	: 6500K / 4000K / 3000K
Size	: 275x275, 575x575
Lumes / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: Recessed/Surface
Color Rendering Index	: >75
Total Harmonic Distortion	: <10%



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED DEEP LIGHT



SPECIFICATION

Design	: Round
Available Wattage	: 3W / 5W
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: Recessed
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED SPOT LAMP ADJUSTABLE - COB

SPECIFICATION

Available Wattages	: 6W / 12W / 18W / 24W / 32W
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: Recessed Mounted
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%
Ingress Protection	: IP40



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE



SPECIFICATION

Available Wattages	: 6W / 9W
Cut-Out Size (Inches)	: 3"
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: Recessed
Color Rendering Index	: >80
Total Harmonic Distortion	: <15%



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED T-BULB (TRITAN)

SPECIFICATION

Available Wattages	: 10W / 15W
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 80 - 300 V
Base	: B22 / E27
Color Rendering Index	: >75
Total Harmonic Distortion	: <20%
Ingress Protection	: IP40



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE




INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED TUBE LIGHT T5 BATTEN



SPECIFICATION

Available Wattages	: PC 5/6W (1'), 10/12 (2'), 20W (4')
	AL 5/6W (1'), 10/12 (2'), 20W (4')
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Mounting	: Wall Mount / Ceiling Mount
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%
Ingress Protection	: IP40

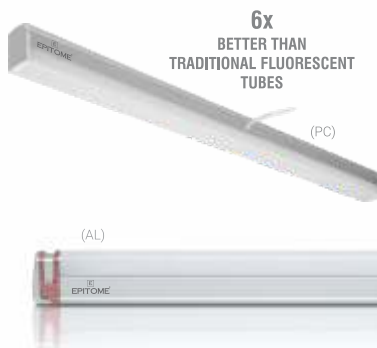

HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED TUBE LIGHT/T8 RETROFIT

SPECIFICATION

Available Wattages	: 10/12W (2') 20W (4')
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: G13
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%
Ingress Protection	: IP40



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE



SPECIFICATION

Available Wattages	: 10W / 20W / 30W / 50W / 100W 150W / 200W / 250W / 300W
Color Temperature	: 6500K / 4000K / 3000K
Dispersion Angle	: 120°
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 5.0 kV surge
Mounting	: Hanging
IP Rate	: IP66
Color Rendering Index	: > 80
Total Harmonic Distortion	: < 10%



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED STREET LIGHT

SPECIFICATION

Available Wattages	: 20W / 25W / 50W / 80W 100W / 150W / 200W
Color Temperature	: 6500K / 4000K / 3000K
Dispersion Angle	: 120°
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF >0.95 and 5.0 kV surge
Input Voltage	: AC 100 - 300 V
Base	: Pole Mount
Color Rendering Index	: > 80
Total Harmonic Distortion	: < 10%
IP Rate	: IP66/65



HEALTHCARE



HOSPITALITY



INDUSTRIAL



COMMERCIAL



IT/ITES



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

LED STRIKER LIGHT



SPECIFICATION

Available Wattages	: 3W / 5W
Color Temperature	: 6500K / 4000K / 3000K
Lumens / Watt	: ≥ 130
PF & Surge Protection	: PF > 0.95 and 4.0 kV surge
Input Voltage	: AC 100 - 300 V
Mounting	: Wall Mount / Ceiling Mount
Color Rendering Index	: >80
Total Harmonic Distortion	: <10%



UPTO 50,000
LIGHTING HOURS



HEAVY DUTY LED DRIVER
WITH >0.95 PF



HIGH BRIGHTNESS
SOFT & FLICKER-FREE



INPUT VOLTAGE 80V-300V
WITH 4.0 kV SURGE

OUR PRODUCTS RANGE





EPITOME[®]
— LIGHTING —

EPITOME LIGHTING

C-185, Naraina Industrial Area, Phase-I, New Delhi - 110 028

E-mail : sales@epitomelighting.com

Website : www.epitomelighting.com